

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 808 072 A2

(12)

# EUROPEAN PATENT APPLICATION

(43) Date of publication:  
19.11.1997 Bulletin 1997/47

(51) Int. Cl.<sup>6</sup>: H04N 9/82

(21) Application number: 97107797.9

(22) Date of filing: 13.05.1997

(84) Designated Contracting States:  
AT BE CH DE ES FR GB IT LI LU NL SE

(30) Priority: 14.05.1996 JP 119067/96

(71) Applicant:  
KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi (JP)

(72) Inventor:  
Hisatomi, Shuichi,  
c/o K. K. Toshiba, Int Prop Div  
Minato-ku Tokyo 105 (JP)

(74) Representative:  
Henkel, Feiler, Hänzel & Partner  
Möhlstrasse 37  
81675 München (DE)

(54) **Recording medium having video data stored therein which is capable of forcibly reproducing sub-picture in accordance with state of reproduction and system for the same**

(57) A recording medium (10) is provided in which video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction is stored. A sub-picture pack sequence (85) for forming a sub-picture data unit (230) stores a unit header, run-length-compressed sub-picture pixel data (232) and a display

sequence table (233). The display sequence table (233) stores a plurality of display sequences (234) and having, described therein, a command for forcibly outputting sub-picture pixel data as the display sequence (234).

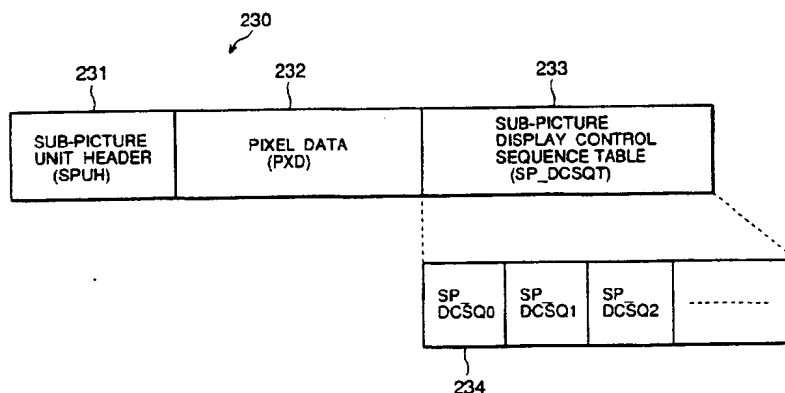


FIG.53

EP 0 808 072 A2

## Description

The present invention relates to a recording medium having, together with video data, sub-picture data stored therein and a reproducing system for the same, and more particularly to a recording medium having video data stored therein which is capable of forcibly reproducing sub-picture in accordance with a state of reproduction and a reproducing system for the same.

Recently, a significant progress has been achieved in developing an optical disk reproducing apparatus adaptable to time-varying images.

The apparatus of the foregoing type is arranged such that data is reproduced from an optical disk which is a recording medium, on which digital data of, images, audio and the like, has been compressed and recorded at a high density and a monitor or a speaker unit is operated in accordance with reproduced digital data. If optical disk reproducing apparatuses of the foregoing type will be mass-produced in the future, a multiplicity of manufacturers are expected to provide a variety of software of motion pictures, those of singing to taped accompaniment and the like.

Hitherto, video tapes have been employed as usual image recording mediums. The video tape having a smaller recording capacity per unit area than that of the optical disk does not permit a complicated random access. Therefore, video data is usually recorded together with audio data such that video data is, as an option, recorded together with single sub-picture data. Audio data and sub-picture data are selectively reproduced by a conventional reproducing system. Since state and time of reproduction of sub-picture data are not controlled, sub-pictures provided for respective scenes cannot be switched.

Video recording mediums having English captions have been widely used in U.S.A.. The English caption is recorded on the recording medium as a form of sub-picture data. Then, a system for reproducing the foregoing recording medium selectively turns on or off the English caption. If the English caption is turned off, the reproducing system continuously disables the display of the English caption regardless of a speech expressed by audio data which is reproduced together with sub-picture data.

If a recording medium stores a movie containing a scene in which a speech in a language except for English is expressed, there arises the following problem. If the English caption of the reproducing apparatus is turned off, any English caption is not displayed even in a case where a speech in another language is output. Specifically, a corresponding scene can be considered in which a hero travels from an English language zone to a French language and thus the hero speaks French. If no English caption corresponding to the French speech is displayed, audiences in the English language zone cannot understand the foregoing speech. Similarly, a corresponding scene can be considered in which a hero looks at a label of a medicine written in German.

If no English caption indicating the label written in German is displayed, audiences in the English language zone cannot understand the type of the medicine.

The above-mentioned problem can be solved by preparing an additional English caption which is turned on when the main English caption has been turned off and which relates to a speech in a language except for English. In this case, a recording space having a capacity of two times is required to record sub-picture data for the main English caption and sub-picture data for the additional English caption.

A first object of the present invention is to provide a recording medium in which video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction is stored.

A second object of the present invention is to provide a reproducing system for causing a sub-picture to be adequately displayed in accordance with a state of reproduction from a recording medium, in which video data capable of forcibly reproducing the sub-picture is stored.

A third object of the present invention is to provide a reproducing method of causing a sub-picture to be adequately displayed in accordance with a state of reproduction from a recording medium, in which video data capable of forcibly reproducing the sub-picture is stored.

A fourth object of the present invention is to provide a method of recording sub-picture data together with video data on a recording medium, in which video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction is stored.

A fifth object of the present invention is to provide an apparatus for recording sub-picture data together with video data on a recording medium, in which video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction is stored.

A sixth object of the present invention is to provide a communication system for transferring, together with sub-picture data, video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction.

According to one aspect of the present invention, there is provided a recording medium having a data pack sequence composed of recorded packs in each of which video data, audio data and sub-picture data respectively are stored, the recording medium comprising:

a sub-picture data unit composed of a plurality of sub-picture packs, wherein control information for controlling reproduction of sub-picture data is described in the sub-picture data unit.

According to another aspect of the present invention, there is provided a reproducing method structured such that a sub-picture is reproduced from a recording medium having a data pack sequence composed of

recorded packs in each of which video data, audio data and sub-picture data respectively are stored, the reproducing method comprising the steps of:

acquiring a sub-picture data unit composed of a plurality of sub-picture packs from the recording medium; and  
acquiring control information for controlling reproduction of sub-picture data described in the sub-picture data unit to control output of pixel data in the sub-picture data unit in accordance with acquired control information.

According to another aspect of the present invention, there is provided a reproducing apparatus for reproducing a sub-picture from a recording medium having a data pack sequence composed of recorded packs in each of which video data, audio data and sub-picture data respectively are stored, the reproducing apparatus comprising:

means for retrieving a sub-picture data unit composed of a plurality of sub-picture packs from the recording medium; and  
means for retrieving control information for controlling reproduction of sub-picture data described in the sub-picture data unit to control output of pixel data in the sub-picture data unit in accordance with retrieved control information.

According to another aspect of the present invention, there is provided a recording method structured such that a data pack sequence consisting of packs in each of which video data, audio data and sub-picture data respectively are stored is recorded on a recording medium, the recording method comprising the steps of:

forming a sub-picture data unit by a plurality of sub-picture packs; and  
describing control information for controlling reproduction of sub-picture data in the sub-picture data unit.

According to another aspect of the present invention, there is provided a recording apparatus for recording, on a recording medium, a data pack sequence consisting of packs in each of which video data, audio data and sub-picture data respectively are stored, the recording apparatus comprising:

means for forming a sub-picture data unit by a plurality of sub-picture packs; and  
means for describing control information for controlling reproduction of sub-picture data in the sub-picture data unit.

According to another aspect of the present invention, there is provided a communication apparatus for transferring a data pack sequence consisting of packs

respectively storing video data, audio data and sub-picture data, the communication apparatus comprising:

means for transferring, to the recording medium, a sub-picture data unit composed of a plurality of sub-picture packs, the means being transferring means for transferring control information for controlling reproduction of sub-picture data to be described in the sub-picture data unit and controlling output of pixel data in the sub-picture data unit in accordance with transferred control information.

This invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a block diagram schematically showing an optical disk apparatus;

FIG. 2 is a block diagram showing details of the mechanism of a disk drive section shown in FIG. 1;

FIG. 3 is a perspective view schematically showing the structure of an optical disk shown in FIG. 1;

FIG. 4 shows a structure of a logic format of an optical disk shown in FIG. 3;

FIG. 5 shows a structure of a video manager shown in FIG. 4;

FIG. 6 shows a structure of a video object set (VOBS) shown in FIG. 5;

FIG. 7 shows parameters and contents of a volume manager information management table (VMGI\_MAT) in the video manager (VMGI) shown in FIG. 6;

FIG. 8 shows a structure of a title search pointer table (TSPT) in the video manager (VMGI) shown in FIG. 6;

FIG. 9 shows parameters and contents of title search pointer table information (TSPTI) of the title search pointer table (TSPT) shown in FIG. 8;

FIG. 10 shows parameters and contents of a title search pointer (TT\_SRP) corresponding to an input number of the title search pointer table (TSPT) shown in FIG. 8;

FIG. 11 is a view for describing the structure of a program chain stored in the file;

FIG. 12 shows a structure of a video manager menu PGCI unit table (VMGM\_PGCI\_UT) shown in FIG. 8;

FIG. 13 shows parameters and contents of VMGM\_PGCI unit table information shown in FIG. 12;

FIG. 14 shows parameters and contents of a video manager menu language unit search pointer shown in FIG. 12;

FIG. 15 shows a structure of a video manager menu language unit shown in FIG. 12;

FIG. 16 shows parameters and contents of video manager menu language unit information shown in FIG. 15;

FIG. 17 shows parameters and contents of video

manager menu program chain information shown in FIG. 15;

FIG. 18 shows a structure of a video title set attribute table shown in FIG. 5;

FIG. 19 shows parameters and contents of video title set attribute table information shown in FIG. 18;

FIG. 20 shows parameters and contents of a video title set attribute search pointer shown in FIG. 18;

FIG. 21 shows parameters and contents of video title set attribute shown in FIG. 18;

FIG. 22 shows a structure of a video title set shown in FIG. 4;

FIG. 23 shows parameters and contents of a management table (VTSI\_MAT) of video title set information (VTSI) shown in FIG. 22;

FIG. 24 shows a structure of a video title set part of title search pointer table (VTS\_PTT\_SRPT) shown in FIG. 22;

FIG. 25 shows parameters and contents of part of title search pointer information (PTT\_SRPTI) shown in FIG. 24;

FIG. 26 shows parameters and contents of a title unit search pointer (TTU\_SRP) shown in FIG. 24;

FIG. 27 shows parameters and contents of a part of title search pointer (PTT\_SRP) shown in FIG. 24;

FIG. 28 shows a structure of a table (VTS\_PGCIT) of video title set program chain information shown in FIG. 22;

FIG. 29 shows parameters and contents of information (VTS\_PGCITI) of a table (VTS\_PGCIT) of video title set program chain information shown in FIG. 28;

FIG. 30 shows parameters and contents of a search pointer (VTS\_PGCIT\_SRP) of the table (VTS\_PGCIT) of the video title set program chain information shown in FIG. 28;

FIG. 31 shows a structure of program chain information (VTS\_PGCI) for video title set corresponding to the program chain of video title set program chain information (VTS\_PGCI) shown in FIG. 28;

FIG. 32 shows parameters and contents of general information (PGC\_GI) of a program chain of program chain information (VTS\_PGCI) shown FIG. 31;

FIG. 33 shows a structure of a program chain map (PGC\_PGMAP) of program chain information (VTS\_PGCI) shown in FIG. 31;

FIG. 34 shows parameters and contents of an entry cell number (ECELLN) of a program described on a program chain map (PGC\_PGMAP) shown in FIG. 33;

FIG. 35 shows a structure of a cell playback information table (C\_PBIT) of program chain information (VTS\_PGCI) shown in FIG. 33;

FIG. 36 shows parameters and contents of cell playback information (C\_PBI) on the cell playback information table (C\_PBIT) shown in FIG. 35;

FIG. 37 shows a structure of cell position information (C\_POSI) of program chain information

(VTS\_PGCI) shown in FIG. 35;

FIG. 38 shows parameters and contents of the cell position information (C\_POSI) shown in FIG. 37;

FIG. 39 shows a structure of a video title set menu PGC unit table shown in FIG. 22;

FIG. 40 shows parameters and contents of video title set PGC unit table information shown in FIG. 39;

FIG. 41 shows parameters and contents of a video title set language search pointer shown in FIG. 39;

FIG. 42 shows a structure of a video title set menu language unit shown in FIG. 39;

FIG. 43 shows parameters and contents of video title set menu language unit information shown in FIG. 42;

FIG. 44 shows parameters and contents of a video title set PGC search pointer shown in FIG. 42;

FIG. 45 shows a structure of a navigation pack shown in FIG. 6;

FIG. 46 shows a structure of a video, audio or sub-picture pack shown in FIG. 6;

FIG. 47 shows parameters and contents of presentation control information (PCI) of the navigation pack shown in FIG. 45;

FIG. 48 shows parameters and contents of general information (PCI\_GI) in presentation control information (PCI) shown in FIG. 45;

FIG. 49 shows parameters and contents of disk search information (DSI) of the navigation pack shown in FIG. 48;

FIG. 50 shows parameters and contents of DSI general information (DSI\_GI) of disk search information (DSI) shown in FIG. 49;

FIG. 51 shows parameters and contents of synchronous playback information (SYNCl) of video object (VOB) shown in FIG. 49;

FIG. 52 shows the relationship between a sub-picture pack and the sub-picture data unit (SPU) shown in FIG. 6;

FIG. 53 shows the structure of data in the sub-picture data unit (SPU) shown in FIG. 52;

FIG. 54 shows parameters and contents of unit headers (SPUH) of the sub-picture data units shown in FIG. 53;

FIG. 55 shows parameters and contents in a display sequence control table (SP\_DCSQT) of the sub-picture data unit (SPU) shown in FIG. 53;

FIG. 56 shows command names and contents of the display control commands (SP\_DCSQT) shown in FIG. 55;

FIG. 57 is a block diagram showing the structure of a circuit in the sub-picture decoder 62 shown in FIG. 1;

FIG. 58 shows an operation flow from the start of the operation of the apparatus to the acquisition of the video title set;

FIG. 59 is a flow chart illustrating a video manager menu search operation;

FIG. 60 is a flow chart illustrating a video title set

menu search operation;

FIG. 61 is flow chart illustrating a procedure for acquiring a video title set and reproducing a PGC; FIG. 62 is a flow chart of a reproducing process of the sub-picture data unit;

FIG. 63A and FIG. 63B are another flow chart of a reproducing process of the sub-picture data unit; FIG. 64 is a block diagram illustrating an encoder system for encoding video data and generating a video file;

FIG. 65 is a flow chart illustrating an encoding process in the encoder system shown in FIG. 64;

FIG. 66 is a flow chart illustrating a process of forming a video data file by combining video data, audio data and sub-picture data encoded by the flow of FIG. 65;

FIG. 67 is a block diagram showing a disk formatter system for recording a formatted video file on the optical disk;

FIG. 68 is a flow chart for producing logic data to be recorded on the disk, in the disk formatter shown in FIG. 67;

FIG. 69 is a flow chart for producing, from the logic data, physical data to be recorded on the disk; and FIG. 70 schematically shows a system for transferring the video title set shown in FIG. 22 through a communication system.

Hereinafter, referring to the accompanying drawings, an optical disk and an optical disk reproducing apparatus according to an embodiment of the present invention will be explained.

FIG. 1 is a block diagram of an optical disk reproducing apparatus that reproduces data from an optical disk associated with the embodiment of the present invention. FIG. 2 is a block diagram of a disk drive section that drives the optical disk shown in FIG. 1. FIG. 3 shows the structure of the optical disk shown in FIGS. 1 and 2.

As shown in FIG. 1, the optical disk reproducing apparatus comprises a key/display section 4, a monitor section 6, and a speaker section 8. When the user operates the key/display section 4, this causes the recorded data to be reproduced from an optical disk 10. The recorded data contains video data, sub-picture data, and audio data, which are converted into video signals and audio signals. The monitor section 6 displays images according to the video signals and the speaker section 8 generates sound according to the audio signals.

It is known that the optical disk 10 is available with various structures. For instance, one type of the optical disk 10 is a read-only disk on which data is recorded with a high density as shown in FIG. 3. The optical disk 10, as shown in FIG. 3, is made up of a pair of composite layers 18 and an adhesive layer 20 sandwiched between the composite disk layers 18. Each of the composite disk layers 18 is composed of a transparent substrate 14 and a recording layer or a light-reflecting layer

16. The disk layer 18 is arranged so that the light-reflecting layer 16 may be in contact with the surface of the adhesive layer 20. A center hole 22 is made in the optical disk 10. On the periphery of the center hole 22 on both sides, clamping areas 24 are provided which are used to clamp the optical disk 10 during its rotation. When the disk 10 is loaded in the optical disk apparatus, the spindle of a spindle motor 12 shown in FIG. 2 is inserted into the center hole 22. As long as the disk is being rotated, it continues clamped at the clamping areas 24.

As shown in FIG. 3, the optical disk 10 has an information zone 25 around the clamping zone 24 on each side, the information zones allowing the information to be recorded on the optical disk 10. In each information area 25, its outer circumference area is determined to be a lead-out area 26 in which no information is normally recorded, its inner circumference area adjoining the clamping area 24 is determined to be a lead-in area 27 in which no information is normally recorded, and the area between the lead-out area 26 and the lead-in area 27 is determined to be a data recording area 28.

At the recording layer 16 in the information area 25, a continuous spiral track is normally formed as an area in which data is to be recorded. The continuous track is divided into a plurality of physical sectors, which are assigned serial numbers. On the basis of the sectors, data is recorded. The data recording area 28 in the information recording area 25 is an actual data recording area, in which reproduction data, video data, sub-picture data, and audio data are recorded in the form of pits (that is, in the form of changes in the physical state), as will be explained later. With the read-only optical disk 10, a train of pits is formed in advance in the transparent substrate 14 by a stamper, a reflecting layer is formed by deposition on the surface of the transparent substrate 14 in which the pit train is formed, and the reflecting layer serves as the recording layer 16. In the read-only optical disk 10, a groove is normally not provided as a track and the pit train in the surface of the transparent substrate 14 serves as a track.

The optical disk apparatus 12, as shown in FIG. 1, further comprises a disk drive section 30, a system CPU section 50, a system ROM/RAM section 52, a system processor section 54, a data RAM section 56, a video decoder section 58, an audio decoder section 60, a sub-picture decoder section 62, and a D/A and data reproducing section 64.

As shown in FIG. 2, the disk drive section 30 contains a motor driving circuit 11, a spindle motor 12, an optical head 32 (i.e., an optical pickup), a feed motor 33, a focus circuit 36, a feed motor driving circuit 37, a tracking circuit 38, a head amplifier 40, and a servo processing circuit 44. The optical disk 10 is placed on the spindle motor 12 driven by the motor driving circuit 11 and is rotated by the spindle motor 12. The optical head 32 that projects a laser beam on the optical disk 10 is located under the optical disk 10. The optical head 32 is placed on a guide mechanism (not shown). The feed

motor driving circuit 37 is provided to supply a driving signal to the feed motor 33. The motor 33 is driven by the driving signal and moves in and out the optical head 32 across the radius of the optical disk 10. The optical head 32 is provided with an objective lens 34 positioned so as to face the optical disk 10. The objective lens 34 is moved according to the driving signal supplied from the focus circuit 36 so as to move along its optical axis.

To reproduce the data from the above optical disk 10, the optical head 32 projects a laser beam on the optical disk 10 via the objective lens 34. The objective lens 34 is moved little by little across the radius of the optical disk 10 according to the driving signal supplied from the tracking circuit 38. Furthermore, the objective lens 34 is moved along its optical axis according to the driving signal supplied from the focusing circuit 36 so that its focal point may be positioned on the recording layer 16 of the optical disk 10. This causes the laser beam to form the smallest beam spot on the spiral track (i.e., the pit train), enabling the beam spot to trace the track. The laser beam is reflected from the recording layer 16 and returned to the optical head 32. The optical head 32 converts the beam reflected from the optical disk 10 into an electric signal, which is supplied from the optical head 32 to the servo processing circuit 44 via the head amplifier 40. From the electric signal, the servo processing circuit 44 produces a focus signal, a tracking signal, and a motor control signal and supplies these signals to the focus circuit 36, tracking circuit 38, and motor driving circuit 11, respectively.

Therefore, the objective lens 34 is moved along its optical axis and across the radius of the optical disk 10, its focal point is positioned on the recording layer 16 of the optical disk 10, and the laser beam forms the smallest beam spot on the spiral track. Furthermore, the spindle motor 12 is rotated by the motor driving circuit 11 at a specific rotating speed. This allows the beam to track, for example, at a constant linear speed.

The system CPU section 50 of FIG. 1 supplies to the servo processing circuit 44 a control signal serving as an access signal. In response to the control signal, the servo processing circuit 44 supplies a head-moving signal to the feed motor driving circuit 37, which supplies a driving signal to the feed motor 33. Then, the feed motor 33 is driven, causing the optical head 32 to move across the radius of the optical disk 10. Then, the optical head 32 accesses a specific sector formed at the recording layer 16 of the optical disk 10. The data is reproduced from the specific sector by the optical head 32, which then supplies it to the head amplifier 40. The head amplifier 40 amplifies the reproduced data, which is outputted at the disk drive section 30.

The reproduced data is transferred and stored in the data RAM section 56 by the system processor section 54 which is controlled by the system CPU section 50 which is operated in accordance with the programs stored in the system ROM/RAM section 52. The stored reproduced data is processed at the system processor section 54, which sorts the data into video data, audio

data, and sub-picture data, which are supplied to the video decoder section 58, audio decoder section 60, and sub-picture decoder section 62, respectively, and are decoded at the respective decoders. The D/A and data-reproducing section 64 converts the decoded video data, audio data, and sub-picture data into an analog video signal and an analog audio signal, and supplies the resulting video signal to the monitor 6 and the resulting audio signal to the speaker 8. Then, on the basis of the video signal and sub-picture signal, images are displayed on the monitor section 6 and according to the audio signal, sound is simultaneously reproduced at the speaker section 8.

The operation of the optical disk apparatus shown in FIG. 1 will be described in greater detail along with the logic formats of the optical disk 10.

FIG. 4 shows the structure of the theoretical format of an optical disk 10 shown in FIG. 1. The data recording area 28 between the lead-in area 27 and the lead-out area 26 on the optical disk 10 of FIG. 1 has a volume and file structure as shown in FIG. 4. The structure has been determined in conformity to specific logic format standards, such as micro UDF or ISO 9660. The data recording area 28 is physically divided into a plurality of sectors as described earlier. These physical sectors are assigned serial numbers. In the following explanation, a logical address means a logical sector number (LSN) as determined in micro UDF or ISO 9660. Like a physical sector, a logical sector contains 2048 bytes. The numbers (LSN) of logical sectors are assigned consecutively in ascending order as the physical sector number increments.

As shown in FIG. 4, the volume and file structure is a hierarchical structure and contains a volume and file structure area 100, a video manager (VMG) 101, at least one video title set (VTS) 102, and other recorded areas 73. These areas are partitioned at the boundaries between logical sectors. As with a conventional CD, a logical sector is defined as a set of 2048 bytes. Similarly, a logical block is defined as a set of 2048 bytes. Therefore, a single logical sector is defined as a single logical block.

The file structure area 100 corresponds to a management area determined in micro UDF or ISO 9660. According to the description in the management area, the video manager 101 is stored in the system ROM/RAM section 52. As explained with reference to FIG. 5, the information used to manage video title sets is described in the video manager, which is composed of a plurality of files 104, starting with file #0. In each video title set (VTS) 102, compressed video data, compressed audio data, compressed sub-picture data, and the playback information about these data items are stored as explained later. Each video title set is composed of a plurality of files 104. The number of video title sets is limited to 99 maximum. Furthermore, the number of files 104 (from File #j to File #j+12) constituting each video title set is 12 at most. These files are also partitioned at the boundaries between logical sectors.

In the other recorded areas 73, the information capable of using the video title sets 102 is recorded. The other recorded areas 103 are not necessarily provided.

As shown in FIG. 5, the video manager 101 contains at least three items each corresponding to individual files 104. Specifically, the video manager 101 is made up of video manager information (VMGI) 105, a video object set (VMGM\_VOBS) 106 for video manager menu, and backup (VMGI\_BUP) 107 of video manager information. Here, the volume manager information (VMGI) 105 and the backup (VMGI\_BUP) 107 of video manager information are determined to be indispensable items, and the video object set (VMGM\_VOBS) 106 for video manager menu is determined to be an optional item. In the video object set (VMGM\_VOBS) 106 for VMGM, the video data, audio data, and sub-picture data for a menu of the volumes of the optical disk managed by the video manager 101 are stored.

As in the case of video reproduction which will be explained later, the volume name of the optical disk and the explanation of the audio and sub-picture accompanied by the display of the volume name are displayed by the video object set (VMGM\_VOBS) 106 for VMGM, and selectable items are displayed by the sub-picture. If video data of all matches a boxer X had fought until he won the world championship is reproduced by the video object set (VMGM\_VOBS) 106, the fighting pose of Boxer X will be displayed along with the volume name showing his glorious fighting history, the theme song for him will be generated, and his fighting history will be displayed by the sub-picture. Further, questions are made to the user as to in which language (English or Japanese) the narration should be presented, and as to in which other language the subtitle should be presented by the sub-picture. Thus, the video object set (VMGM\_VOBS) 106 for VMGM enables the user to enjoy seeing any match Boxer X has fought, while listing to the narration in, for example, English and reading the subtitle in, for example, Japanese.

The structure of a video object set (VOBS) 82 will be described with reference to FIG. 6. FIG. 6 shows an example of a video object set (VOBS) 82. The video object set (VOBS) 82 is provided in three types 106, 141 and 142 for two menus and a title. Specifically, in the video object set (VOBS) 82, a video title set (VTS) 102 contains a video object set (VTSM\_VOBS) 82 for a menu of video title sets and a video object set (VTST\_VOBS) 142 for the titles of at least one video title set, as will be explained later. Each video object set 82 has the same structure except that their uses differ.

As shown in FIG. 6, a video object set (VOBS) 82 is defined as a set of one or more video objects (VOB) 83. The video objects 83 in a video object set (VOBS) 82 are used for the same application. A video object set (VOBS) 83 for menus is usually made up of a single video object (VOB) 83 and stores the data used to display a plurality of menu screens. In contrast, a video object set (VTST\_VOBS) 82 for title sets is usually

composed of a plurality of video objects (VOB) 83.

Taking the boxing match as example, a video object (VOB) 83 corresponds to the video data of each match played by Boxer X. Specifying a particular video object (VOB) enables, for example, Boxer X's eleventh match for a world championship to be reproduced on a video. The video object set (VTSM\_VOBS) 82 for a menu of the video title sets 102 contains the menu data for the matches played by boxer X. According to the presentation of the menu, a particular match, for example, Boxer X's eleventh match for a world championship, can be specified. In the case of a usual single story movie, one video object (VOB) 83 corresponds to one video object set (VOBS) 82. One video stream is completed with one video object set (VOBS) 82. In the case of a collection of animated cartoons or an omnibus movie, a plurality of video streams each corresponding to individual stories are provided in a single video object set (VOBS) 82. Each video stream is stored in the corresponding video object. Accordingly, the audio stream and sub-picture stream related to the video stream are also completed with each video object (VOB) 83.

An identification number (IDN#) is assigned to a video object (VOB) 83. By the identification number, the video object (VOB) 83 can be identified. A single video object (VOB) 83 is made up of one or more cells 84. Although a usual video stream is made up of a plurality of cells, a menu video stream, or a video object (VOB) 83 may be composed of one cell 84. A cell is likewise assigned an identification number (C\_IDN#). By the identification number (C\_IDN#), the cell 84 is identified.

As shown in FIG. 6, each cell 84 is composed of one or more video object units (VOBU) 85, usually a plurality of video object units (VOBU) 85. A video object unit (VOBU) 85 is defined as a pack train having a single navigation pack (NAV pack) 86 at its head. Specifically, a video object unit (VOBU) 85 is defined as a set of all the packs recorded, starting at a navigation pack (NAV pack) to immediately in front of the next navigation pack. The playback time of the video object unit (VOBU) corresponds to the playback time of the video data made up of one or more GOPs (Group of Pictures) contained in the video object (VOBU). The playback time is set at 0.4 seconds or more second and less than one second. In the MPEG standard, a single GOP is set at, usually, 0.5 seconds; it is compressed screen data for reproducing about 15 screens during that period.

When a video object unit includes video data as shown in FIG. 6, more than one GOP composed of video packs (V packs) 88, a sub-picture pack (SP pack) 90, and an audio pack (A pack) 91 all determined in the MPEG standard, are arranged to produce a video data stream. Regardless of the number of GOPs, a video object unit (VOBU) 85 is determined on the basis of the playback time of a GOP. The video object always has a navigation pack (NV pack) 86 at its head. Even when the playback data consists only of audio and/or sub-picture data, it will be constructed using the video object unit as a unit. Specifically, even if a video object unit is



constructed only of audio packs, the audio packs to be reproduced within the playback time of the video object unit to which the audio data belongs will be stored in the video object unit, as with the video object of video data.

The video manager 101 will be explained with reference to FIG. 5. The video management information 105 placed at the head of the video manager 101 contains information on the video manager itself, the information used to search for titles, the information used to reproduce the video manager menu, and the information used to manage the video title sets (VTS) 102 such as the attribute information on video titles. The volume management information contains four tables 108, 109, 111, and 110 in the order shown in FIG. 27. Each of these tables 108, 109, 111, and 110 is aligned with the boundaries between logical sectors. A first table, a video manager information management table (VMGI\_MAT) 108, is a mandatory table. Written in the first table are the size of the video manager 101, the start address of each piece of the information in the video manager 101, and the start address of and the attribute information about the video object set (VMGM\_VOBS) 106 for a video manager menu. As explained later, the attribute information includes the video attribute information, the audio attribute information, and the sub-picture attribute information. According to these pieces of attribute information, the modes of the decoders 58, 60 and 62 are changed, thereby enabling the video object set (VMGM\_VOBS) 106 to be reproduced in a suitable mode.

Written in a second table of the video manager 101, i.e., a title search pointer table (TT\_SRPT) 109, are the start addresses of the video titles stored on the optical disk 10 that are selectable according to a title number entered from the key/display section 4 on the apparatus.

A video manager menu PGCI unit table (VMGM\_PGCI\_UT) 110 which is a third table of a video manager 101 is an essential factor if a video object (VMGM\_VOB) 106 for a video manager menu is provided. The video object (VMGM\_VOB) 106 for the video manager menu includes program chains corresponding to various languages and has described information relating to the program chains for the menu corresponding to the respective languages.

Described in a fourth table of the video manager 101 are a video title set attribution table (VTS\_ATRT) 111, the attribute information determined in the video title set (VTS) 102 in the volumes of the optical disk. Specifically, in this table, the following items are described is attribute information such as the number of video title sets (VTS) 102, video title set (VTS) 102 numbers, video attributes, such as a video data compression scheme, audio stream attributes, such as an audio coding mode, and sub-picture attributes, such as the type of sub-picture display.

The details of the contents of the video management information management table (VMGI\_MAT) 108, video manager menu PGCI unit table (VMGM\_PGCI\_UT) 110 and title search pointer table

(TT\_SRPT) 109 will be described with reference to FIGS. 7 to 17.

As shown in FIG. 7, described in the video management information management table (VMGI\_MAT) 108 are an identifier (VMG\_ID) for the video manager 101, the end address (VMG\_EA) of the VMG with relative logical block number from the first logical block of the VMG and the end address (VMGI\_EA) of the VMGI size with relative logical block number from the first logical block of the VMG, wherein one logical block is defined as 2048 bytes as described before, the version number (VERN) related to the standard for the optical disk, commonly known as a digital versatile disk (digital multipurpose disk, hereinafter, referred to as a DVD), and the category (VMG\_CAT) of the video manager 101.

Described in the category (VMG\_CAT) of the video manager 101, a flag indicating whether or not the DVD video directory inhibits copying. Further described in the table (VMGI\_MAT) 108 are a volume set identifier (VLSM\_ID), the number of video title sets (VTS\_Ns), the identifier for a provider supplying the data to be recorded on the disk (PVR\_ID), the start address (VMGM\_VOBS\_SA) of the video object set (VMGM\_VOBS) 106 for a video manager menu, the end address (VMGI\_MAT\_EA) of a volume manager information management table (VMGI\_MAT) 108, and the start address (TT\_SRPT\_SA) of a title search pointer table (TT\_SRPT) 109. If the video object set (VMGM\_VOBS) 141 for the VMG menu is absent, "00000000h" will be described in its start address (VMGM\_VOBS\_SA). The end address (VMGI\_MAT\_EA) of VMG\_MAT 108 is described by the number of bytes, relative to the head byte of VMGI\_MAT 108. The start address (TT\_SRPT\_SA) of the TT-SRPT 109 is described by the number of logical blocks, relative to the head logical block of VMGI 105.

Furthermore, in the table 108, the start address (VMGM\_PGCI\_UT\_SA) of the video manager menu PGCI unit table (VMGM\_PGCI\_UT) and the start address (VTS\_ATRT\_SA) of the attribute table (VTS\_ATRT) of video title sets (VTS) 102 are represented by the number of bytes, relative to the first byte in the VMGI manager table (VMGI\_MAT) 108. Also described in the table 108 is the video attribute (VMGM\_V\_ATR) of the video manager menu (VMGM) video object set 106. Further described in the table 108 are the number (VMGM\_AST\_Ns) of audio streams in the video manager menu (VMGM), the attributes (VMGI\_AST\_ATR) of audio streams in the video manager menu (VMGM), the number (VMGM\_SPST\_Ns) of sub-picture streams in the video manager menu (VMGM), and the attributes (VMGM\_SPST\_ATR) of sub-picture streams in the video manager menu (VMGM). When the video manager menu (VMGM) is not present, "00000000h" is described in the video manager menu PGCI unit table (VMGM\_PGCI\_UT).

Explanation of the structure shown in FIG. 5 will be resumed. In the title search pointer table (TT\_SRPT) 109 of FIG. 5, the title search pointer table information



(TSPTI) is first described as shown in FIG. 8. Then, as many title search pointers (TT\_SRP) for input numbers 1 to n ( $n \leq 99$ ) as are needed are described consecutively. When only the playback data for a single title, for example, only the video data for a single title, is stored in a volume of the optical disk, only a single title search pointer (TT\_SRP) 121 is described in the table (TT\_SRPT) 109.

The title search pointer table information (TSPTI) 120 contains the number (TT\_SRP\_Ns) of title search pointers (TT\_SRP) and the end address (TT\_SRPT\_EA) of the title search pointer (TT\_SRP) 121 as shown in FIG. 9. The address (TT\_SRPT\_EA) is represented by the number of bytes, relative to the first byte in the title search pointer table (TT\_SRPT) 109. As shown in FIG. 10, described in each title search pointer (TT\_SRP) are: a title playback type (TT\_PB\_TY), number of angle (AGL\_Ns), a video title set number (VTSN), the number of parts of title (TT\_Ns), VTS title number (VTS\_TTN) which is used to access the corresponding TTU in the VTS\_PTT\_SRP of the VTS which is indicated with VTSN, and the video start address (VTS\_SA) of the video title set 102.

The contents of the title search pointer (TT\_SRP) 121 specifies a video title set to be reproduced and a program chain (PGC) as well as a location in which the video title set 102 is to be stored. The start address (VTS\_SA) of the video title set 102 is represented by the number of logical blocks in connection with the title set specified by the video title set number (VTSN).

A program chain 87 is defined as a set of programs 89 that reproduce the story of a title, as shown in FIG. 11. In the case of a program chain for a menu, still picture programs or moving picture programs are reproduced one after another to complete a menu for a single title. In the case of a program chain for a title set, a program chain corresponds to a chapter in a story consisting of programs and the movie of a single title is completed by reproducing program chains consecutively. As shown in FIG. 11, each program 89 is defined as a set of aforementioned cells 84 arranged in the order in which they are to be reproduced.

In the video manager menu PGCi unit table (VMGM\_PGCi\_UT) 125 shown in FIG. 5, video manager menu PGCi unit table information (VMGM\_PGCi\_UTI) 180 is first described as shown in FIG. 12. Video manager menu language unit search pointers (VMGM\_LU\_SRP) 126 are successively described in the same numbers as the number n of languages. And the video manager menu language unit (VMGM\_LU) 52 searched for by the search pointer is described. In this case, it is supposed that the menu defined by the video manager menu language unit (VMGM\_LU) must contain only one PGC.

In the video manager menu PGCi unit table information (VMGM\_PGCi\_UTI) 110, the number (VMGM\_LU\_Ns) of VMGM language units (VMGM\_LU) and the end address (VMGM\_PGCi\_UT\_EA) of the VMGM\_PGCi unit table (VMGM\_PGCi\_UT) 110 are

described as shown in FIG. 13. In each of n video manager menu language unit search pointers (VMGM\_LU\_SRP) 126 prepared for respective languages, the language code (VMGM\_LCD) of the video manager menu and the start address (VMGM\_LU\_SA) of the language unit (VMGM\_LU) of the video manager menu (VMGM) are described as shown in FIG. 14. The end address (VMGM\_PGCi\_UT\_EA) of the VMGM\_PGCi\_UT 110 and the start address (VMGM\_LU\_SA) of the VMGM\_LU 127 are described by use of the logical block number from the head byte of the VMGM\_PGCi unit table (VMGM\_PGCi\_UT) 110.

In each of n VMGM language units (VMGM\_LU) 127 prepared for the respective languages, the video manager menu language unit information (VMGM\_LUI) 130 and VMGM\_PGCi search pointers (VMGM\_PGCi\_SRP) 131 of a number corresponding to the number of menu program chains are provided as shown in FIG. 37, and VMGM\_PGCi information items (VMGM\_PGCi) 132 searched for by the search pointer and corresponding in number to the program chains for menu are provided.

In each language unit information (VMGM\_LUI) 130, the number (VMGM\_PGCi\_SRP\_Ns) of search pointers of VMGM\_PGCi and the end address (VMGM\_LUI\_EA) of the language unit information (VMGM\_LUI) are described as shown in FIG. 16. Further, in each VMGM\_PGCi search pointer (VMGM\_PGCi\_SRP), the VMGM\_PGCi category (VMGM\_PGCi\_CAT) and the start address (VMGM\_PGCi\_SA) of VMGM\_PGCi are described as shown in FIG. 17. The end address (VMGM\_LUI\_EA) of VMGM\_LUI and the start address (VMGM\_PGCi\_SA) of VMGM\_PGCi are described by use of the relative logical block number from the head byte of VMGM\_LU. As the VMGM\_PGCi category (VMGM\_PGCi\_CAT), information indicating that the program chain is an entry program chain or title menu is described.

As shown in FIG. 18, the video title set attribute table (VTS\_ATRT) 111 describing the attribute information on the video title set (VTS) 102 (shown in FIG. 4) contains video title set attribute table information (VTS\_ATRTI) 133, n video title set attribute search pointers (VTS\_ATR\_SRP) 134, and n video title set attributes (VTS\_ATR) 135, which are arranged in that order. The video title set attribute table information (VTS\_ATRTI) 133 contains information on the table 111. In the video title set attribute search pointers (VTS\_ATR\_SRP) 134, description is made in the order corresponding to the title sets #1 to #n. Similarly, description is made of the pointers for searching for the video title set attributes (VTS\_ATR) 135 written in the order corresponding to the title sets #1 to #n. Described in each of the video title set attributes (VTS\_ATR) 135 is the attribute of the corresponding title set (VTS).

More specifically, the video title set attribute information (VTS\_ATRTI) 133 contains a parameter (VTS\_Ns) for the number of video titles and a parameter (VTS\_ATRT\_EA) for the end address of the video title

set attribute table (VTS\_ART) 135 as shown in FIG. 19. As shown in FIG. 20, in each video title set attribute search pointer (VTS\_ATR\_SRP) 134 there is described a parameter (VTS\_ATR\_SA) for the start address of the corresponding video title set attribute (VTS\_ATR) 135. As shown in FIG. 21, the video title set attribute (VTS\_ATR) 135 contains a parameter (VTS\_ATR\_EA) for the end address of the video title set attribute (VTS\_ATR) 135, a parameter (VTS\_CAT) for the category of the corresponding video title set, and a parameter (VTS\_ATTRI) for attribute information on the corresponding video title set. Because the attribute information on the video title set contains the same contents of the attribute information on the video title set described in the video title set information management table (VTS\_MAT).

The structure of the logic format of the video title set (VTS) 102 shown in FIG. 5 will be explained with reference to FIG. 22. In each video title set (VTS) 102, four items 140, 141, 142 and 143 are described in the order shown in FIG. 22. Each video title set (VTS) 102 is made up of one or more video titles having common attributes. The video title set information (VTSI) contains the management information on the video titles 102, including information on playback of the video object set 142, information on playback of the title set menu (VTSM), and attribute information on the video object sets 102.

Each video title set (VTS) 102 includes the backup 143 of the video title set information (VTSI) 140. Between the video title set information (VTSI) 140 and the backup (VTSI\_BUP) 143 of the information, a video object set (VTSM\_VOBS) 141 for video title set menus and a video object set (VTSTT\_VOBS) 142 for video title set titles are arranged. Both video object sets (VTSM\_VOBS and VTSTT\_VOBS) 141 and 142 have the structure shown in FIG. 6, as explained earlier.

The video title set information (VTSI) 140, the backup (VTSI\_BUP) 143 of the information, and the video object set (VTSTT\_VOBS) 142 for video title set titles are items indispensable to the video title sets 102. The video object set (VTSM\_VOBS) 141 for video title set menus is an option provided as the need arises.

The video title set information (VTSI) 140 consists of seven tables 144, 145, 146, 147, 148, 149 and 150 as shown in FIG. 22. These seven tables 144, 145, 146, 147, 148, 149 and 150 are forced to align with the boundaries between logical sectors.

The video title set information management table (VTSI\_MAT) 144, i.e., the first table, is a mandatory table. Described in the table 108 are the size of the video title set (VTS) 102, the start address of each piece of information in the video title set (VTS) 102, and the attributes of the video object sets (VOBS) 82 in the video title set (VTS) 102.

The video title set part-of-title search pointer table (VTS\_PTT\_SRPT) 145, which is the second table, is mandatory table. It is in this table that the selectable video titles, that is, program chain (PGC) or programs

(PG) contained in the selectable video title set 102 are described in accordance with the number that the user has entered from the key/display section 4. Entering the desired one of the entry numbers listed in the pamphlet coming with the optical disk 10 from the key/display section 4, the user can watch the video, starting with the section in the story corresponding to the entered number.

The video title set program chain information table (VTS\_PGCIT) 146, which is the third table, is a mandatory table. Described in this table 146 is the VTS program chain information (VTS\_PGCI) or information on VTS program chains.

The video title set menu PGCI unit table (VTSM\_PGCI\_UT) 147, which is the fourth table, is a mandatory item when the video object set (VTSM\_VOBS) 141 for video title set menus is provided. Described in the table 147 are information on program chains for reproducing the video title set menu (VTSM) provided for each language. By referring to the video title set menu PGCI unit table (VTSM\_PGCI\_UT) 147, a program chain for the specified language in the video object set (VTSM\_VOBS) 141 can be acquired and reproduced as a menu.

The video title set time search map table (VTS\_MAPT) 148, which is the fifth table, is an optional table provided as the need arises. Described in the table 148 is information on the recording location of the video data in each program chain (PGC) in the title set 102 to which the map table (VTS\_MAPT) belongs, for a specific period of time of display.

The video title set cell address table (VTS\_C\_ADT) 149, which is the sixth table, is a mandatory item. Described in the table 149 are the addresses of each cell 84 constituting all the video objects 83 or the addresses of cell pieces constituting cells in the order the identification numbers of the video objects 83 are arranged. Here, a cell piece is a piece constituting a cell. Cells undergo an interleaving process in cell pieces and are arranged in a video object 83.

The video object title set video object unit address map (VTS\_VOBU\_ADMAP) 150, which is the seventh table, is a mandatory item. Described in the table 150 are the start addresses of all the video object units 85 in the video title set are described in the order of arrangement.

The video title information management table (VTSI\_MAT) 144, video title set part-of-title search pointer table (VTS\_PTT\_SRPT) 145, video title set program chain information table (VTS\_PGCIT) 146 and video title set menu PGCI unit table (VTSM\_PGCI\_UT) 147, all shown in FIG. 22, will be described with reference to FIG. 23 to 44.

FIG. 23 shows the contents of the video title information manager table (VTSI\_MAT) 144, in which the video title set identifier (VTS\_ID), end addresses (VTS\_EA, VTSI\_EA) of the video title set 102 and the video title set information, respectively, the version number (VERN) of the DVD video specification, the cat-

egory (VTS\_CAT) of the video title set 102, and the end address (VTSI\_MAT\_EA) of the video title information manager table (VTSI\_MAT) 144 are described in that order.

Furthermore, described in the table (VTSI\_MAT) 144 are the start address (VTSM\_VOBS\_SA) of the video object set (VTSM\_VOBS) 141 for the VTS menu (VTSM) and the start address (VTSTT\_VOB\_SA) of the video object for the title in the video title set (VTS). If the video object set (VTSM\_BOBS) 141 for the VTS menu (VTSM) is absent, "00000000h" will be described in the start address (VTSM\_VOBS\_SA). The end address (VTSI\_MAT\_EA) of VTSI\_MAT is expressed by the number of logical blocks, relative to the first byte in the video title set information management table (VTSI\_MAT) 144. The start address (VTSTM\_VOB\_SA) of VTSM\_VOBS and the start address (VTSTT\_VOB\_SA) of VTSTT\_VOB are expressed by logical blocks (RLBN) relative to the head logical block in the video title set (VTS) 102.

In the table (VTSI\_MAT) 144, the start address (VTS\_PTT\_SRPT\_SA) of the video title set information part-of-title search pointer table (VTS\_PTT\_SRPT) 145 is represented by the number of blocks, relative to the head logical block in the video title set information (VTSI) 140. Furthermore, in the table (VTSI\_MAT) 144, the start address (VTS\_PGCIT\_SA) of the video title set program chain information table (VTS\_PGCIT) 146 and the start address (VTS\_PGCI\_UT\_SA) of the PGCI unit table (VTS\_PGCI\_UT) 147 of video title set menus represented by the number of blocks, relative to the head logical block in the video title set information (VTSI) 140, and the start address (VTS\_MAPT\_SA) of the time search map table (VTS\_MAPT) 148 in the video title set (VTS) is described in logical sectors which follows the first logical sector in the video title set (VTS) 102. Similarly, the VTS address table (VTS\_C\_ADT) 149 and the address map (VTS\_VOBU\_ADMAP) 150 for VTS\_VOBU are described in logical sectors which follows the head logical sector in the video title set (VTS) 102.

Described in the table (VTSI\_MAT) 144 are the video attribute (VTSM\_V\_ATR) of the video object set (VTSM\_VOBS) 141 for the video title set menu (VTSM) in the video title set (VTS) 102, the number of audio streams (VTSM\_AST\_Ns), the attributes (VTSM\_AST\_ATR) of the audio streams, the number of sub-picture streams (VTSM\_SPST\_Ns), and the attributes (VTSM\_SPST\_ATR) of the sub-picture streams. Similarly, further described in the table (VTSI\_MAT) 144 are the video attribute (VTS\_V\_ATR) of the video object set (VTSM\_VOBS) 142 for the video title set (VTSTT) for the video title set (VTS) in the video title set (VTS) 102, the number of audio streams (VTS\_AST\_Ns), the attributes (VTS\_AST\_ATR) of the audio streams, the number of sub-picture streams (VTS\_SPST\_Ns), and the attributes (VTS\_SPST\_ATR) of the sub-picture streams. Also described in this table (VTSI\_MAT) 144 are the attribute (VTS\_MU\_AST\_ATR)

of the multi-channel audio stream in the video title set (VTS).

At most eight audio streams are provided, and at most 32 sub-picture streams are provided. Attribute is described in each of these streams. In the sub-picture stream attribute (VTS\_SPST\_ATR) it is described whether the sub-picture is a language or not.

The video title set part-of-title search pointer table (VTS\_PTT\_SRPT) 145 shown in FIG. 22 has the structure shown in FIG. 24. As seen from FIG. 24, the table 145 has three items. Described in the first item is part-of-title search pointer table information (PTT\_SRPTI) 161. Described in the second item are n search pointers (TTU\_SRP#n) 162 for title units #n. Described in the third item are m part-of-title search pointers (PTT\_SRP#m) 163 for m input numbers #m, for every title unit #n (TTU#n) 164. In the part-of-title search pointer table information (PTT\_SRPTI) 161, there are described the number (VTS\_TTU\_Ns) of title search pointers in the video title set (VTS) and the end address (VTS\_PTT\_SRPT\_EA) of the table (VTS\_PTT\_SRPT) 145, as is illustrated in FIG. 25. The maximum number of title search pointers which can be described is 99. The end address (VTS\_PTT\_SRPT\_EA) is described as the number of relative logical blocks, relative to the head byte of the table VTS\_PTT\_SRPT. Described in the title unit #n search pointer (TTU\_SRP#n) 162 is a start address (TTU\_SA) of the title unit (TTU) which is collection of the title search pointer #m (PTT\_SRP#m), as shown in FIG. 26. The start address (TTU\_SA), which corresponds to the start address of the first title search pointer #1 table (PTT\_SRPT) 163, is also described as the number of relative logical blocks, relative to the head byte of the VTS\_PTT\_SRPT. Described in the title search pointer (PTT\_SRP#m) 163 are the program chain number (PGC\_N) and program number PG\_N which are designated by the title search pointer #m (PTT\_SRP#m), as is illustrated in FIG. 27.

The VTS program chain information table (VTS\_PGCIT) 146 of FIG. 22 has a structure as shown in FIG. 28. In the information table (VTS\_PGCIT) 146 there is described information on the VTS program chains (VTS\_PGC). The first item of this information is information (VTS\_PGCIT\_I) 172 on the information table (VTS\_PGCIT) 146 of VTS program chains (VTS\_PGC). In the information table (VTS\_PGCIT) 146, the information (VTS\_PGCIT\_I) 172 is followed by as many VTS\_PGCI search pointers (VTS\_PGCIT\_SRP) used to search for VTS program chains (VTS\_PGC) as the number (from #1 to #n) of VTS program chains in the information table (VTS\_PGCIT) 146. At the end of the table, there are provided as many pieces of information (VTS\_PGCI) 174 on the respective VTS program chains (VTS\_PGC) as the number (from #1 to #n) of VTS program chains (VTS\_PGC).

The information (VTS\_PGCIT\_I) 172 in the VTS program chain information table (VTS\_PGCIT) 146, as shown in FIG. 29, contains the number (VTS\_PGC\_Ns)

of VTS program chains (VTS\_PGC) and the end address (VTS\_PGCIT\_EA) of the table information (VTS\_PGCIT\_I) 172 expressed by the number of bytes, relative to the first byte of the information table (VTS\_PGCIT) 146.

Furthermore, as shown in FIG. 30, the VTS\_PGCIT search pointer (VTS\_PGCIT\_SRP) 103 contains the attributes (VTS\_PGC\_CAT) of the program chains (VTS\_PGC) in the video title set (VTS) 172 and the start address (VTS\_PGC\_I\_SA) of the VTS\_PGC information (VTS\_PGC\_I) expressed by the number of bytes, relative to the first byte of the VTS\_PGC information table (VTS\_PGCIT) 146. Here, the VTS\_PGC attribute (VTS\_PGC\_CAT) contains, for example, an attribute indicating whether an entry program chain (Entry PGC) is the first one to be reproduced. Usually, an entry program chain (PGC) is described before program chains (PGC) that are not entry program chains (PGC).

As shown in FIG. 31, five items are described in the PGC information (VTS\_PGC\_I) 174 for one PGC. The first item is a program chain general information (PGC\_GI) 175. The second item is a program chain navigation command Table (PGC-CMDT) 176. The third, fourth and fifth mandatory items 178, 178 and 179 are described if a video object exists following to navigation command table (PGC\_NV\_CMDT). The third item is a program chain program map (PGC\_PGMAP) 177, the fourth item is a cell playback information table (C\_PBIT) 178, and the fifth item is a cell position information table (C\_POSIT) 179.

As shown in FIG. 32, the contents (PGC\_CNT) of the program chain (PGC), and a PGC playback time (PGC\_PB\_TM) are described in the program chain general information (PGC\_GI) 175.

The contents (PGC\_CNT) of PGC contain the description of the program chain structure, that is, the number of programs, the number of cells, etc. The playback time (PGC\_PB\_TIME) of PGC contains the total playback time of the programs in the PGC. The playback time is the time required to continuously playback the programs in the PGC, regardless of the playback procedure.

Further described in the program chain general information (PGC\_GI) 175 are, as shown in FIG. 32, PGC user operation control (PGC\_UOP\_CTL), PGC sub-picture stream control (PGC\_SPST\_CTL), PGC audio stream control (PGC\_AST\_CTL), and PGC navigation control (PGC\_NV\_CTL). In the PGC user operation control (PGC\_UOP\_CTL), there is described a user operation which is prohibited during the reproduction of the PGC. Using the described contents of PGC navigation controls, PCGs are played back successively. This user operation is calling of a menu, changing of a sub-picture or an audio stream, or the like. Described in the PGC sub-picture stream number which can be used in the PGC, and similarly, described in the PGC audio stream control (PGC\_AST\_CTL) is audio stream number which can be used in the PGC.

Further described in the program chain general

information (PGC\_GI) 175 are PGC sub-picture palette (PGC\_SP\_PLT), the start address (PGC\_NV\_CMDT\_SA) of PGC navigation command table (PGC\_NV\_CMDT) 176, the start address (PGC\_PGMAP\_SA) of PGC program map (PGC\_PGMAP) 177, the start address (C\_PBIT\_SA) of the cell information table (C\_PBIT) 178, and the start address (C\_POSIT\_SA) of cell position information table (C\_POSIT) 179. Described in the PGC sub-picture palette (PGC\_SP\_PLT) are 16 color palettes for all sub-pictures of the PGC. The start addresses of the PGC\_NV command table (PGC\_NV\_CMDT) 176, PGC program map (PGC\_PGMAP) 177 and cell position information table (C\_POSIT) 179 are described in the form of the numbers of logical blocks, relative to the head byte of the PGC. If neither the cell playback information table (C\_PBIT) 178 nor the cell position information table (C\_POSIT) 179 exists, zeroes (0s) will be described in their start addresses.

The program chain program map (PGC\_PGMAP) 177 of the PGC information (VTS\_PGC\_I) 174 shown in FIG. 31 is a map representing the structure of the program in the PGC, as can be understood from FIG. 33. Described in the map (PGC\_PGMAP) 177 are the entry cell numbers (ECELLN), the start cell numbers of the individual programs, in ascending order as shown in FIG. 34. In addition, program numbers are allocated, starting at 1, in the order in which the entry cell numbers are described. Consequently, the first entry number in the map (PGC\_PGMAP) 177 must be #1.

The cell playback information table (C\_PBIT) 178 defines the order in which the cells in the PGC are played back. In the cell playback information table (C\_PBIT) 178 there are described pieces of the cell playback information (C\_PBIT) consecutively as shown in FIG. 35. Basically, cells are played back in the order of cell number. The cell playback information (C\_PBIT) contains a cell category (C\_CAT) as playback information (P\_PBI) as shown in FIG. 36. Written in the cell category (C\_CAT) are a cell block mode indicating whether the cell is one in the block and if it is, whether the cell is the first one, a cell block type indicating whether the cell is not part of the block or is one in an angle block, an STC discontinuity flag indicating whether the system time clock (STC) must be set again, a cell playback mode, a cell navigation control and an inter-cell command number. Here, a cell block is defined as a set of cells with a specific angle. The change of the angle is realized by changing the cell block. Taking baseball for example, the changing from an angle block of shooting scenes from the infield to an angle block of shooting scenes from the outfield corresponds to the change of the angle.

As shown in FIG. 36, the playback information (P\_PBI) of the cell playback information table (C\_PBIT) 178 contains the cell playback time (C\_PBTM) representing the total playback time of the PGC. When the PGC has an angle cell block, the playback time of the angle cell number 1 represents the playback time of the

angle block. Also described in the cell playback information table (C\_PBIT) 178 are the start address (C\_FVOBU\_SA) of the first video object unit (VOBU) 85 in the cell expressed by the number of logical blocks, relative to the first logical block in the video object unit (VOBU) 85 in which the cell is recorded and the start address (C\_LVOBU\_SA) and end address (C\_LVOBU\_EA) of the end video object unit (VOBU) 85 in the cell expressed by the number of logical blocks, relative to the first logical block in the video object unit (VOBU) 85 in which the cell is recorded.

The cell position information table (C\_POSI) 179 specifies the identification numbers (VOB\_ID) of the video objects (VOB) in the cell used in the PGC and the cell identification number (C\_ID). In the cell position information table (C\_POSI), pieces of cell position information (C\_POSI) corresponding to the cell numbers written in the cell playback information table (C\_PBIT) 178 as shown in FIG. 37 are described in the same order as in the cell playback information table (C\_PBIT). The cell position information (C\_POSI) contains the identification numbers (C\_VOB\_IDN) of the video object units (VOBU) 85 in the cell and the cell identification number (C\_IDN) as shown in FIG. 38.

Further, the structure of the video title set PGCI unit table (VTSM\_PGCI\_UT) 147 shown in FIG. 22 will be explained with reference to FIGS. 37 to 44. The video title set PGCI unit table (VTSM\_PGCI\_UT) 147 has substantially the same structure as the VMGM\_PGCI unit table 110 shown in FIG. 12. That is, in the VMGM\_PGCI unit table (VTSM\_PGCI\_UT) 147, VTS menu PGCI unit table information (VTSM\_PGCI\_UTI) 180 is first described as shown in FIG. 39, then VTS menu language unit search pointers (VMGM\_LU\_SRP) 181 of a necessary number  $n$  corresponding to the number  $n$  of languages are successively described, and the VTS menu language unit (VTSM\_LU) 182 searched for by the search pointer is described.

In the VTS menu PGCI unit table information (VTSM\_PGCI\_UTI) 180, the number (VTSM\_LU\_Ns) of VTSM language units (VTSM\_LU) and the end address (VTSM\_PGCI\_UT\_EA) of the VTSM\_PGCI unit table (VMGM\_PGCI\_UT) 147 are described as shown in FIG. 40. In each of  $n$  video manager menu language unit search pointers (VTSM\_LU\_SRP) 181 prepared for respective languages, the language code (VTSM\_LCD) of the VTS menu and the start address (VTSM\_LU\_SA) of the VTS menu (VTSM) language unit (VTSM\_LU) 182 are described as shown in FIG. 41. The end address (VTSM\_PGCI\_UT\_EA) of VTSM\_PGCI\_UT 110 and the start address (VTSM\_LU\_SA) of VTSM\_LU 352 are described by use of the logical block number from the first block of the VTSM\_PGCI unit table (VTSM\_PGCI\_UT) 147.

In each of  $n$  VTSM language units (VTSM\_LU) 182 prepared for respective languages, VTSM menu language unit information (VTSM\_LUI) 183 and VTSM\_PGCI search pointers (VTSM\_PGCI\_SRP) 184 of a number corresponding to the number of menu pro-

gram chains are provided as shown in FIG. 42, and VTSM\_PGC information items (VTSM\_PGCI) 185 searched for by the search pointers and corresponding in number to the menu program chains are provided as shown in FIG. 42.

In each language unit information (VTSM\_LUI) 183, the number (VMGM\_PGCI\_Ns) of VMGM\_PGCI and the end address (VTSM\_LUI\_EA) of the language unit information (VTSM\_LUI) are described as shown in FIG. 43. Further, in the VTSM\_PGCI search pointer (VTSM\_PGCI\_SRP), the VTSM\_PGC category (VTSM\_PGC\_CAT) and the start address (VTSM\_PGCI\_SA) of VTSM\_PGCI are described as shown in FIG. 44. The end address (VTSM\_LUI\_EA) of VTSM\_LUI and the start address (VTSM\_PGCI\_SA) of VTSM\_PGCI are described by the number of logical blocks, relative to the head byte of VTSM\_LU. As the VTSM\_PGC category (VTSM\_PGC\_CAT), information indicating that the program chain is an entry program chain or title menu is described.

As explained with reference to FIG. 6, a cell 84 is a set of video object units (VOBU) 85. A video object unit (VOBU) 85 is defined as a pack train starting with a navigation (NV) pack 86. Therefore, the start address (C\_FVOBU\_SA) of the first video object unit (VOBU) 85 in a cell 84 is the start address of the NV pack 86. As shown in FIG. 45, the NV pack consists of a pack header 310, a system header 311, and two packets of navigation data-- a presentation control information (PCI) packet 316 and a data search information (DSI) packet 317. As many bytes as shown in FIG. 45 are allocated to the respective sections so that one pack may contain 2048 bytes corresponding to one logical sector. The NV pack is placed immediately in front of the video pack containing the first data item in the group of pictures (GOP). Even when the object unit 85 contains no video pack, an NV pack is placed at the head of the object unit containing audio packs or/and sub-picture packs. As with an object unit containing object units, even with an object unit containing no video pack, the playback time of the object unit is determined on the basis of the unit in which video is reproduced.

Here, GOP is determined in the MPEG standard and is defined as a data train constituting a plurality of screens as explained earlier. Specifically, GOP corresponds to compressed data. Expanding the compressed data enables the reproduction of a plurality of frames of image data to reproduce moving pictures. The pack header 310 and system header 311 are defined in the MPEG 2 system layer. The pack header 310 contains a pack start code, a system clock reference (SCR), and a multiplex rate. The system header 311 contains a bit rate and a stream ID. The packet header 312, 314 of each of the PCI packet 316 and DSI packet 317 contains a packet start code, a packet length, and a stream ID as determined in the MPEG2 system layer.

As shown in FIG. 46, another video, audio, or sub-picture pack 88, 89, 80 and 291 consists of a pack header 320, packet header 321, and a packet 322 con-

taining the corresponding data as determined in the MPEG2 system layer. Its pack length is determined to be 2048 bytes. Each of these packs is aligned with the boundaries between logical blocks.

The PCI data (PCI) 313 in the PCI packet 316 is navigation data used to make a presentation, or to change the contents of the display, in synchronization with the playback of the video data in the VOB unit (VOBU) 85. Specifically, as shown in FIG. 47, the PCI data (PCI) 313 contains PCI general information (PCI\_GI) as information on the entire PCI and angle information (NSMLS\_ANGLI) as each piece of jump destination angle information in angle change. The PCI general information (PCI\_GI) contains the address (NV\_PCK\_LBN) of the NV pack (NV\_PCK) 86 in which the PCI 113 is recorded as shown in FIG. 48. The address is expressed in the number of blocks, relative to the logical sector of VOB 85 in which the PCI 313 is recorded. The PCI general information (PCI\_GI) contains the category (VOBU\_CAT) of VOB 85, the start playback time (VOBU\_S\_PTM) of VOB, and the end playback time (VOBU\_EPTM) of VOB. Here, the start PTS (VOBU\_SPTS) of VOB 85 indicates the playback start time (start presentation time) of the video data in the VOB 85 containing the PCI 313. The playback start time is the first playback start time in the VOB 85. Normally, the first picture corresponds to I picture (intra-picture) data in the MPEG standard. The end PTS (VOBU\_EPTS) in the VOB 85 indicates the playback end time (end presentation time) of the VOB 85 containing the PCI 313. There is described in the PCI general information (PCI\_GI), end PTM of sequence end in VOB (VOBU\_SE\_E\_PM) and cell elapse time (C\_ELTM).

DSI data (DSI) 315 in the DSI packet 317 shown in FIG. 45 is navigation data used to search for the VOB unit (VOBU) 85. Described in the DSI data (DSI) 315 are DSI general information (DSI\_GI), seamless information (SML\_PBI), angle information (SML\_AGLI), VOB unit search information (VOBU\_SRI), and synchronizing playback information (SYNCl), as shown in FIG. 49.

The DSI information (DSI\_GI) contains information about the entire DSI 315. Specifically, as shown in FIG. 50, the DSI general information (DSI\_GI) contains the system clock reference (NV\_PCK\_SCR) for the NV pack 86. The system clock reference (NV\_PCK\_SCR) is stored in the system time clock (STC) built in each section of FIG. 1. On the basis of the STC, video, audio, and sub-picture packs are decoded at the video, audio, and sub-picture decoders 58, 60, and 62 and the monitor 6 and the speaker 8 reproduce images and sound, respectively. The DSI general information (DSI\_GI) contains the start address (NV\_PCK\_LBN) of the NV pack (NV\_PCK) 86 containing the DSI 315 expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB set (VOBS) 82 containing the DSI 315, and the address (VOBU\_EA) of the last pack in the VOB unit (VOBU) 85 containing the DSI 315

expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU).

Furthermore, the DSI general information (DSI\_GI) contains the end address (VOBU\_IP\_EA) of the V pack (V\_PCK) 88 containing the last address of the first I picture in the VOB expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU) containing the DSI 315, and the identification number (VOBU\_IP\_IDN) of the VOB 83 containing the DSI 315 and the identification number (VOBU\_C\_IDN) of the cell in which the DSI 315 is recorded.

The VOB search information (VOBU\_SRI) of the DSI contains the addresses of a specified number of navigation packs. Video fast-forward etc. are effected, referring to the addresses. The synchronizing information (SYNCl) includes address information on the sub-pictures and audio data reproduced in synchronization with the playback start time of the video data in the VOB unit (VOBU) containing DSI 315. Specifically, as shown in FIG. 51, the start address (A\_SYNCA) of the target audio pack (A\_PCK) 91 is expressed by the number of logical sectors (RLSN), relative to the NV pack (NV\_PCK) 86 in which DSI 315 is recorded. When there are more than one audio stream (8 audio streams, at most), as many pieces of synchronizing information (SYNCl) as audio streams are described. Furthermore, the synchronizing information (SYNCl) includes the address (SP\_SYNCA) of the NV pack (NV\_PCK) 86 of the VOB unit (VOBU) 85 containing the target audio pack (SP\_PCK) 91. The address is expressed by the number of logical sectors (RLSN), relative to the NV pack (NV\_PCK) 66 in which DSI 315 is recorded. When more than one sub-picture stream (32 sub-picture streams, at most) exist, there described as many pieces of synchronizing information (SYNCl) as sub-picture streams.

As described above with reference to FIG. 6, video data is compressed and stored in the video pack 88, while audio data is compressed or not compressed before it is stored in the audio pack 91. Similarly, sub-picture data is usually run-length-compressed and stored in the sub-picture data pack 90. The packs 88, 90 and 91 are, as a pack sequence, sequentially supplied to the video decoder 58, the audio decoder 60 and the sub-picture decoder 62 shown in FIG. 1. The sub-picture pack sequence is decoded by the sub-picture decoder 62 in units of sub-picture unit SPU which is an aggregate of integer number of sub-picture packs. That is, sub-picture data is formed into a unit such that a sub-picture data unit 230 has a structure as shown in FIG. 52. A sub-picture unit header (SPUH) 231 is provided for the leading end of the sub-picture data unit 230. Pixel data (PXD) 232 corresponding to an actual sub-picture image is provided to follow unit data 231. Moreover, a display control sequence table (SP-DCSQT) 233 is provided to follow pixel data 232. The sub-picture data units 232 are run-length-compressed or not compressed before they are stored in integer number of



sub-picture packs #i to #j90, as shown in FIG. 52. Although each of the sub-picture packs #i to #j90 has a length of 2048 bytes as shown in FIG. 52, the sub-picture pack #j90 is adjusted to have 2048 bytes if the length of the sub-picture pack #j90 forming the trailing end of the sub-picture data unit 230 is shorter than 2048 bytes. The length of the pack is adjusted such that a stuffing byte is inserted into the packet header 321 if the number of data items to be adjusted is 1 to 7 bytes and a padding packet is added to the sub-picture data packet 322 if the number of data items is 8 bytes or larger.

The sub-picture unit header (SPUH) 230 shown in FIG. 53 has the size (SPDSZ) of the sub-picture unit and start address (SPDCSQT) of the display control sequence table (SP\_DCSQT) described therein, as shown in FIG. 54. As shown in FIG. 53, the display control sequence table (SP\_DCSQT) includes 0-th to n-th display control sequences (SP\_DCSQ) 234. Each display control sequence (SP\_DCSQ) 234 has contents relating to display control of pixel data. That is, as shown in FIG. 55, the display control sequence (SP\_DCSQ) 234 has start time (SP\_DCSQ\_STM) of the display control sequence (SP\_DCSQ) 234, address (SP\_NXT\_DCSQ\_SA) of the next display control sequence (SP\_DCSQ) 234 and display sequence command (SP\_DCCMDn) described therein.

Execution start time of SP\_DCSQ is, in the start time (SP\_DCSQ\_STM) of SP\_DCSQ, described as relative display time (PTM) from presentation time stamp (PTS) described in the sub-picture pack. Zero is described in the start time (SP\_DCSQ\_STM) of first SP\_DCSQ. Next start address continued from the leading byte of the sub-picture unit as the number of relative bytes is described in the address (SP\_NXT\_DCSQ\_SA) of SP\_DCSQ.

The display sequence command (SP\_DCCMD), as shown in FIG. 56, has nine commands. That is, a first command is a command (FSTA\_DSP) for setting the start timing of forcible display of pixel data regardless of whether the sub-picture is displayed or not displayed. A second command is a command (STA\_DSP) for starting display of the updated sub-picture unit. A third command is a command (STP\_DSP) for stopping display of the sub-picture unit. The sub-picture is again displayed when command STA\_DSP is again executed even if STP\_DSP is executed and thus it is stopped. A fourth command is a command (SET\_COLOR) for setting the color of each pixel of pixel data. The command (SET\_COLOR) contains the code of a color pallet. A fifth command is a command (SET\_CONTR) for setting the mixture ratio of the main image and pixel data. The command (SET-CONTR) has the contrast of each pixel described therein. If the command (SET-CONTR) is not included in the display control sequence (SP\_DCSQ) of the sub-picture unit, the mixture ratio set for the previous sub-picture unit is maintained. A sixth command is a command (SET\_DAREA) for setting the display region for pixel data. A seventh command is command

(SET\_DSPXA) for setting the address of pixel data for use in the display. The address is described as the number of relative bytes from the leading byte of the sub-picture unit. An eighth command is a command (CHG\_COLCON) for setting change of the color and contrast of pixel data. A ninth command (CMD\_END) is a command for completing display control command.

The sub-picture decoder 62 shown in FIG. 1 includes a circuit shown in FIG. 57 for processing the sub-picture data unit 230. That is, the sub-picture decoder 62 has a syntax decoder 241 to which sub-picture data packets 322, from which a pack header 320 and a packet header 321 are removed from each sub-picture pack 90 in the previous circuit, are sequentially supplied. The syntax decoder 241 is controlled with STC (system time clock) 248 set by a system CPU 50 and a stream selection register 242. That is, a reference is made to SCR to be described in the pack header 320 by the system CPU 50 so that the STC (system time clock) 248 is set. Moreover, ID of the sub-picture stream is set to the stream selection register 242. Therefore, if PTS (presentation time stamp) described in the sub-picture data packet 322 coincides with the time of the STC 248, only the sub-picture packet 322 forming the sub-picture stream corresponding to the set ID is selected to be output to a FIFO 243 so as to be processed in the following circuit. That is, the sub-picture packet 322 output from the FIFO 243 is suspended from the run-length compression by the run-length decoder 244, namely, expanded so as to be output to a sequence controller 245. In the sequence controller 245, the unit header 231 of the sub-picture data unit 230 is acquired so that the display control sequence table (SP\_DCSQT) 233 is acquired. In accordance with the display control sequence (DCSQ) 234 described in the table 233, the command is decoded and the command is supplied to an output controller 247 in the display controller 246. Expanded pixel data 232 (PXD) is supplied from the sequence controller 245, the pixel data 232 (PXD) being used such that a sub-picture signal is supplied from the display controller 246 to a video mixer (not shown) in accordance with an output control state set to an output controller 247 by the system CPU 50 or an output control state set with a command supplied from the sequence controller 245 to the output controller 247. The video mixer is supplied with a video signal obtained by decoding the video pack 88 from the video decoder 58. The sub-picture signal is mixed with the foregoing video signal so as to be supplied to a monitor 6.

Hereinafter, the operation of reproducing the movie data from the optical disk 10 with the logic format shown in FIGS. 4 to 56 will be explained with reference to FIG. 1. In FIG. 1, the solid-line arrows indicate data buses and the broken-line arrows represent control buses.

To begin with, the operation of acquiring the video title set (VTS) 102 by the use of the video manager (VMG) 101 will be explained by reference to FIG. 58. With the optical disk apparatus of FIG. 1, when the power supply is turned on and an optical disk 10 is



loaded, the system CPU section 50 reads the initial operation program from the system ROM/RAM section 52 and operates the disk drive section 30, which then starts a search operation as shown in step S41. Namely, the disk drive section 30 starts to read the data from the lead-in area 27 and then from the adjoining volume and file structure area 100, in which a volume structure and a file structure are determined in accordance with ISO-9660. Specifically, to read the data from the volume and file structure area 100 located in a specific position on the optical disk 10 set in the disk drive section 30, the system CPU section 50 gives a read instruction to the disk drive section 30 to read the contents of the volume and file structure area 100, and stores the data temporarily in the data RAM section 56 via the system processor section 54. The system CPU section 50 extracts information about the recording position and recording size of each file and management information necessary for other managing actions via the path table and directory record stored in the data RAM section 56, and transfers and stores these pieces of information in specific locations in the system ROM/RAM section 52.

Then, as shown in step S42, the system CPU section 50 acquires a video manager (VMG) 101 composed of files, starting with file number 0, by reference to the information about the recording position and recording capacity of each file in the system ROM/RAM section 52. Specifically, referring to the recording position and recording capacity of each file acquired from the system ROM/RAM section 52, the system CPU section 50 gives a read instruction to the disk drive section 30, acquires the positions and sizes of a plurality of files constituting the video manager 101 existing on the root directory, reads the video manager (VMG) 101, and stores it in the data RAM section 56 via the system processor section 54. Thereafter, the system CPU section 50 in the video manager (VMG) 101 stored in the data RAM section 56, as shown in step S43, acquires the start addresses of the individual tables (TT\_SRPT, VMGM\_PGCI\_UT, VTS\_ART) written in the video management information table (VMGI\_MAT) 108, thereby enabling the acquisition of each table. Here, when the user looks at a title brochure in which titles have been written, gets a number specifying a video title set, and enters the number directly from the key/display section 4 as shown in step S44, control will be passed to step S48. When there is no input entered by the user from the key/display section 4, it will be confirmed as shown in step S45 whether or not a VMGM video object set (VMGM\_VOBS) 106 is present as menu data in the video management information table (VMGI\_MAT) 108. If there is no VMGM video object set (VMGM\_VOBS) 106, the user may enter a video title set or a predetermined video title set may be selected, and control will be passed to step S48. If a VMGM video object set (VMGM\_VOBS) 106 is present, the video attribute information (VMGM\_V\_ATTR) on VMGM and the attribute information (VMGM\_AST\_ATTR, VMGM\_SPST\_ATTR)

on audio and sub-picture streams will be acquired from the video management information table (VMGI\_MAT) 108. Thereafter, as shown in step S47, a menu will be displayed as shown in step S47, which will be explained in detail later by reference to FIG. 59. According to the menu representation, the user selects the video title set (VTS) 102 from the key/display section 4. Once the video title set (VTS) 102 has been selected, the video title set number (VTSN) corresponding to the selected video title set, title number (VTS\_TTN), and the start address (VTS\_SA) of the video title set are acquired from the title search pointer table (TT\_SRPT) 109 in the video manager (VMG) 101. Furthermore, the system CPU 50 obtains attribute information (VTS\_V\_ATTR, VTS\_AST\_ATTR, VTS\_SPST) of the acquired video title set number (VTSN) from the video title set attribute table (VTS\_ATTRT) 111. On the basis of these pieces of attribute information (VTS\_V\_ATTR, VTS\_AST\_ATTR, VTS\_SPST), the parameters necessary for playback of the video manager menu are set in the video decoder section 58, audio decoder section 60, and sub-picture decoder section 62, respectively. Furthermore, according to the pieces of attribute information, the video processing section 201, audio processing section 202, audio mixing section 203, and sub-picture processing section 207 in the D/A and data-reproducing section 64 are set. By the above series of procedures, the preparation to acquire the video title set 106 has been completed as shown in step S50.

Now, the operation going on as far as the video manager menu for choosing a video title is displayed will be described by reference to FIG. 59. When the menu search process is started as shown in step S10, the volume manager information management table (VMGI\_MAT) 108, the first table in the video manager 101, will be searched. By the searching operation, the start address (VMGM\_PGCI\_UT\_SR) of the VMGM\_PGCI unit table (VMGM\_PGCI\_UT) 110 for the video manager menu (VMGM) is acquired. Then, the VMGM\_PGCI unit table 110 is acquired. From the table information (VMGM\_PGCI\_UTI) in the table (VMGM\_PGCI\_UT) 110, the number (a) of language units (VMGM\_LU\_Ns) on the video manager menu is acquired. Then, as shown in step S11, the acquisition of the search pointer (VMGM\_LU\_SRP) of the first #1 ( $n = 1$ ) VMGM\_LU is determined. The search pointer (VMGM\_LU\_SRP) of the VMGM\_LU is acquired as shown in step S12. Then, as shown in step S13, it is determined whether the language code (= b) (VMGM\_LCD) written in the search pointer (VMGM\_LU\_SRP) of VMGM\_LU coincides with the language code (= B) specified in the reproducing apparatus, or the default language code. If the language codes do not coincide with each other, the number of the search pointer will be incremented ( $n = n + 1$ ) as shown in step S14 and it will be determined whether the incremented number  $n$  has exceeded the number (a) of language units (VMGM\_LU\_Ns) in the video manager menu. If the number  $n$  has been set equal to or larger

than the number (a) of language units (VMGM\_LU\_Ns) in the video manager menu, the searching operation for the video manager menu (VMGM) will be terminated as shown in step S16. If the number n is smaller than the number (a) of language units (VMGM\_LU\_Ns) in the video manager menu, control will be returned to step S13, where the n-th search pointer (VMGM\_LU\_SRP) of VMGM\_LU will be acquired and step S13 to step S15 will be executed again.

If in step S13, the language code (= b) (VMGM\_LCD) written in the search pointer (VMGM\_LU\_SRP) of VMGM\_LU coincides with the language code (= B) specified in the reproducing apparatus, or the default language code, the VMGM language unit (VMGM\_LU) 127 corresponding to the language code written in the search pointer (VMGM\_LU\_SRP) of VMGM\_LU will be acquired as shown in step S17. The number (VMGM\_PGCi\_Ns) of VMGM\_PGCi is extracted from the VMGM language unit information (VMGM\_LUI). Next, as shown in step S18, the VMGM\_PGC category (VMGM\_PGC\_CAT) is acquired from the VMGM\_PGCi search pointer (VMGM\_PGCi\_SRP) 131. Thus, the VMGM\_PGC number corresponding to the menu ID (= "0010") as well as to the entry type (= 1) is acquired from the VMGM\_PGC category (VMGM\_PGC\_CAT). Here, the menu ID (= "0010") corresponds to the VMGM title menu. The start address (VMGM\_PGC\_SA) of the VMGM\_PGC corresponding to the acquired VMGM\_PGC number is obtained from the VMGM\_PGCi search pointer (VMGM\_PGCi\_SRP) and as shown in step S19, the relevant PGC is acquired from the VMGM video object set (VMGM\_VOBS) 106, thereby reproducing the PGC.

As a result, the VMG menu is displayed. For example, titles of movie series appear. When the first title set is chosen, the title set corresponding to the first one is acquired as follows.

The start address (VTS\_SA) of the video title set 102 is acquired from the title search pointer 121 having the entry number #1 shown in FIG. 8. Then, the video title set information (VTSi) 140 on the title set shown in FIG. 22 is obtained. From the management table (VTSi\_MAT) 144 of the video title set information (VTSi) 140, the end address (VTSi\_MAT\_EA) of the video title set information management table (VTSi\_MAT) 144 shown in FIG. 23 is acquired. Furthermore, on the basis of the number of audio streams and the number of sub-picture streams (VTS\_AST\_Ns, VTS\_SPST\_Ns) and the attribute information (VTS\_V\_ATR, VTS\_A\_ATR, VTS\_SPST\_ATR) on the audio and video data, each section of the reproducing apparatus of FIG. 1 is set. Specifically, according to the attribute information, the audio processing section 202, audio mixing section 203, and sub-picture reproducing section 207 in the D/A and reproducing section 64 are set.

When the video title set menu (VTSM) is present, the video title set menu will be displayed according to the flow shown in FIG. 60. Specifically, when the menu

search process is started as shown in step S20, this enables the start address (VTSM\_PGCi\_UT\_SA) of the VTSM\_PGCi unit table (VTS\_PGCi\_UT) 146 for the video title set menu (VTSM) to be acquired from the video title set information management table (VTSi\_MAT) 144. Then, the VTSM\_PGCi unit table 146 is acquired. From the table information (VTSM\_PGCi\_UTi) 146, the number (a) of language units (VTSM\_LU\_Ns) on the video title menu is acquired. Then, as shown in step S21, the acquisition of the search pointer (VTSM\_LU\_SRP) 181 of the first #1 (n = 1) VTSM\_LU is determined. The search pointer (VTSM\_LU\_SRP) 181 of the VTSM\_LU 182 is acquired as shown in step S22. Then, as shown in step S23, it is determined whether the language code (= b) (VTSM\_LCD) written in the search pointer (VTSM\_LU\_SRP) 181 of VTSM\_LU 182 coincides with the language code (= B) specified in the reproducing apparatus, or the default language code. If the language codes do not coincide with each other, the number of the search pointer will be incremented (n = n + 1) as shown in step S24 and it will be determined whether the incremented number n has exceeded the number (a) of language units (VTSM\_LU\_Ns) in the video title set menu. If the number n has been set equal to or larger than the number (a) of language units (VTSM\_LU\_Ns) in the video title set menu, the searching operation for the video title set menu (VTSM) will be terminated as shown in step S26. If the number n is smaller than the number (a) of language units (VTSM\_LU\_Ns) in the video title set menu, control will be returned to step S22, where the n-th search pointer (VTSM\_LU\_SRP) 181 of VTSM\_LU will be acquired and step S23 to step S25 will be executed again.

If in step S23, the language code (= b) (VTSM\_LCD) written in the search pointer (VTSM\_LU\_SRP) 181 of VTSM\_LU coincides with the language code (= B) specified in the reproducing apparatus, or the default language code, the VTSM language unit (VTSM\_LU) 182 corresponding to the language code written in the search pointer (VTSM\_LU\_SRP) 181 of VTSM\_LU will be acquired as shown in step S27. The number (VTSM\_PGCi\_Ns) of VTSM\_PGCi is extracted from the VTSM language unit information (VTSM\_LUI). Next, as shown in step S28, the VTSM\_PGC category (VTSM\_PGC\_CAT) is acquired from the VTSM\_PGCi search pointer (VTSM\_PGCi\_SRP) 184. Thus, the VTSM\_PGC number corresponding to the menu ID (= "0011" to "0111") as well as to the entry type (= 1) is acquired from the VTSM\_PGC category (VTSM\_PGC\_CAT). Here, the menu ID (= "0011" to "0111") corresponds to the VTSM audio menu for selecting an audio language or VTSM program menu for selecting a program or the other menu. The start address (VTSM\_PGC\_SA) of the VTSM\_PGC corresponding to the acquired VTSM\_PGC number is obtained from the VTSM\_PGCi search pointer (VTSM\_PGCi\_SRP) and as shown in step S29, the relevant PGC is acquired from the VTSM

video object set (VTSM\_VOBS) 141, thereby reproducing the PGC. Thus, the VTS menu is displayed. Once the user has chosen a part of the title from the menu by pressing the corresponding key on the key/display section 4, for example, the language selection menu, a submenu, appears. Specifically, since 32 sub-picture streams have been prepared as sub-pictures as explained earlier, the movie suppliers can display one of, for example, English, Japanese, German, and French sub-pictures. Furthermore, a menu that allows selection of one from eight audio streams can be prepared as another submenu. This makes it possible to choose any one of audio streams associated with dubbing. Selecting a choice from the menu causes the program chain corresponding to the choice to be reproduced.

When the menu (VTSM) for video title sets (VTS) has a simple structure, the start address (VTSM\_VOB\_SA) of the video object set (VTSM\_VOB) 141 for video title set menus may be acquired from the video title set information management table (VTSM\_MAT) 144 of FIG. 34 and the menu for video title sets may be displayed according to the video object set (VTSM\_VOB) 141.

Now, the operation of retrieving and reproducing a program chain after the title has been chosen will be explained by reference to the flows shown in FIG. 61. Specifically, when the user specifies a program chain (PGC) from the key/display section 4, referring to the menu, the desired program chain will be searched for by the following procedure. This procedure applies to not only the retrieval of a program chain for titles in a video title set, but also the retrieval of a program chain for menus, each of which is a relatively complex menu made up of a program chain. As shown in FIG. 61, after a searching operation has been started as shown in step S51, the system CPU section 50 acquires video title set information 140 as shown in step S52 as explained earlier. Then, as shown in step S53, the start address of each table is obtained from the acquired video title set information 140. The table (VTS\_PTT\_SRPT) 145 is acquired according to the start address (VTS\_PTT\_SRPT\_SA) of the video title set part-of-title search pointer table (VTS\_PTT\_SRPT) 145 among these obtained start addresses. Next, as shown in step S54, on the basis of the number (VTSN) of the video title set 296 obtained by reference to the title search pointer (TT\_SRP) 279 of the video manager (VMG) 101 and the VTS title number (VTS\_TTN), the PGC number corresponding to the part of the title specified by the user and the PG number are acquired.

By referring to the VTS-PGCI table (VTS\_PGCI) 146, the VTS\_PGC search pointer #n (VTS\_PGCI\_SRP #n) 303 corresponding to the acquired PGC number is obtained. On the basis of the pointer #n (VTS\_PGCI\_SRP #n) 303, the category (VTS\_PGC\_CAT) of the VTS\_PGC and the start address (VTS\_PGCI\_SA) of the VTS\_PGC information (VTS\_PGCI #n) 304 pointed out by the pointer are

acquired. As shown in step S56, according to the start address (VTS\_PGCI\_SA) of the VTS\_PGC information (VTS\_PGCI #n) 304, the VTS\_PGC information (VTS\_PGCI #n) 304 is acquired. As shown in step S57, on the basis of the PGC general information (PGC\_GI) 175 in the acquired VTS\_PGC information (VTS\_PGCI #n) 304, the contents (PGC\_CNT) of the PGC are acquired. Then, from the PGC\_CNT, the number of programs in the PGC and the number of cells are obtained.

After all of the pre-navigation commands (PRE\_NV\_CMD) have been executed, the PGC program map (PGC\_MAP) 306 and cell playback information (C\_PBIT) are acquired and as shown in step S59, the playback of the specified program (x), or the playback of cells, is started. Once the playback of a program has been completed as a result of cell playback, the program number is updated ( $x = x + 1$ ) as shown in step S60, and it is confirmed as shown in step S61 whether any updated program number is present. Namely, it is verified whether the program reproduced before playback is the last program. If there is a program having the updated program number, control will be passed to step S59, where the updated program will be reproduced. If the reproduced program is the last program, the selection menu for choosing a program to be next reproduced will be displayed as shown in step S62. The menu may have the choices appear in a sub-picture with the cell playback kept in a halt, or with moving pictures appearing on the screen by repeating the cell playback.

When the user has chosen a subsequent PGC from the selection menu, the PGC number at the branch destination chosen by the user is set in the register specified by the set command or the like. At this time, the language previously held in the apparatus, or the player, is referred to and an audio stream and a video stream are set. Once the next PGC number has been determined, it is confirmed whether there is any subsequent PGC number as shown in step S65. If a subsequent PGC is present, control will be passed again to step S55. If there is no PGC number, the playback of PGC will be terminated as shown in step S66.

When display control command (SP\_DCCMD) is described in the display control sequence (DCSQ) described in the display control sequence table (SP\_DCSQT) 233 of the sub-picture data unit 230, a sub-picture is presented forcibly through a process, for example, shown in FIG. 62.

When the sub-picture data unit 230 has started the process in step S71 shown in FIG. 62, a menu for selecting the audio stream and the sub-picture stream is displayed in step S72 as described with reference to FIGS. 59 and 60. If key operation and key input from the display portion 4 to select the audio stream and the sub-picture stream are performed in step S73 in accordance with the foregoing menu, the stream selection register 242 and the output controller 247 of the display controller 246 shown in FIG. 57 are set by the CPU 50. If output of the sub-picture is not selected, the sub-picture stream in the same language as that of the selected

audio stream is set to the stream selection register 242. If the output of the sub-picture is not selected, the output controller 247 is set to be a state where no sub-picture signal is output from the display controller 246, that is, a picture output mute state.

After the stream has been selected, decoding of the stream is started in step S74. That is, sub-picture packs 90 including non-selected streams are sequentially supplied from a data RAM 56 to the sub-picture decoder 62 through the system processor 54. In the sub-picture decoder 62, the sub-picture data packets 322 are cut from the sub-picture pack 90. The cut sub-picture data packets 322 are sequentially supplied to the syntax decoder 241. The syntax decoder 241 makes a reference to the PTS described in the sub-picture data packet 322 with the SCR 248 to output the sub-picture data packet 322 having the stream corresponding to the ID set to the stream selection register 242 to the run-length decoder 244 through the FIFO 243. If a user has not selected display of the sub-picture and as well as if the language of the selected audio stream or the audio stream is not selected, the ID of a sub-picture stream corresponding to the default language for the apparatus is set to the stream selection register 242. The sub-picture data packet 322 supplied to the run-length decoder 244 is expanded in the run-length decoder 244. The expanded sub-picture data unit 230 is supplied to the sequence controller 245. In the sequence controller 245, a reference is made to the start address (SPDC-SQTA) of the display sequence table with the unit header (SPUH) 231 in the sub-picture data unit 230 to acquire the sub-picture display sequence table (SP\_DCSQ). Reproduction control information described in the sequence table (SP\_DCSQ) is supplied to the output controller 247. Moreover, pixel data (PXD) in the sub-picture data unit 230 is supplied to the display controller 246. The display controller 246 controls output of pixel data (PXD) supplied by the output controller 247.

If the user has selected output of the sub-picture in step S76, the display control command SP\_DCCMD is supplied to the output controller 247 at the start time of SP\_DCSQ described in the sub-picture display sequence table (SP\_DCSQ). In accordance with the command (STA\_DSP) for setting the start timing to display pixel data as the display control command SP\_DCCMD, output of pixel data (PXD) to the video mixer is started. Thus, the sub-picture is displayed on the monitor 6 together with the main picture so that usual output of a picture is executed in step S57. As described above, the sub-picture is displayed on the monitor 6 with pixel data (PXD) in the sub-picture data units 230 which have been sequentially supplied. However, if the sub-picture display sequence table (SP\_DCSQ) in the sub-picture data unit 230 includes the command (STP\_DSP) for setting the timing for stopping display of pixel data as the display control command SP\_DCCMD, display of the sub-picture is interrupted. By repeating the foregoing process, the

sub-picture is displayed, if necessary.

If the user has not selected output of the sub-picture in step S76, an instruction to mute the output of the sub-picture is supplied from the system CPU 50 to the output controller 247. Thus, the output controller 247 mutes the output of the sub-picture pixel data in step S81. Therefore, the sub-picture is not displayed in the main picture on the monitor 6. If command (FSTA\_DSP) for forcibly setting the display start timing of pixel data is, in step S78, detected, as the display control command SP\_DCCMD, in the sub-picture display sequence table (SP\_DCSQ) during the mute of the display of the sub-picture, a reference is made to the language of the selected audio stream or the default language in step S79. Thus, output of pixel data (PXD) of the sub-picture stream corresponding to the language to the video mixer is permitted. In step S80 the sub-picture is displayed on the monitor 6. Then, the process is returned to step S76 so that display is continued until the command (STP\_DSP) for setting the timing for stopping the display of pixel data is detected as the display control command SP\_DCCMD. If the command (FSTA\_DSP) is not detected in step S78, the mute state of display of the sub-picture is, as a matter of course, maintained in step S81. In step S82 the operations in steps S76 to S82 are repeated until completion of the sub-picture stream is detected. If completion of the sub-picture stream is detected, the sequential process for the forcible presentation of the picture is completed in step S83.

The forcible presentation shown in FIG. 62 has the structure such that an English sub-picture stream is selected and thus the English sub-picture is displayed if a sub-picture stream corresponding to the audio stream, for example, the English audio stream has been selected. Another structure may be employed in which a sub-picture stream, the presentation of which is forcibly performed, is selected as shown in FIGS. 63A and 63B if a user has selected the sub-picture stream or if a default sub-picture stream has been provided for the apparatus or an optical disk. The forcible picture presentation process according to this embodiment will now be described with reference to FIGS. 63A and 63B.

If the process of the sub-picture data unit 230 has been started in step S91 shown in FIG. 63A, the menu for selecting the audio stream and the sub-picture stream is displayed in step S92 as described with reference to FIGS. 59 and 60. If key operation has been performed or key input for selecting the audio stream has been performed from the display portion 4 in step S93 in accordance with the above-mentioned menu, the system CPU 50 acquires the selected audio stream in step S94 so that the stream selection register in the audio decoder 60 and the output control unit for the display controller similar to those shown in FIG. 57 are set by the system CPU 50. If the audio stream is not selected in step S95, the default audio stream formed in accordance with a language code previously set to the player is acquired by the system CPU 50 in step S95. Thus, the stream selection register and the output control unit

for the display controller are similarly set by the system CPU 50. The default audio stream may previously be provided by a provider for the inside portion of the format of the optical disk. If a key operation has been performed or if key input for selecting the sub-picture stream has been performed from the display portion 4 in accordance with the menu in step S96, the system CPU 50, in step S97, acquires the selected sub-picture stream. Then, the stream selection register 242 and the output control unit 247 for the display controller 246 shown in FIG. 57 are set by the system CPU 50. If the sub-picture stream is not selected in step S95, the default sub-picture stream formed in accordance with the language code and previously provided for the player or the disk is, in step S98, acquired by the system CPU 50. Similarly, the stream selection register 242 and the output control unit 247 of the display controller 246 are set by the system CPU 50. Similarly to the default audio stream, the default sub-picture stream may be provided for the inside portion of the format of the optical disk by the provider.

If the presentation of the sub-picture is not selected, the output control unit 247 is set to be a state where the sub-picture signal is not output from the display controller 246, that is, a state of muting the presentation.

After the selection of the stream has been completed, decoding of the stream is started in step S99. That is, sub-picture packs 90 are sequentially supplied from the data RAM 56 to the sub-picture decoder 62 through the system processor 54. In the sub-picture decoder 62, the sub-picture data packets 322 are obtained from the sub-picture pack 90 by cutting. The sub-picture data packets 322 obtained by cutting are sequentially supplied to the syntax decoder 241. The syntax decoder 241 makes a reference to the PTS described in the sub-picture data packet 322 with the SCR 248 to output the sub-picture data packet 322 having the stream corresponding to the ID of the stream set to the stream selection register 242 to the run-length decoder 244 through the FIFO 243. If the user selects and causes the sub-picture to be displayed in step S100, a usual presentation is performed in step S101.

Also in a case where the user does not select the presentation of the sub-picture and thus the presentation of the sub-picture is not performed, the ID of the selected or default sub-picture stream is set to the stream selection register 242. The sub-picture data packets 322 supplied to the run-length decoder 244 is expanded in the run-length decoder 244. The expanded sub-picture data unit 230 is supplied to the sequence controller 245. In the sequence controller 245, a reference is made to start address (SPDCSQTA) of the display sequence table in accordance with the unit header (SPUH) 231 in the sub-picture data unit 230 so that the sub-picture display sequence table (SP\_DCSQ) is acquired. Reproduction control information described in the sequence table (SP\_DCSQ) is supplied to the output control unit 247. Moreover, pixel data (PXD) in the sub-picture data unit 230 is supplied to the display con-

troller 246. The display controller 246 controls output of pixel data (PXD) supplied by the output control unit 247.

If presentation of the sub-picture has been selected by the user in step S100, display control command (SP\_DCCMD) is supplied to the output control unit 247 at the start time SP\_DCSQ described in the sub-picture display sequence table (SP\_DCSQ). The display control command SP\_DCCMD causes output of pixel data (PXD) to the video mixer to be started in accordance with a command (STA\_DSP) for setting timing at which display of pixel data is started. Thus, the sub-picture is displayed on the monitor 6 together with the main picture. As a result, a usual presentation of the picture is performed in step S101. Pixel data (PXD) in the sub-picture data units 230 which have been sequentially supplied causes the sub-picture to be displayed on the monitor 6. If the sub-picture display sequence table (SP\_DCSQ) in the sub-picture data unit 230 has a command (STP\_DSP) for setting the timing at which display of pixel data is stopped as the display control command SP\_DCCMD, display of the sub-picture is stopped. The foregoing operation is repeated so that the sub-picture is displayed if necessary.

If the user has not selected the presentation of the sub-picture in step S100, an instruction to mute presentation of the sub-picture is supplied from the system CPU 50 to the output control unit 247. The output control unit 247 mutes output of sub-picture pixel data in step S103. As a result, the sub-picture is not displayed in the main picture on the monitor 6. If a command (FSTA\_DSP) for setting the timing at which display of pixel data is forcibly started is, in step S102, detected in the sub-picture display sequence table (SP\_DCSQ) as the display control command SP\_DCCMD during muting of the presentation of the sub-picture, whether or not the sub-picture has been selected is confirmed in step S104. Then, a reference is made to the selected language in step S105 or a reference is made to the default language in step S106 so that output of pixel data (PXD) of the sub-picture stream corresponding to the language to the video mixer is permitted. As a result, the sub-picture is displayed on the monitor 6. After the display has been performed, the operation returns to step S100 so that the display is continued until a command (STP\_DSP) for setting the timing at which display of pixel data is stopped is detected as the display control command (SP\_DCCMD). That is, if the command (FSTA\_DSP) is not detected in step S102, muting of the display of the sub-picture is, as a matter of course, maintained in step S103. The operations from step S100 to step S107 are repeated until completion of the sub-picture stream is detected in step S107. When completion of the sub-picture stream is detected, the sequential process for forcibly performing presentation is completed in step S83.

When the command for performing the forcible presentation shown in FIGS. 63, 64A and 64B is performed, other commands shown in FIG. 56, for example, display timing (STA\_DSP) and display stop timing

(STP\_DSP) are performed so that the sub-picture is forcibly displayed in an adequate display region with proper contrast and hue. That is, the forcible presentation command (FTS\_DSP) is performed together with the other commands shown in FIG. 56.

Referring to FIGS. 64 to 69, explained next will be a method of recording data on the optical disk 10 on and from which the video data is recorded and reproduced in the logic formats shown in FIGS. 4 to 56 and a recording system to which the recording method is applied.

FIG. 64 shows an encoder system that creates a video file 104 of a title set 102 whose video data is encoded. In the system of FIG. 64, for example, a videotape recorder (VTR) 401, an audiotape recorder (ATR) 402, and a sub-picture source 403 are used as sources of the main video data, audio data, and sub-picture data. Under the control of a system controller (Sys con) 405, they create the main video data, audio data, and sub-picture data, which are supplied to a video encoder (VENC) 406, an audio encoder (AENC) 407, and a sub-picture encoder (SPENC) 408, respectively. Under the control of the system controller (Sys con) 405, these encoders 406, 407, and 408 perform A/D conversion of the main video data, audio data, and sub-picture data and encode them by the respective compression schemes. The encoded main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are stored in memories 410, 411, and 412.

The main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are outputted to a file formatter (FFMT) 414 under the control of the system controller (Sys con) 405, which converts them so that they may have a file structure of video data for the system as explained earlier. Then, under the control of the system controller (Sys con) 405, the setting conditions for each data item and the management information including attributes are stored in a memory 416 in the form of files.

Explained next will be a standard flow of an encoding process in the system controller (Sys con) 405 that creates a file from video data.

According to the flow of FIG. 65, the main video data and audio data are encoded and the encoded main video data and audio data (Comp Video, Comp Audio) are supplied. Specifically, when the encoding process is started, as shown in step S270 of FIG. 65, the parameters necessary for encoding the main video data and audio data are set. Part of the set parameters are stored in the system controller (Sys con) 405 and at the same time, are used at the file formatter (FFMT) 414. As shown in step S271, the main video data is pre-encoded using the parameters and the optimum distribution of the amount of codes is calculated. Then, on the basis of the code amount distribution obtained in the pre-encoding, the main video data is encoded as shown in step S272. At the same time, the audio data is also encoded at step S272. As shown in step S273, if necessary, the main video data is partially encoded again and the reencoded portion of the main video data is replaced

with the old one. Through the series of steps, the main video data and audio data are encoded. Furthermore, as shown in steps S274 and S275, the sub-picture data is encoded and the encoded sub-picture data (Comp Sub-pict) is supplied. Namely, the parameters necessary for encoding the sub-picture data are set. As shown in step S274, part of the parameters are stored in the system controller (Sys con) 405 and used in the file formatter (FFMT) 414. On the basis of the parameters, the sub-picture data is encoded as shown in step S275. By the process, the sub-picture data is encoded.

According to the flow of FIG. 66, the encoded main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are combined and converted so as to form a video data title set structure as explained in FIGS. 4 and 22. Specifically, as shown in step S276, a cell is set as the smallest unit of the video data and cell playback information on the cell (C\_PBI) is created. Then, as shown in step S277, the structure of the cells constituting a program chain and the main video, sub-picture, and audio attributes (the information obtained in encoding the respective data items is used as part of these attributes) are set. Then, as shown in FIG. 22, a video title set information management table information (VTSI\_MAT) 144 including information on program chains and a video title set program chain table (VTS\_PGCIT) 146 are created. At this time, as the need arises, a video title set direct access pointer table (VTS\_DAPT) is also created. The encoded main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are subdivided into specific packs. An NV pack is placed at the head of each VOB so that playback can be effected in the order of time code of each data item. With the NV packs arranged this way, each data cell is positioned so that a video object (VOB) may be composed of a plurality of cells as shown in FIG. 6. A set of such video objects is formatted into the title set structure.

In the flow of FIG. 66, the program chain information (PGI) is obtained in the process of step S277 by using the database in the system controller (Sys con) 405 or entering data again as the need arises.

FIG. 67 shows a disk formatter system that records on an optical disk the title set formatted as described above. In the disk formatter system of FIG. 67, the memories 420, 422 in which the created title set is stored supply these file data items to a volume formatter (VFMT) 426. The volume formatter (VFMT) 426 extracts the management information from the title sets 284, 286, produces a video manager 101, and creates the logic data to be recorded on the disk 10 in the arrangement of FIG. 4. A disk formatter (DFMT) 428 adds error correction data to the logic data created at the volume formatter (VFMT) 426, thereby reconverting the logic data into physical data to be recorded on the disk. A modulator 430 converts the physical data created at the disk formatter (DFMT) 428 into the recording data to be recorded actually on the disk. Then, a recorder 432 records the modulated recording data on the disk 10.



A standard flow for creating the aforementioned disk will be described with reference to FIGS. 68 and 69. FIG. 68 shows the flow of creating the logic data to be recorded on the disk 10. Specifically, as shown in step S280, parameter data items, including the number of video data files, their arrangement, and the size of each video data file, are set first. Next, as shown in step S281, a video manager 101 is created from the set parameters and the video title set information 140 in each video title set 102. Thereafter, as shown in step S282, the video manager 101 and video title set 102 are arranged in that order according to the corresponding logical block number, thereby creating the logic data to be recorded on the disk 10.

Thereafter, the flow of creating the physical data to be recorded on the disk as shown in FIG. 69 is executed. Specifically, as shown in step S283, the logic data is divided into units of a specific number of bytes, thereby forming error correction data. Next, as shown in step S284, the logic data divided into units of a specific number of bytes are combined with the created error correction data to form physical sectors. Thereafter, as shown in step S285, physical data is created by combining physical sectors. In this way, the modulating process based on certain rules is performed on the physical data created in the flow of FIG. 69, thereby forming the recording data. Thereafter, the recording data is recorded on the disk 10.

The above-described data structure can be applied not only to a case where the data is recorded on recording mediums, such as optical disks, and then the disks are distributed to the users, who play back them, but also to a communication system as shown in FIG. 70. Specifically, according to the procedures shown in FIGS. 64 to 67, an optical disk 10 in which a video manager 101 and video title sets 102 as shown in FIG. 4 are stored may be loaded into a reproducing apparatus 450, from whose system CPU section 50 the encoded data is taken out digitally and transmitted by a modulator/transmitter 460 to the users or the cable subscribers by radio or via a cable. Furthermore, the encoding system 490 and format system shown in FIGS. 63 and 66 may encode and format the data, respectively, on the provider side, such as a broadcasting station, and the formatted data may be transmitted by the modulator/transmitter 460 to the users or the cable subscribers by radio or via cables. In such a communication system, the information in the video manager 101 is modulated at the modulator/transmitter 460 and then supplied to or is directly supplied to the users free of charge. When a user is interested in the title, the modulator/transmitter 460 transmits the title set 102 at the user's or subscriber's request by radio or via a cable. Under the control of the video manager 101, the video title set information 140 is first transferred and then the title video object 141 in the video title set reproduced according to the title set information 140 is transferred. At this time, if necessary, the video title set menu video object 141 is also transmitted. The transferred data is

received by a receiver/demodulator 480 on the user side and is processed as decoded data at the system CPU section 50 of the reproducing apparatus on the user or subscriber side of FIG. 1 in the same manner as in the above-described reproducing process, whereby the video data is reproduced.

As described above, the recording medium according to the present invention is able to forcibly reproduce the sub-picture in accordance with the state of reproduction. Thus, video data can be provided with which a problem in that a user cannot understand the story can be prevented.

### Claims

1. A recording medium having a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged, said recording medium characterized by comprising:

a sub-picture data unit (230) composed of a plurality of sub-picture packs (90), wherein control information (233) for forcibly controlling reproduction of sub-picture data (232) is described in said sub-picture data unit (230).

2. A recording medium according to claim 1, characterized in that sub-picture data (232) is run-length-compressed and stored in said pack (90).
3. A recording medium according to claim 1, characterized in that control information (232) in said sub-picture data unit (230) includes time information for reproducing said sub-picture data unit (230).
4. A recording medium according to claim 1, characterized in that control information (233) in said sub-picture data unit (230) includes a command (234) for controlling display of said sub-picture data unit (230).
5. A recording medium according to claim 4, characterized in that said display command (234) includes a forcible picture output command for forcibly causing image data to appear.
6. A recording medium according to claim 4, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started.
7. A recording medium according to claim 4, characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted.
8. A recording medium according to claim 4, charac-



terized in that said display command (234) includes a completion command for completing a set command.

9. A recording medium according to claim 1, characterized in that said sub-picture pack sequence includes sub-picture data streams in a plurality of different languages. 5
10. A recording medium according to claim 1, characterized in that said audio pack sequence (91) includes audio data streams in a plurality of different languages. 10
11. A recording medium according to claim 1, characterized by further comprising menu data for selecting the sub-picture. 15
12. A reproducing method structured such that a sub-picture is reproduced from a recording medium (10) having a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged, said reproducing method characterized by comprising the steps of: 20
  - acquiring a sub-picture data unit (230) composed of a plurality of sub-picture packs (90) from said recording medium (10); and
  - acquiring control information (233) for forcibly controlling reproduction of sub-picture data (232) described in said sub-picture data unit (230) to control output of pixel data in said sub-picture data unit (230) in accordance with acquired control information (233). 30
13. A reproducing method according to claim 12, characterized in that said output control step includes a step of elongating sub-picture data (232) run-length-compressed and stored in said pack (90) to decode sub-picture data (232) into pixel data. 40
14. A reproducing method according to claim 12, characterized in that control information (233) in said sub-picture data unit (230) includes time information for reproducing said sub-picture data unit (230), and said output control step is performed such that pixel data is output in accordance with time information. 45
15. A reproducing method according to claim 12, characterized in that control information (233) in said sub-picture data unit (230) includes a command to control display of said sub-picture data unit (230), and said output control step is structured to control output. 50
16. A reproducing method according to claim 15, characterized in that said display command (234) 55

includes a forcible picture output command for forcibly causing image data to appear, and said output control step is structured to output pixel data in accordance with said forcible picture output command.

17. A reproducing method according to claim 15, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started, and said output control step is structured to output pixel data in accordance with said reproduction start command.
18. A reproducing method according to claim 15, characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted, and said output control step is structured to interrupt output of pixel data in accordance with said reproduction interruption command.
19. A reproducing method according to claim 15, characterized in that said display command (234) includes a completion command for completing a set command.
20. A reproducing method according to claim 12, characterized in that said sub-picture pack sequence (85) includes sub-picture data streams in a plurality of different languages.
21. A reproducing method according to claim 12, characterized in that said audio pack sequence includes audio data streams in a plurality of different languages.
22. A reproducing method according to claim 12, characterized by further comprising menu data for selecting the sub-picture.
23. A reproducing apparatus for reproducing a sub-picture from a recording medium (10) having a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged, said reproducing apparatus comprising:
  - means (30, 50, 52, 54, 56) for retrieving a sub-picture data unit (230) composed of a plurality of sub-picture packs (90) from said recording medium (10); and
  - means (62, 64) for retrieving control information (233) for controlling reproduction of sub-picture data described in said sub-picture data unit (230) to control output of pixel data in said sub-picture data unit (232) in accordance with retrieved control information (233).

24. A reproducing apparatus according to claim 23, characterized in that said output control means includes means for expanding sub-picture data (232) run-length compressed and stored in said pack (90) to decode sub-picture data into pixel data. 5
25. A reproducing apparatus according to claim 23, characterized in that control information (232) in said sub-picture data unit (230) includes time information for reproducing said sub-picture data unit (230), and said output control means outputs pixel data in accordance with time information. 10
26. A reproducing apparatus according to claim 23, characterized in that control information (232) in said sub-picture data unit (230) includes a command (234) for controlling display of control information, and said output control means controls output in accordance with said display control command (234). 15 20
27. A reproducing apparatus according to claim 26, characterized in that said display command (234) includes a forcible picture output command for forcibly causing image data to appear, and said output control means outputs pixel data in accordance with said forcible picture output command. 25
28. A reproducing apparatus according to claim 26, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started, and said output control means outputs pixel data in accordance with said reproduction start command. 30 35
29. A reproducing apparatus according to claim 26, characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted, and said output control means interrupt output of pixel data in accordance with said reproduction interruption command. 40
30. A reproducing apparatus according to claim 26, characterized in that said display command (234) includes a completion command for completing a set command. 45
31. A reproducing apparatus according to claim 23, characterized in that said sub-picture pack sequence (85) includes sub-picture data streams in a plurality of different languages. 50
32. A reproducing apparatus according to claim 23, characterized in that said audio pack sequence (85) includes audio data streams in a plurality of different languages. 55
33. A reproducing apparatus according to claim 23, characterized by further comprising menu data for selecting the sub-picture.
34. A recording method structured such that a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged is recorded on a recording medium (10), said recording method characterized by comprising the steps of:  
forming a sub-picture data unit (230) by a plurality of sub-picture packs (90); and describing control information for forcibly controlling reproduction of sub-picture data (232) in said sub-picture data unit (230).
35. A recording method according to claim 34, characterized by further comprising a step of run-length-compressing sub-picture data to store sub-picture data in said pack (90).
36. A recording method according to claim 34, characterized in that control information (233) in said sub-picture data unit (230) includes time information for reproducing said sub-picture data unit (230).
37. A recording method according to claim 34, characterized in that control information (233) in said sub-picture data unit (230) includes a command for controlling display of control information.
38. A recording method according to claim 37, characterized in that said display command (234) includes a forcible picture output command for forcibly causing image data to appear.
39. A recording method according to claim 37, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started.
40. A recording method according to claim 37, characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted.
41. A recording method according to claim 37, characterized in that said display command (234) includes a completion command for completing a set command.
42. A recording method according to claim 34, characterized in that said sub-picture pack sequence (85) includes sub-picture data streams in a plurality of different languages.
43. A recording method according to claim 34, charac-

terized in that said audio pack sequence includes audio data streams in a plurality of different languages.

44. A recording method according to claim 34, characterized by further comprising menu data for selecting the sub-picture.

45. A recording apparatus for recording, on a recording medium (10) having a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged, said recording apparatus characterized by comprising:

means (403, 408, 412) for forming a sub-picture data unit (85) by a plurality of sub-picture packs (90); and  
means (405, 414, 416, 426, 428, 430, 432) for describing control information (232) for controlling reproduction of sub-picture data (232) in said sub-picture data unit (85).

46. A recording apparatus according to claim 45, characterized by further comprising means for run-length-compressing sub-picture data (232) to store sub-picture data (232) in said pack (85).

47. A recording apparatus according to claim 45, characterized in that control information (232) in said sub-picture data unit (85) includes time information for reproducing said sub-picture data unit (85).

48. A recording apparatus according to claim 45, characterized in that control information (232) in said sub-picture data unit (85) includes a command for controlling display of control information.

49. A recording apparatus according to claim 48, characterized in that said display command (234) includes a forcible picture output command for forcibly causing image data to appear.

50. A recording apparatus according to claim 48, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started.

51. A recording apparatus according to claim 48, characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted.

52. A recording apparatus according to claim 48, characterized in that said display command (234) includes a completion command for completing a set command.

53. A recording apparatus according to claim 48, characterized in that said sub-picture pack sequence (85) includes sub-picture data streams in a plurality of different languages.

54. A recording apparatus according to claim 48, characterized in that said audio pack sequence includes audio data streams in a plurality of different languages.

55. A recording apparatus according to claim 48, characterized by further comprising menu data for selecting the sub-picture.

56. A communication apparatus for transferring a data pack sequence (85) in which sub-picture data packs (90) and one or both of video and audio data packs (88, 90, 91) are arranged, said communication apparatus characterized by comprising:

means (450, 490, 460, 470) for transferring, to said recording medium (10), a sub-picture data unit (85) composed of a plurality of sub-picture packs (90), said means (450, 490, 460, 470) being transferring means (470) for transferring control information (233) for controlling reproduction of sub-picture data (232) to be described in said sub-picture data unit (85) and controlling output of pixel data in said sub-picture data unit (85) in accordance with transferred control information (233).

57. A communication apparatus according to claim 56, characterized in that said transferring means (450, 490, 460, 470) transfers sub-picture data (232) run-length-compressed and stored in said pack (90).

58. A communication apparatus according to claim 56, characterized in that control information (233) in said sub-picture data unit (85) includes time information for reproducing said sub-picture data unit.

59. A communication apparatus according to claim 56, characterized in that control information (233) in said sub-picture data unit (85) includes a command (234) for controlling display of control information.

60. A communication apparatus according to claim 56, characterized in that said display command (234) includes a forcible picture output command for forcibly causing image data to appear.

61. A communication apparatus according to claim 56, characterized in that said display command (234) includes a reproduction start command for setting timing at which reproduction of image data is started.

62. A communication apparatus according to claim 61,

characterized in that said display command (234) includes a reproduction interruption command for setting timing at which reproduction of image data is interrupted.

5

63. A communication apparatus according to claim 61, characterized in that said display command (234) includes a completion command for completing a set command.

10

64. A communication apparatus according to claim 56, characterized in that said sub-picture pack sequence (85) includes sub-picture data streams in a plurality of different languages.

15

65. A communication apparatus according to claim 56, characterized in that said audio pack sequence includes audio data streams in a plurality of different languages.

20

66. A communication apparatus according to claim 56, characterized by further comprising menu data for selecting the sub-picture.

25

30

35

40

45

50

55

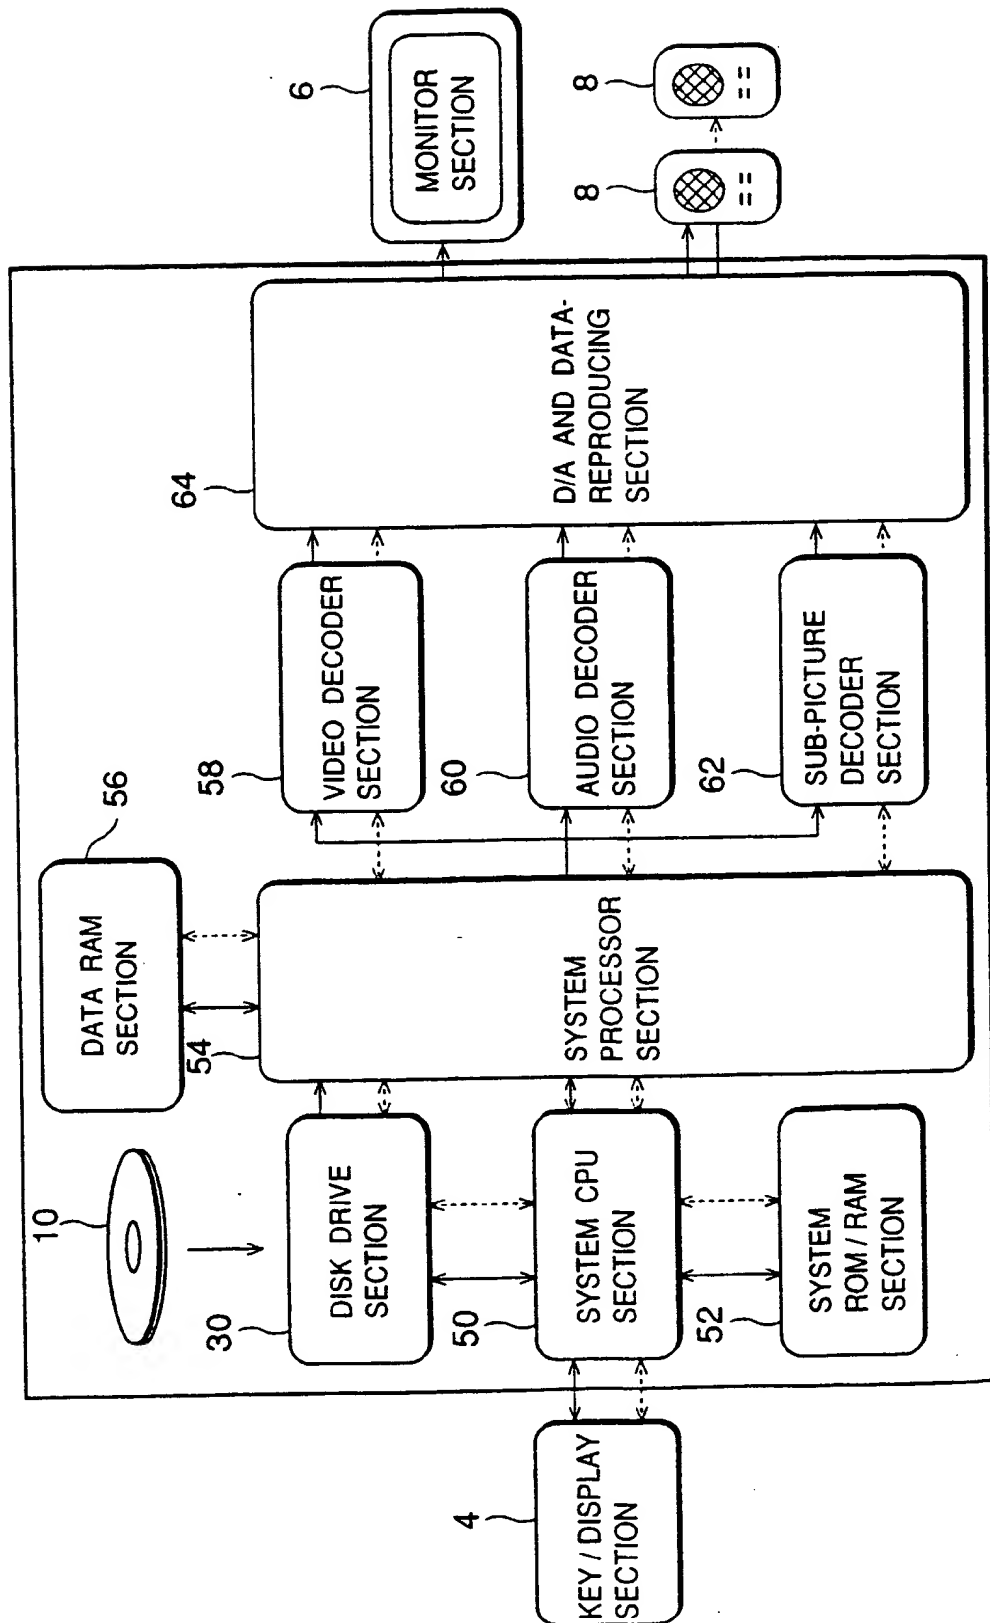


FIG.1

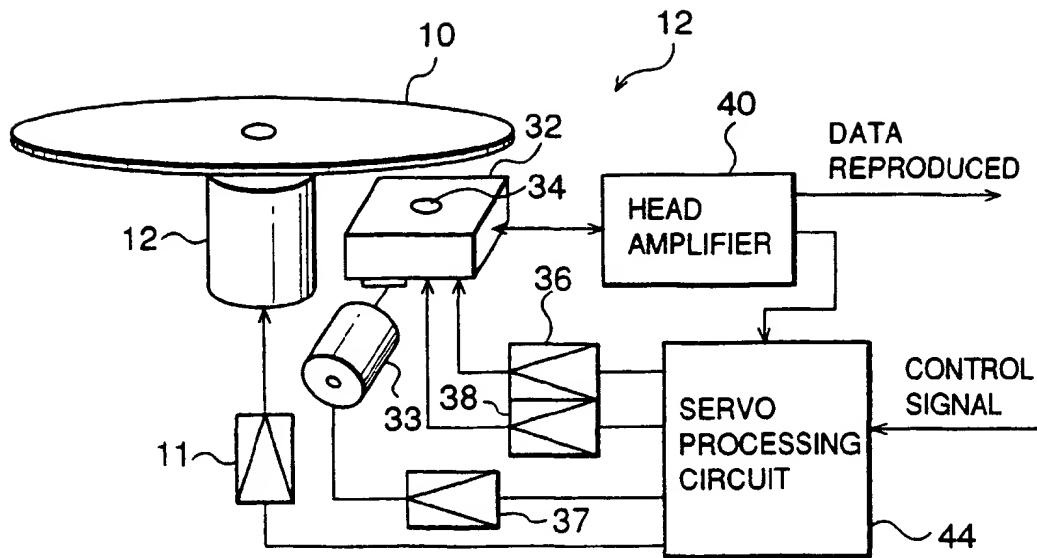


FIG.2

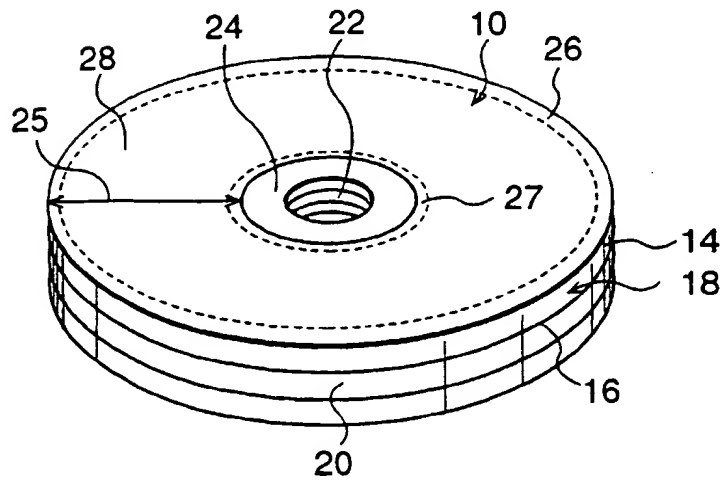


FIG.3

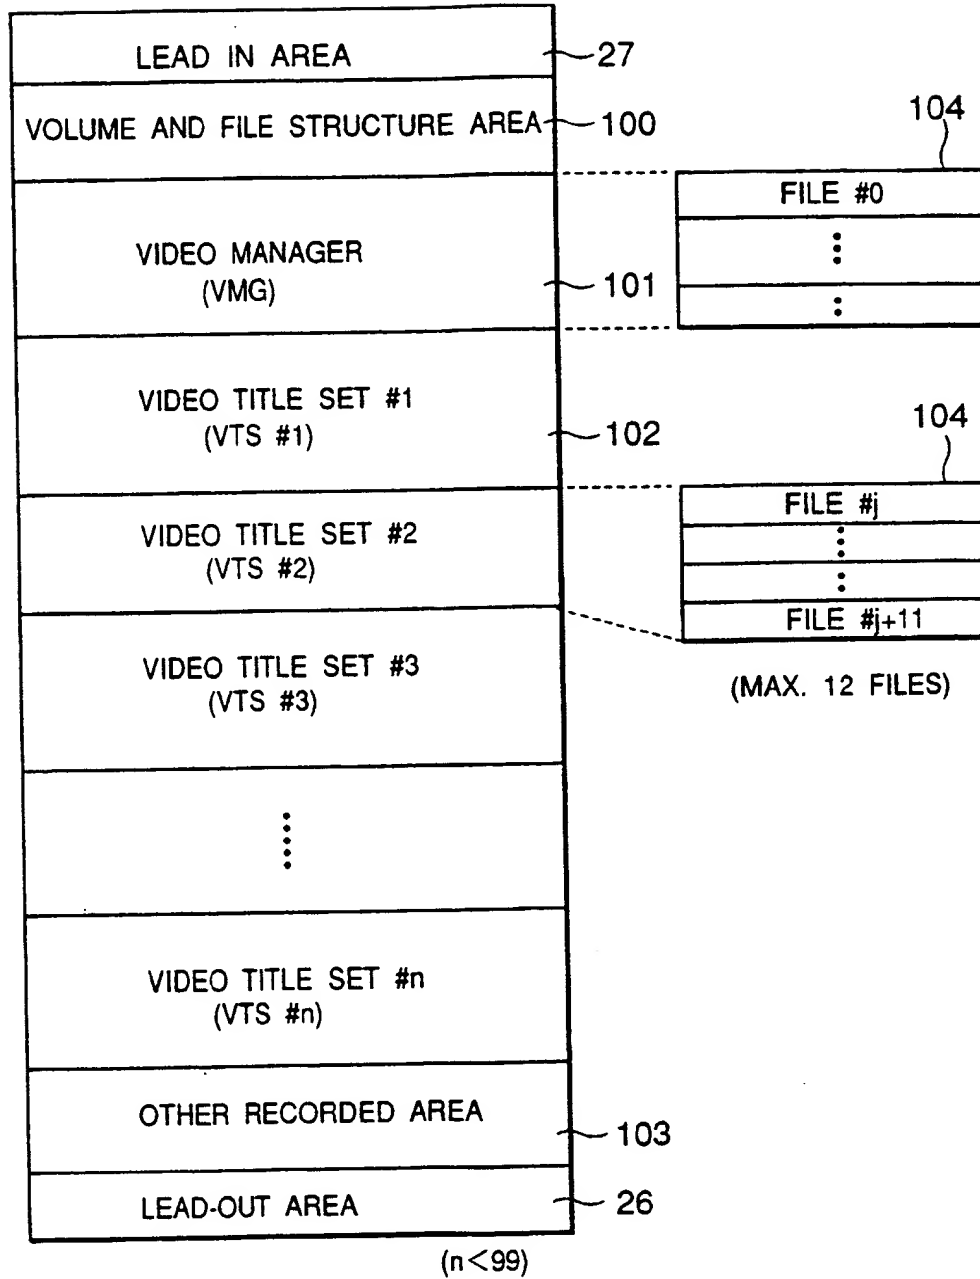


FIG.4



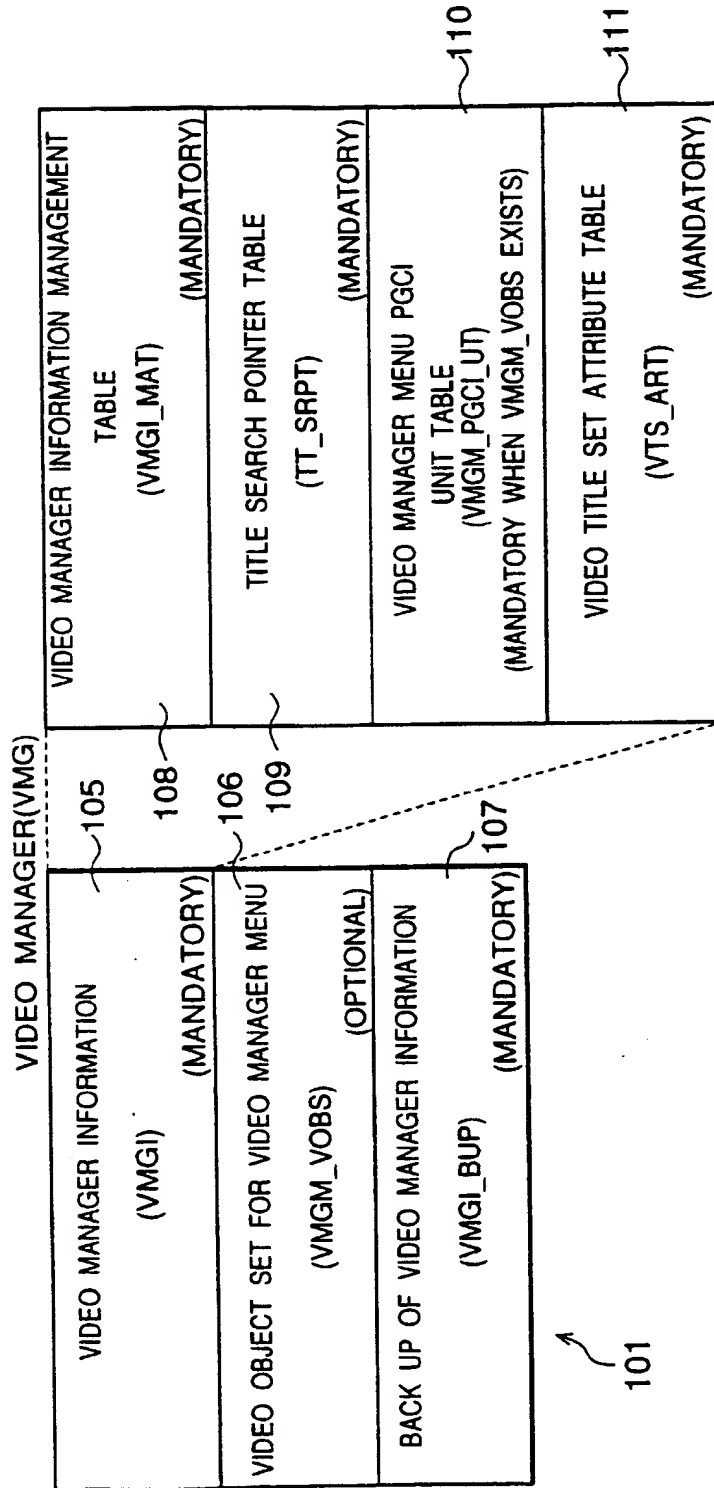


FIG.5


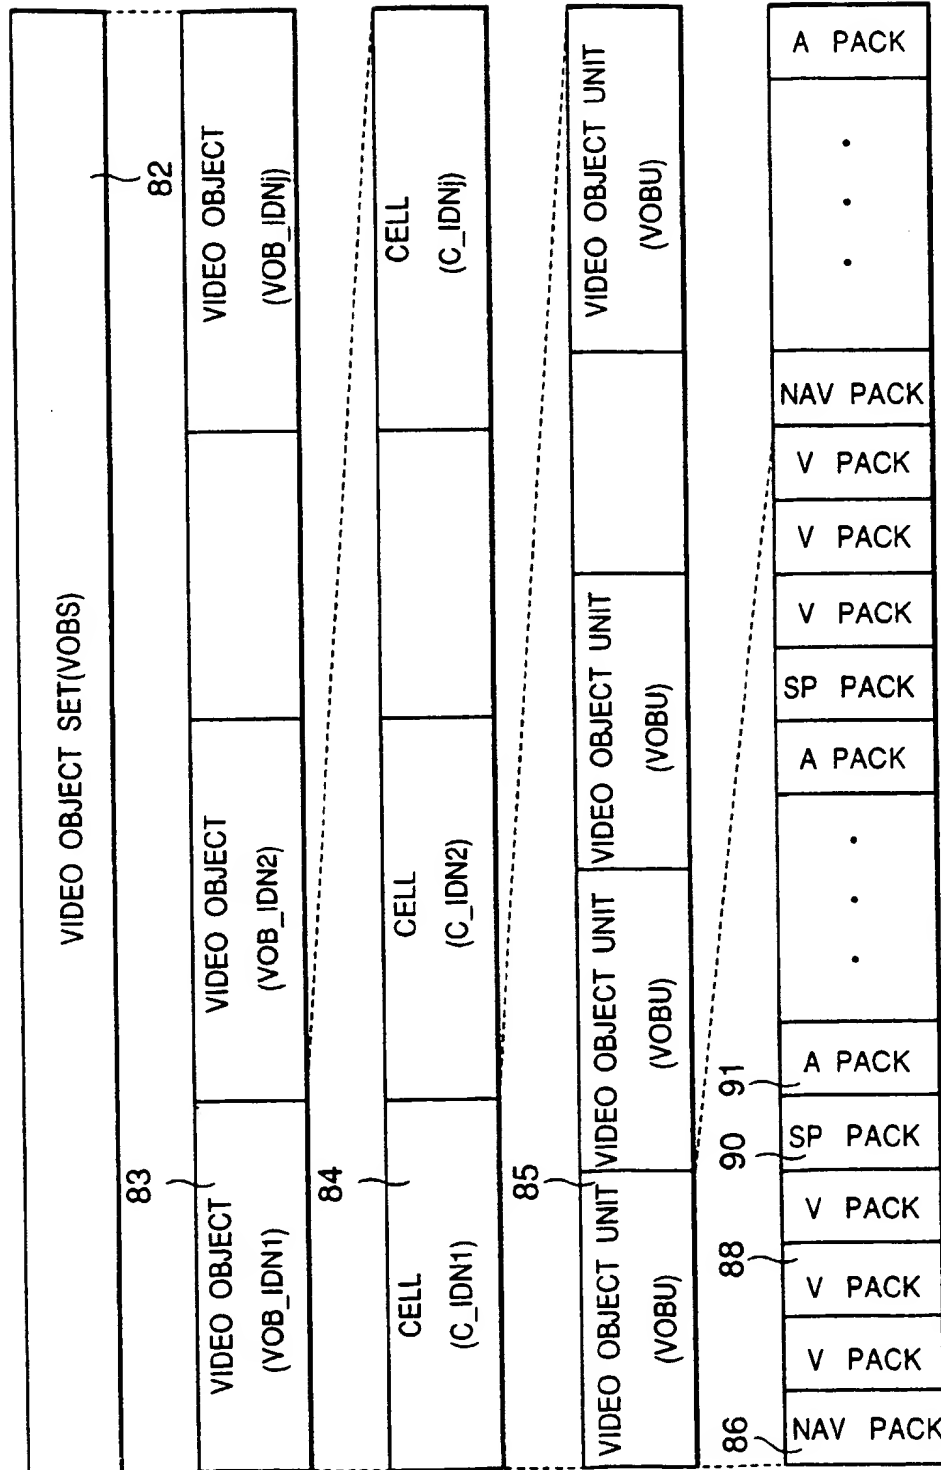


FIG.6

VMGI_MAT	CONTENT	(DESCRIPTION ORDER)
VMG_ID	VIDEO MANAGER IDENTIFIER	
VMG_EA	END ADDRESS OF VMG	
VMGI_EA	END ADDRESS OF VMGI	
VERN	VERSION NUMBER OF DVD VIDEO SPECIFICATION	
VMG_CAT	VIDEO MANAGER CATEGORY	
VLMS_ID	VOLUME SET IDENTIFIER	
VTS_Ns	NUMBER OF VIDEO TITLE SET	
PVR_ID	PROVIDER UNIQUE ID	
VMGI_MAT_EA	END ADDRESS OF VMGI_MAT	
VMGM_VOBS_SA	VIDEO MANAGER MENU VIDEO OBJECT SET START ADDRESS	
TT_SRPT_SA	START ADDRESS OF TT_SRPT	
VMGM_PGCI_UT_SA	START ADDRESS OF VMGM_PGCI_UT	
VTS_ATRT_SA	START ADDRESS OF VTS_ATRT	
VMGM_V_ATR	VIDEO ATTRIBUTE OF VMGM	
VMGM_AST_Ns	NUMBER OF AUDIO STREAM OF VMGM	
VMGM_AST_ATR	AUDIO STREAM ATTRIBUTE OF VMGM	
VMGM_SPST_Ns	NUMBER OF SUB-PICTURE STREAM OF VMGM	
VMGM_SPST_ATR	SUB-PICTURE STREAM ATTRIBUTE OF VMGM	

FIG.7

TT\_SRPT

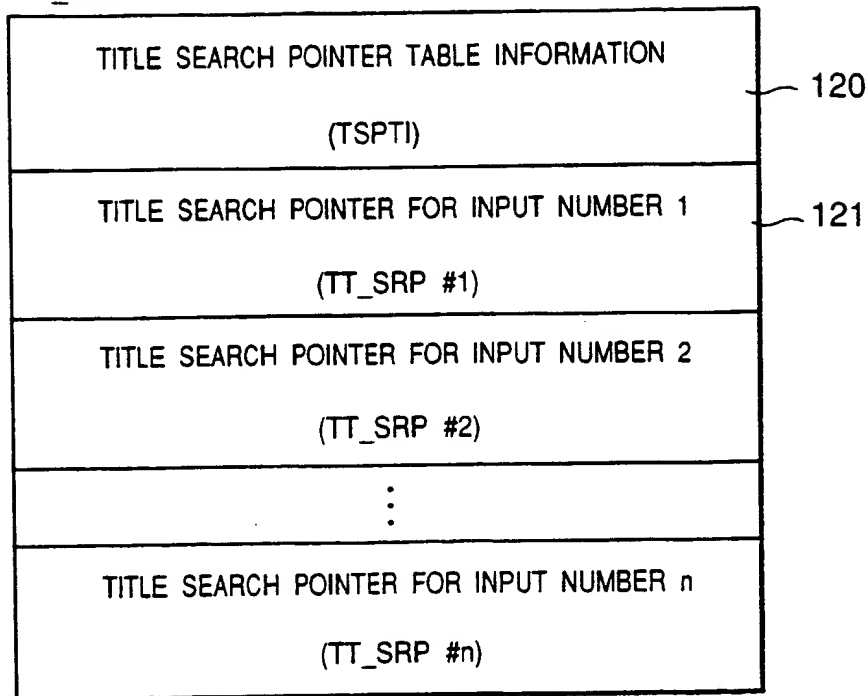

109

FIG.8

TT_SRPTI	(DESCRIPTION ORDER)
	CONTENTS
TT_SRP_Ns	NUMBERS OF TITLE SEARCH POINTERS
TT_SRPT_EA	END ADDRESS OF TT_SRPT

FIG.9

TT_SRP	(DESCRIPTION ORDER)
	CONTENTS
TT_PB_TY	TITLE PLAYBACK TYPE
AGL_Ns	NUMBER OF ANGLES
PTT_Ns	NUMBER OF PART OF TITLE
VTSN	VTS NUMBER
VTS_TTN	VTS TITLE NUMBER
VTS_SA	START ADDRESS OF VIDEO TITLE SET

FIG.10


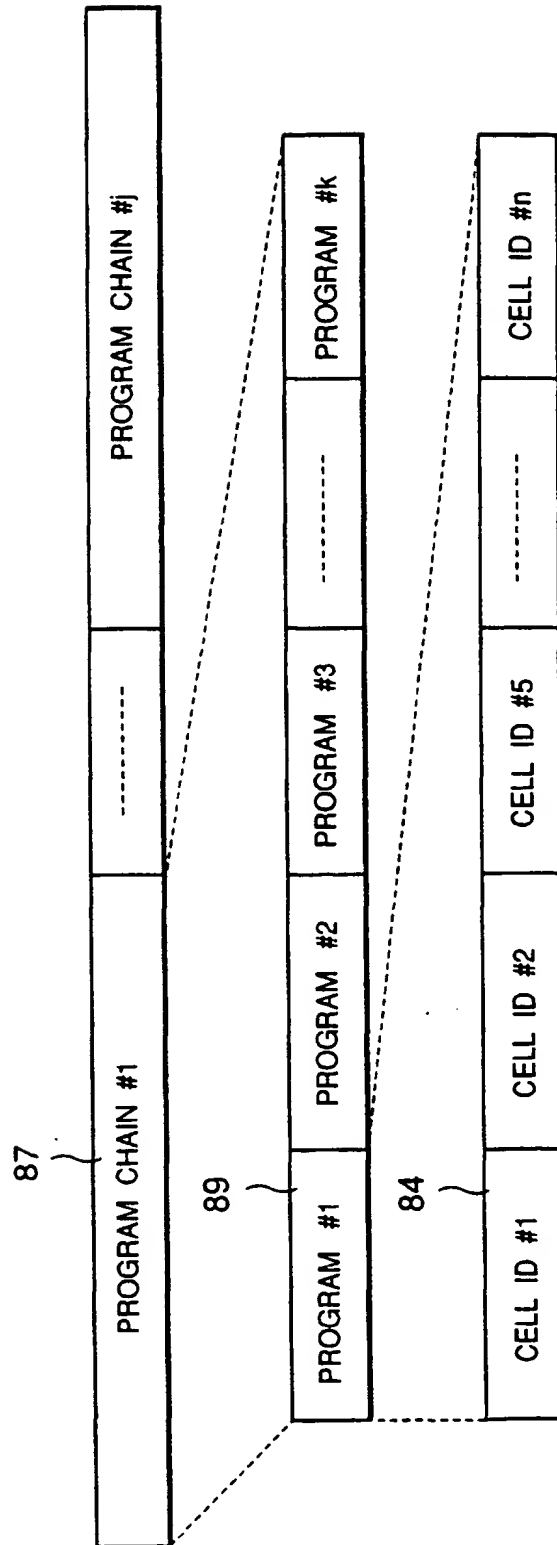


FIG.11

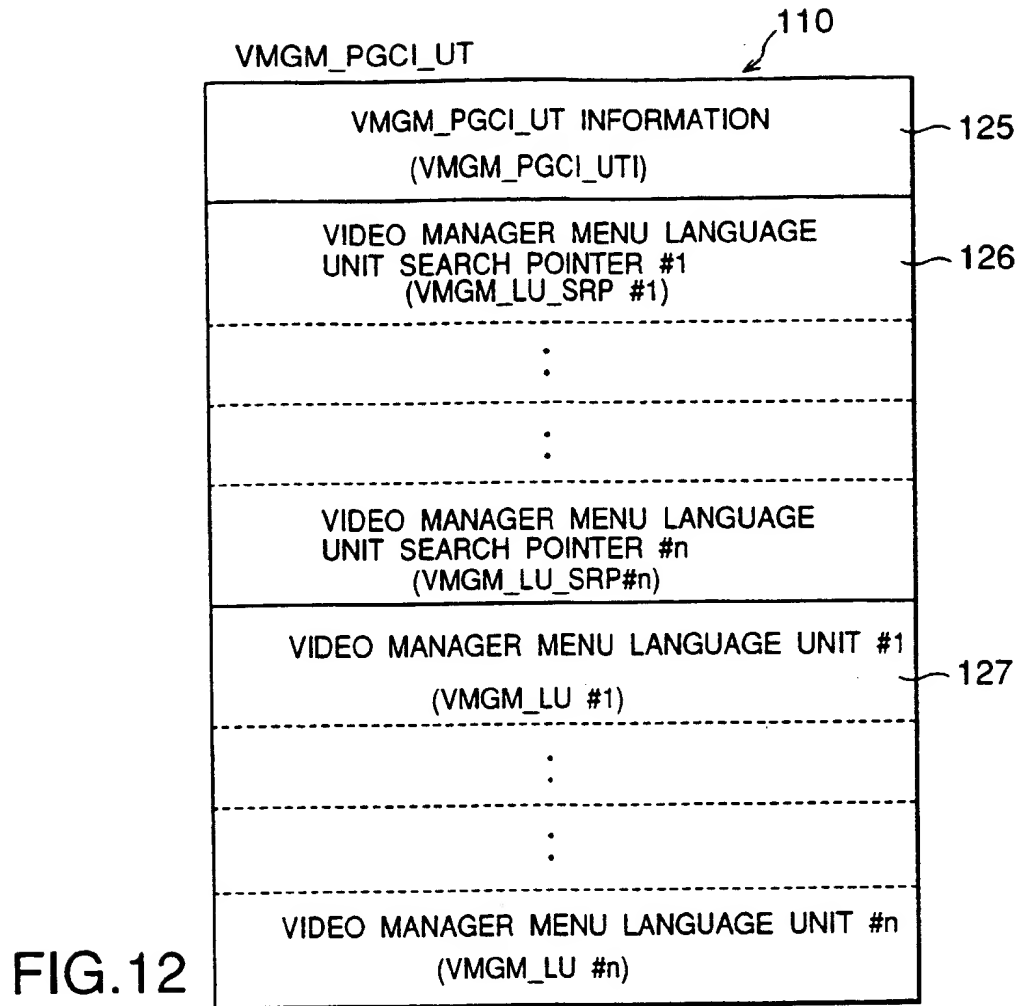


VMGM_PGCI_UTI	
	CONTENTS
VMGM_LU_Ns	NUMBER OF VIDEO MANAGER MENU LANGUAGE UNITS
VMGM_PGCI_UT_EA	END ADDRESS OF VMGM_PGCI_UT

FIG.13

VMGM_LU_SRP	
	CONTENTS
VMGM_LCD	VIDEO MANAGER MENU LANGUAGE CODE
VMGM_LU_SA	START ADDRESS OF VMGM_LU

FIG.14

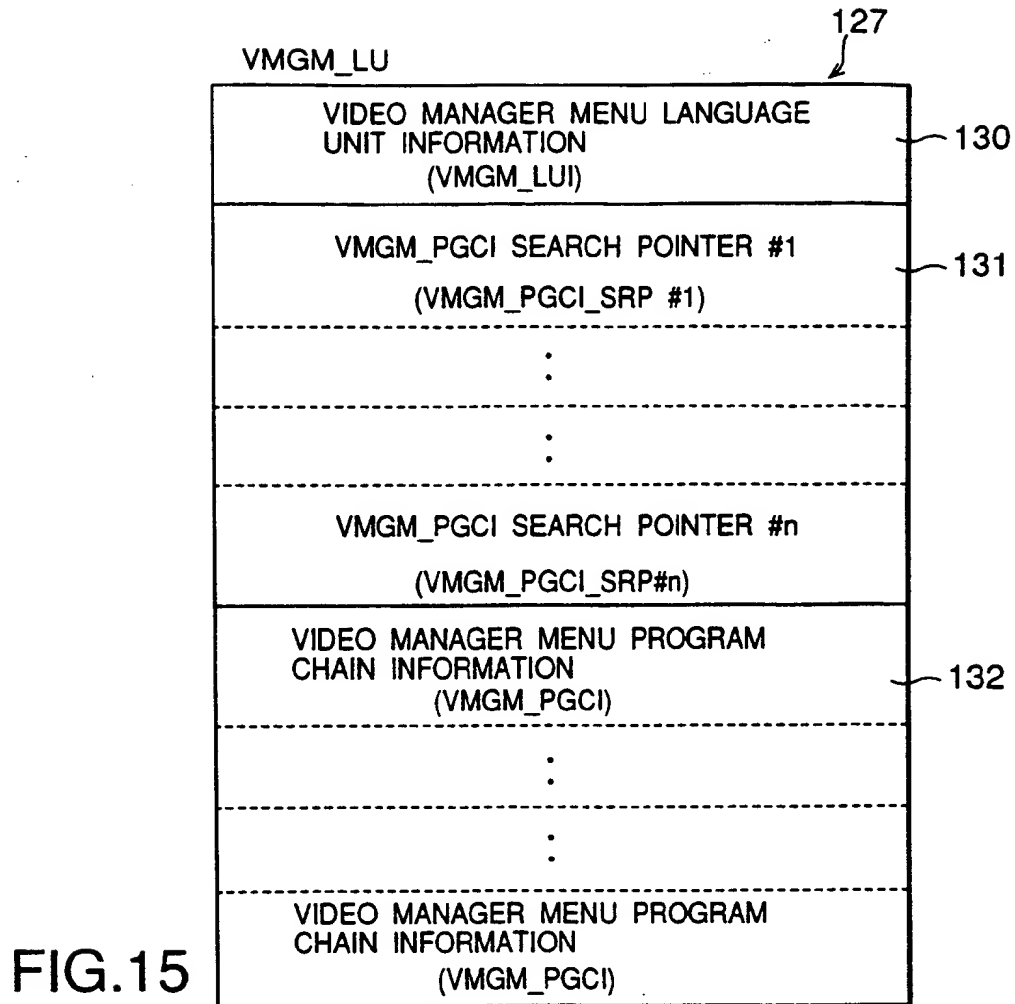

VMGM_LUI	
	CONTENTS
VMGM_PGCi_SRP_Ns	NUMBER OF VMGM_PGCi_SRPs
VMGM_LUI_EA	END ADDRESS OF VMGM_LUI

FIG.16

VMGM_PGCi_SRP	
	CONTENTS
VMGM_PGC-CAT	VMGM_PGC CATEGORY
VMGM_PGCi_SA	START ADDRESS OF VMGM_PGCi

FIG.17



VTS\_ATRT

VIDEO TITLE SET ATTRIBUTE TABLE INFORMATION (VTS_ATRTI)	133
VIDEO TITLE SET ATTRIBUTE SEARCH POINTER FOR VTS #1 (VTS_ATR_SRP #1)	134
VIDEO TITLE SET ATTRIBUTE SEARCH POINTER FOR VTS #1 (VTS_ATR_SRP #n)	
VIDEO TITLE SET ATTRIBUTE FOR VTS #1 (VTS_ATR #1)	135
VIDEO TITLE SET ATTRIBUTE FOR VTS #n (VTS_ATR #n)	

FIG.18

111

FIG.19

VTS_ATRTI	
	CONTENTS
VTS_Ns	NUMBER OF VTSs
VTS_ATRT_EA	END ADDRESS OF VTS_ATRT

FIG.20

VTS_ATR_SRP	
	CONTENTS
(1)VTS_ATR_SA	START ADDRESS OF VTS_ATR

FIG.21

VTS_ATR	
	CONTENTS
VTS_ATR_EA	END ADDRESS OF VTS_ATR
VTS_CAT	VIDEO TITLE SET CATEGORY
VTS_ATRI	VIDEO TITLE SET ATTRIBUTE INFORMATION

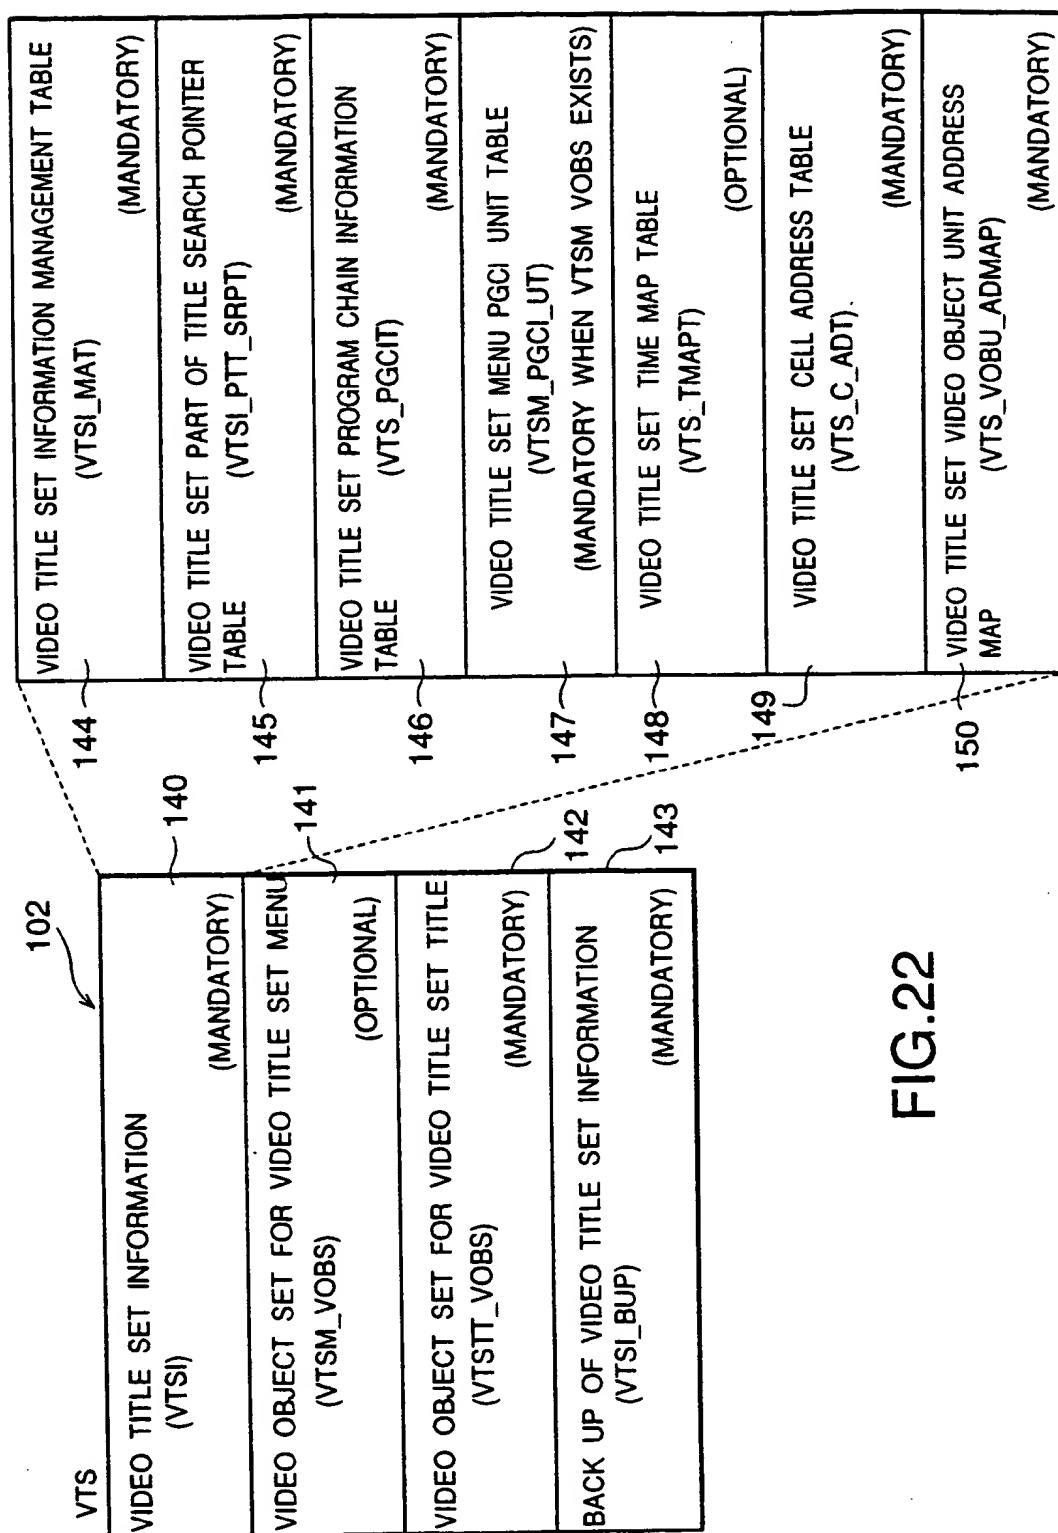


FIG.22

VTSL_MAT	CONTENTS
VTSL_ID	VTSL IDENTIFIER
VTSL_EA	END ADDRESS OF VTSL
VTSL_EA	END ADDRESS OF VTSL
VERN	VERSION NUMBER OF DVD VIDEO SPECIFICATION
VTSL_CAT	VTSL CATEGORY
VTSL_MAT_EA	END ADDRESS OF VTSL_MAT
VTSL_VOBS_SA	START ADDRESS OF VTSL_VOBS
VTSL_VOBS_SA	START ADDRESS OF VTSL_VOBS
VTSL_PTT_SRPT_SA	START ADDRESS OF VTSL_PTT_SRPT
VTSL_PGCIT_SA	START ADDRESS OF VTSL_PGCIT
VTSL_PGCIT_UT_SA	START ADDRESS OF VTSL_PGCIT_UT
VTSL_TMAPT_SA	START ADDRESS OF VTSL_TMAPT
VTSL_C_ADT_SA	START ADDRESS OF CELL ADDRESS TABLE
VTSL_VOBU_ADMAP_SA	START ADDRESS OF VOB ADDRESS MAP
VTSL_V_ATR	VIDEO ATTRIBUTE OF VTSL
VTSL_AST_Ns	NUMBER OF AUDIO STREAMS OF VTSL
VTSL_AST_ATR	AUDIO STREAMS ATTRIBUTE OF VTSL
VTSL_SPST_Ns	NUMBER OF SUB-PICTURE STREAMS OF VTSL
VTSL_SPST_ATR	SUB-PICTURE STREAMS ATTRIBUTE OF VTSL
VTSL_V_ATR	VIDEO ATTRIBUTE OF VTSL
VTSL_AST_Ns	NUMBER OF AUDIO STREAMS OF VTSL
VTSL_AST_ATR	AUDIO STREAM ATTRIBUTE OF VTSL
VTSL_SPST_Ns	NUMBER OF SUB-PICTURE STREAMS OF VTSL
VTSL_SPST_ATR	SUB-PICTURE STREAM ATTRIBUTE OF VTSL
VTSL_MU_AST_ATR	MULTICHANNEL AUDIO STREAM ATTRIBUTE OF VTSL

FIG.23

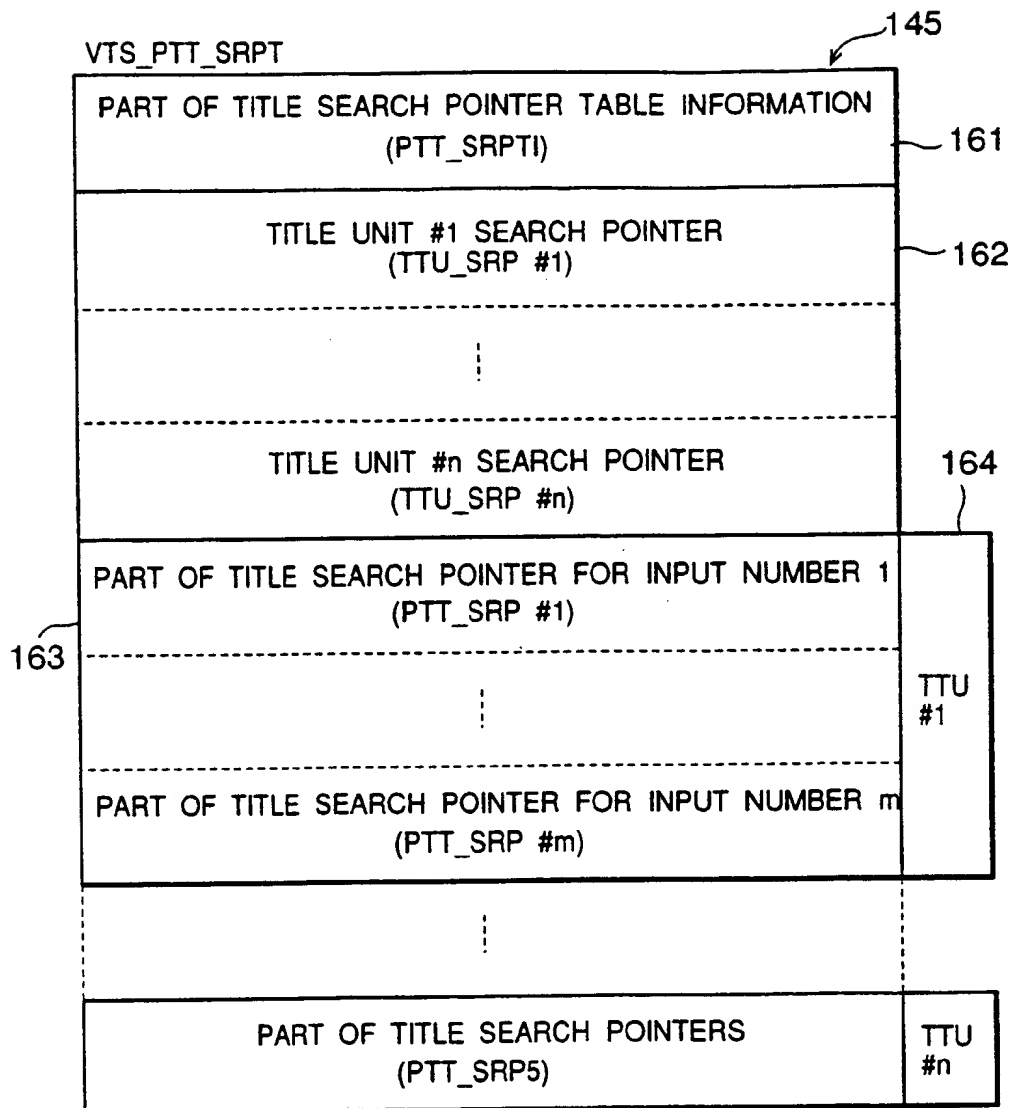


FIG.24

FIG.25

PTT_SRPTI	
	CONTENTS
VTS_TTU_Ns	NUMBER OF TTU IN VTS
VTS_PTT_SRPT_EA	END ADDRESS OF VTS PTT SRPT

FIG.26

TTU_SRP	
	CONTENTS
(1)TTU_SA	START ADDRESS OF TTU

FIG.27

PTT_SRP	
	CONTENTS
PGC_N	PROGRAM CHAIN NUMBER
PG_N	PROGRAM NUMBER

VTS\_PGCIT

VIDEO TITLE SET PROGRAM CHAIN INFORMATION TABLE INFORMATION (VTS_PGCIT_I)	172
VTS_PGCI #1 SEARCH POINTER (VTS_PGCIT_SRP #1)	173
VTS_PGCI #2 SEARCH POINTER (VTS_PGCIT_SRP #2)	
:	
VTS_PGCI #n SEARCH POINTER (VTS_PGCIT_SRP #n)	
VTS_PGCI (VTS_PGCI)	174
:	
VTS_PGCI (VTS_PGCI)	

146

FIG.28

VTS\_PGCIT\_I

(DESCRIPTION ORDER)

	CONTENT
VTS_PGC_Ns	NUMBER OF VTS_PGCs
VTS_PGCIT_EA	END ADDRESS OF VTS_PGCCIT

FIG.29

VTS\_PGCIT\_SRP

(DESCRIPTION ORDER)

	CONTENT
VTS_PGC_CAT	VIDEO TITLE SET PGC CATEGORY
VTS_PGCI_SA	START ADDRESS OF VTS_PGCI

FIG.30

VTS\_PGCI

174

PROGRAM CHAIN GENERAL INFORMATION (PGC_GI) (MANDATORY)	175
PROGRAM CHAIN COMMAND TABLE (PGC_CMDT) (OPTIONAL)	176
PROGRAM CHAIN PROGRAM MAP (PGC_PGMAP) (MANDATORY IF VOB EXISTS)	177
CELL PLAYBACK INFORMATION TABLE (C_PBIT) (MANDATORY IF VOB EXISTS)	178
CELL POSITION INFORMATION TABLE (C_POSIT) (MANDATORY IF VOB EXISTS)	179

FIG.31

PGC\_GI

	CONTENTS
PGC_CNT	PGC CONTENTS
PGC_PB_TM	PGC PLAYBACK TIME
PGC_UOP_CTL	PGC USER OPERATION CONTROL
PGC_SPST_CTL	PGC SUB-PICTURE STREAM CONTROL
PGC_AST_CTL	PGC AUDIO STREAM CONTROL
PGC_NV_CTL	PGC NAVIGATION CONTROL
PGC_SP_PLT	PGC SUB-PICTURE PALETTE
PGC_NV_CMDT_SA	START ADDRESS OF PGC_NV_CMDT
PGC_PGMAP_SA	START ADDRESS OF PGC_PGMAP
C_PBIT_SA	START ADDRESS OF C_PBIT
C_POSIT_SA	START ADDRESS OF C_POSIT

FIG.32

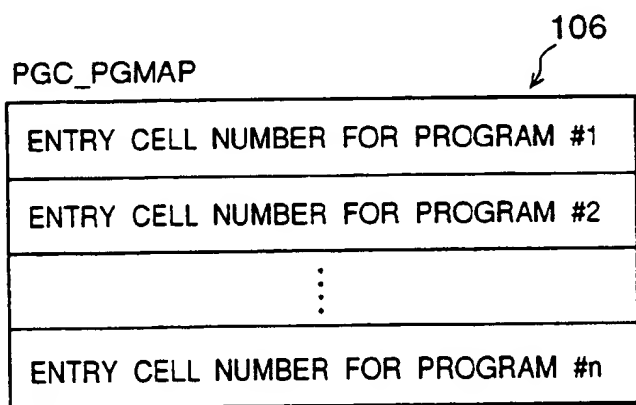


FIG.33

ENTRY CELL NUMBER	
	CONTENT
ECELLN	ENTRY CELL NUMBER

FIG.34

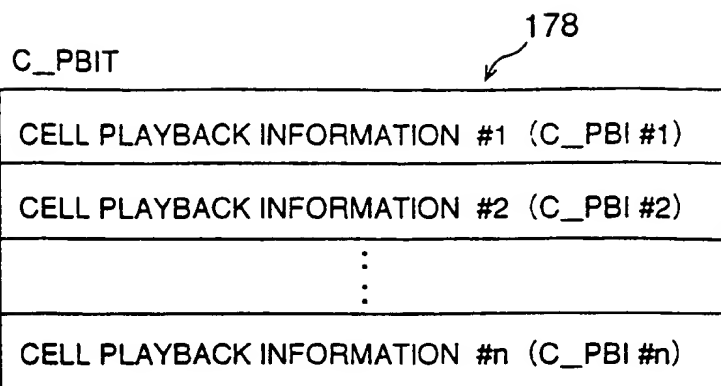


FIG.35

C_PBI	CONTENT
C_CAT	CELL CATEGORY
C_PBTM	CELL PLAYBACK TIME
C_FVOBU_SA	START ADDRESS OF THE FIRST VOB IN THE CELL
C_LVOBU_SA	START ADDRESS OF THE LAST VOB IN THE CELL
C_LVOBU_EA	END ADDRESS OF THE LAST VOB IN THE CELL

FIG.36


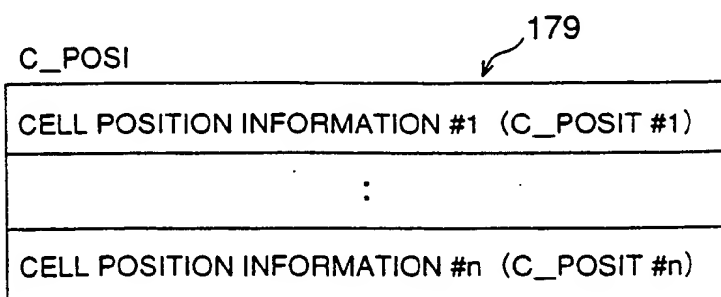


FIG.37

C_POSI	CONTENT
C_VOB_IDN	VOB ID NUMBER OF CELL
C_IDN	CELL ID NUMBER OF THE CELL

FIG.38



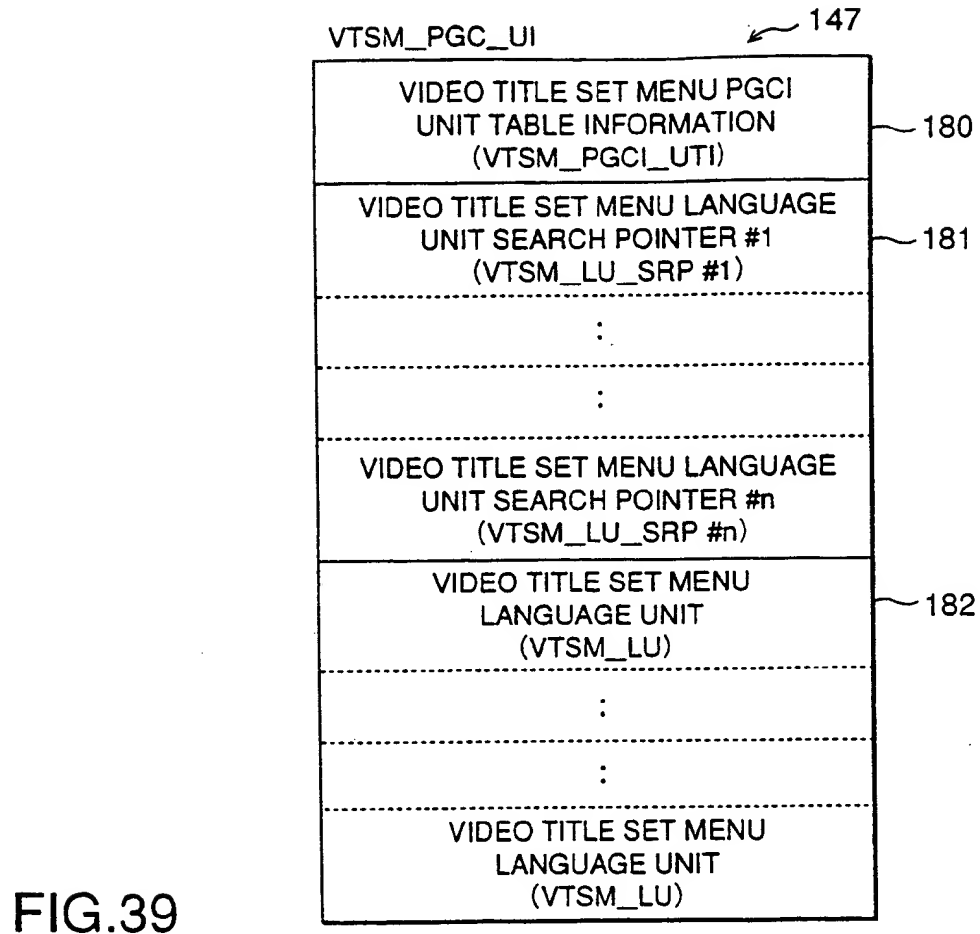

VTSM_PGCI_UTI	
	CONTENTS
VTSM_LU_Ns	NUMBER OF VIDEO TITLE SET MENU LANGUAGE UNITS
VTSM_PGCI_UT_EA	END ADDRESS OF VTSM_PGCI_UT

FIG.40

VTSM_LU_SRP	
	CONTENTS
VTSM_LCD	VIDEO TITLE SET MENU LANGUAGE CODE
VTSM_LU_SA	START ADDRESS OF VTSM_LU

FIG.41

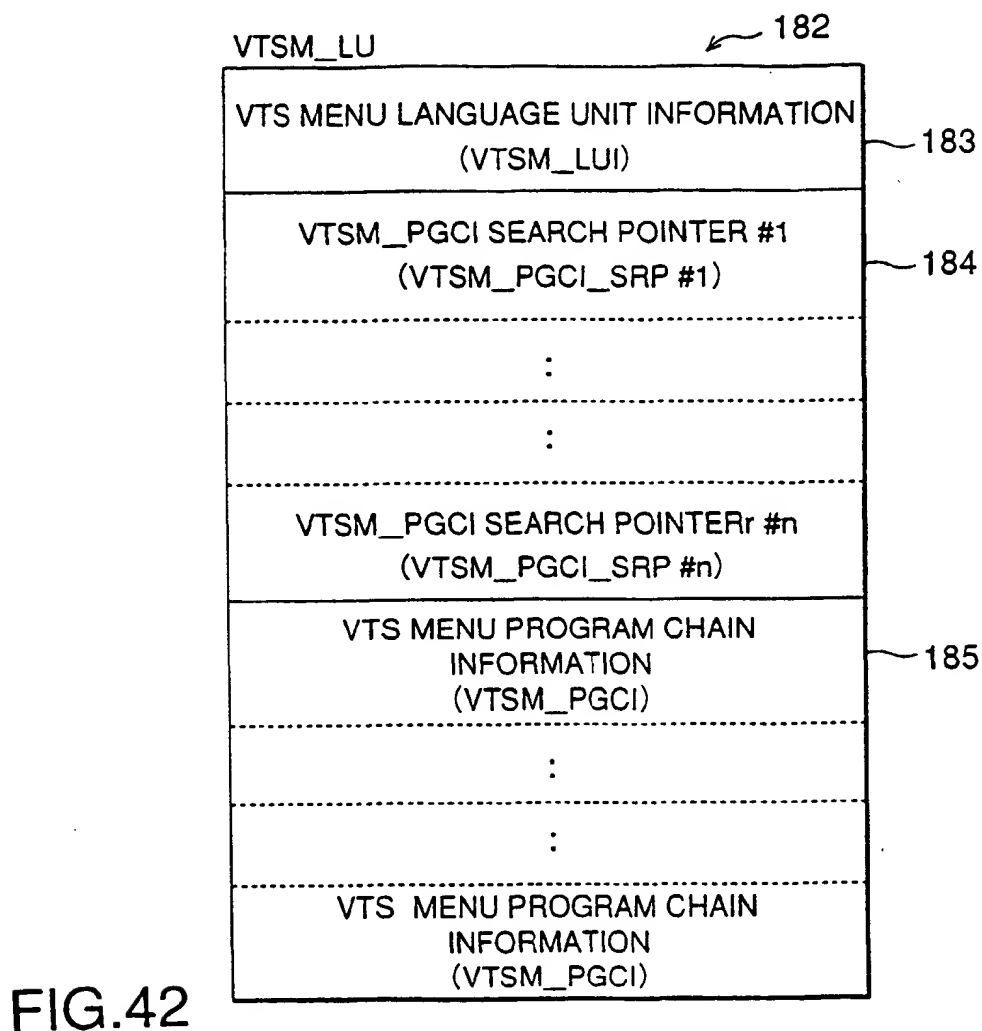


FIG.42

VTSM_LUI	
	CONTENTS
VTSM_PGC_Ns	NUMBER OF VTSM_PGCI_SRP <sub>s</sub>
VTSM_LU_EA	END ADDRESS OF VTSM_LU

FIG.43

VTSM_PGCI_SRP	
	CONTENTS
VTSM_PGC_CAT	VTSM_PGC CATEGORY
VTSM_PGCI_SA	START ADDRESS OF VTSM_PGCI

FIG.44

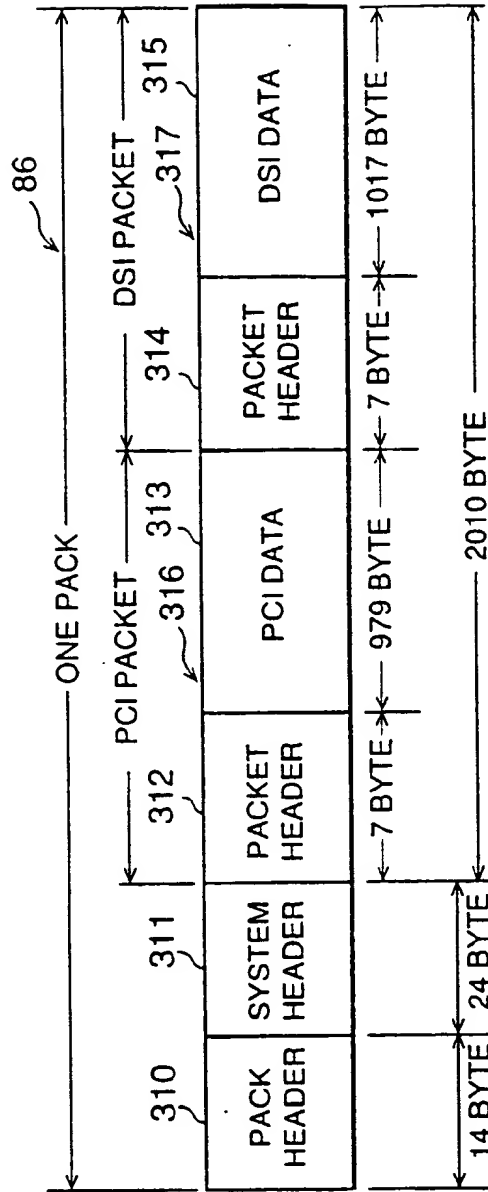


FIG. 45

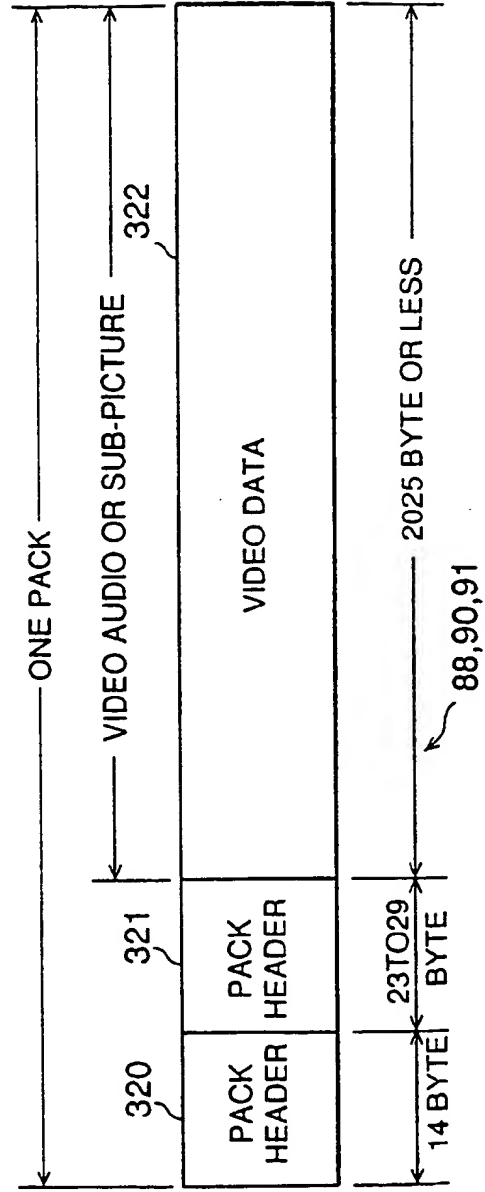


FIG. 46

FIG.47

PCI	
	CONTENT
PCI_GI	PCI GENERAL INFORMATION
NSMLS_ANGLI	ANGLE INFORMATION

FIG.48

PCI_GI	
	CONTENT
NV_PCK_LBN	LBN OF NV PACK
VOBU_CAT	CATEGORY OF VOB
VOBU_S_PTM	START PTM OF VOB
VOBU_E_PTM	END PTM OF VOB
VOBU_SE_E_PTM	END PTM OF SEQUENCE END IN VOB
C_ELT	CELL ELAPSE TIME

FIG.49

DSI	
	CONTENT
DSI_GI	DSI GENERAL INFORMATION
SML_PBI	SEAMLESS PLAYBACK INFORMATION
SML_AGLI	ANGLE INFORMATION
VOBU_SRI	VOB UNIT SEARCH INFORMATION
SYNCL	SYNCHRONOUS PLAYBACK INFORMATION

DSI_GI	
	CONTENT
NV_PCK_SCR	SCR OF NV PACK
NV_PCK_LBN	LBN OF NV PACK
VOBU_EA	VOBU END ADDRESS
VOBU_1STREF_EA	END ADDRESS OF THE FIRST REFERENCE PICTURE IN VOB
VOBU_2NDREF_EA	END ADDRESS OF THE SECOND REFERENCE PICTURE IN VOB
VOBU_3RDREF_EA	END ADDRESS OF THE THIRD REFERENCE PICTURE IN VOB
VOBU_VOB_IDN	VOBU ID NUMBER
VOBU_C_IDN	CELL ID NUMBER
C_ELT	CELL ELAPSE TIME

FIG.50

SYNCL	
	CONTENT
A_SYNCA 0 TO 7	TARGET AUDIO PACK ADDRESS
SP_SYNCA 0 TO 31	VOBU START ADDRESS FOR TARGET SP PACK

FIG.51

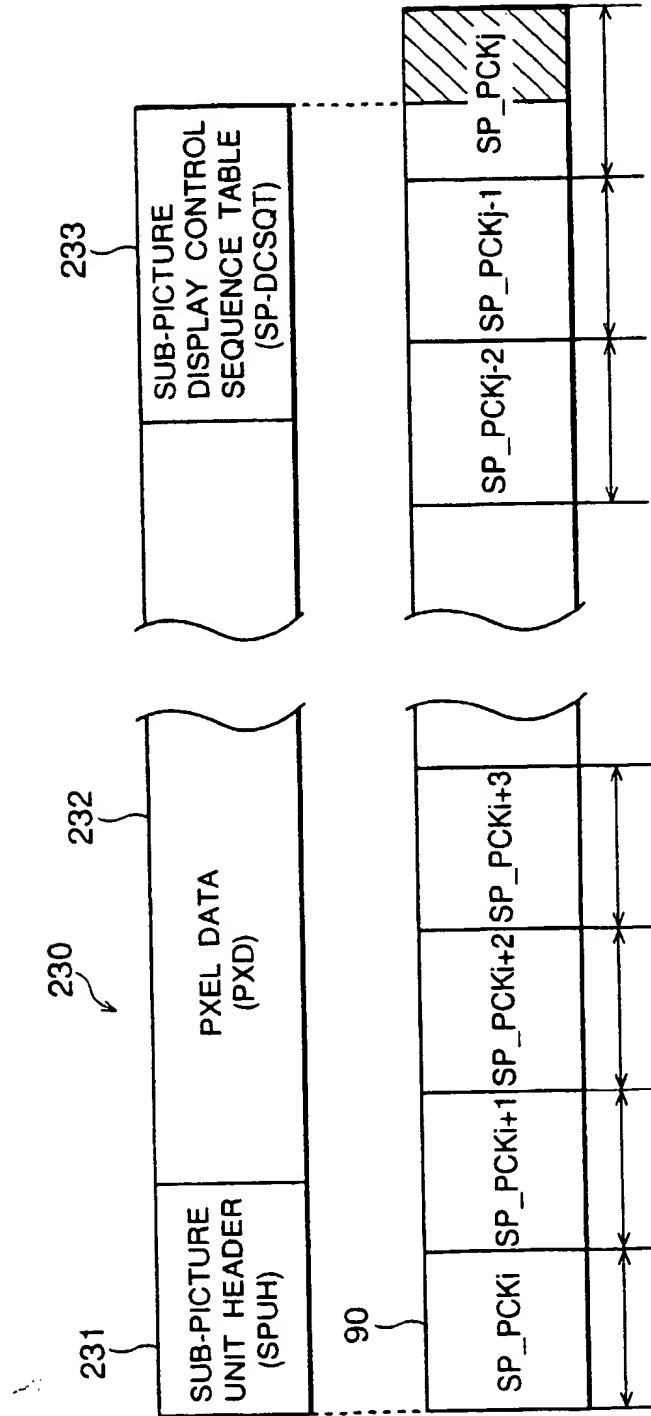


FIG.52

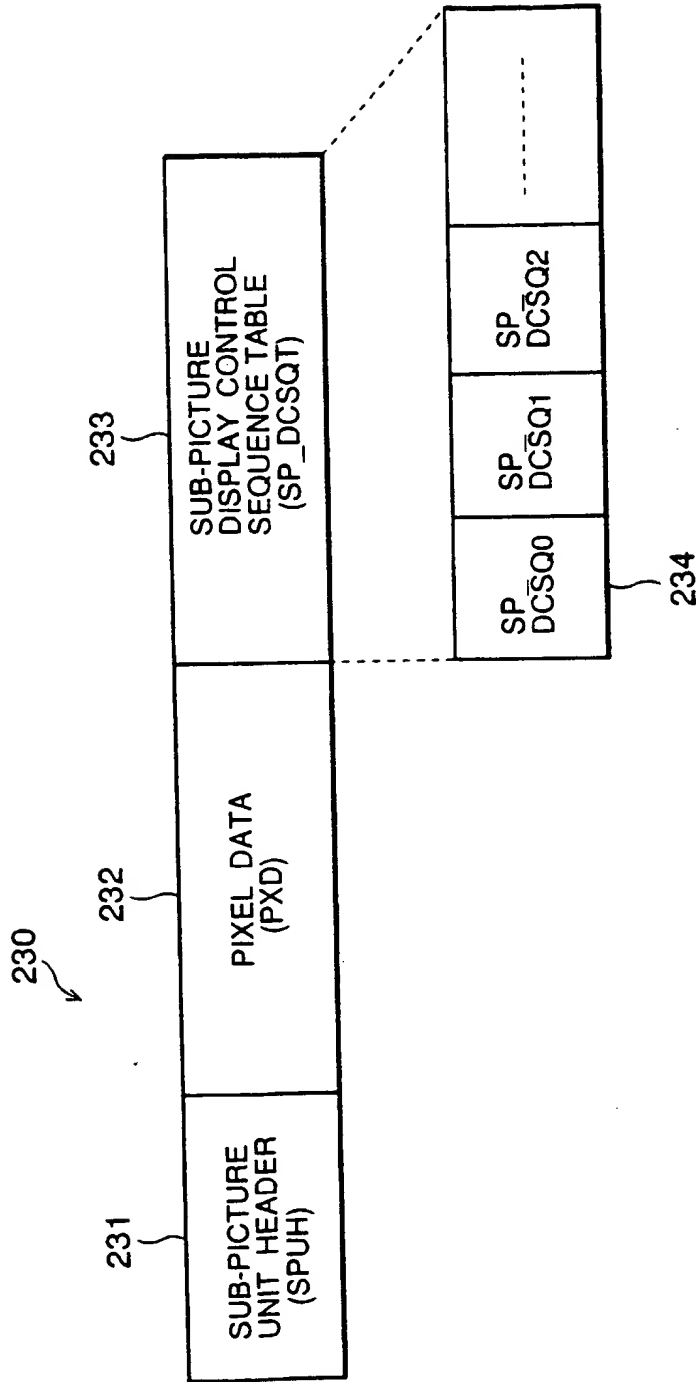


FIG.53

SPUH	CONTENT
SPDSZ	SIZE OF SUB-PICTURE UNIT
SPDCSQTA	START ADDRESS OF DISPLAY SEQUENCE TABLE

FIG.54

SP_DCSQ	CONTENT
SP_DCSQ_STM	START TIME OF SP_DCSQ
SP_NXT_DCSQ_SA	START ADDRESS OF THE NEXT SP_DCSQ
SP_DCCMD1	DISPLAY CONTROL COMMAND#1
⋮	⋮
SP_DCCMDn	DISPLAY CONTROL COMMAND#n

FIG.55

SP_DCCMD	
COMMAND NAME	CONTENTS
FSTA_DSP	FORCEDLY SETS DISPLAY START TIMING OF PIXEL DATA
STA_DSP	SETS DISPLAY START TIMING OF PIXEL DATA
STP_DSP	SETS DISPLAY STOP TIMING OF PIXEL DATA
SET_COLOR	SETS COLOR CODE OF PIXEL DATA
SET_CONTR	SETS CONTRAST BETWEEN PIXEL DATA AND MAIN PICTURE
SET_DAREA	SETS DISPLAY AREA OF PIXEL DATA
SET_DSPXA	SETS DISPLAY START ADDRESS OF PIXEL DATA
CHG_COLCON	SETS CHANGE OF COLOR AND CONTRAST FOR PIXEL DATA
CMD_END	END OF DISPLAY CONTROL COMMAND

FIG.56

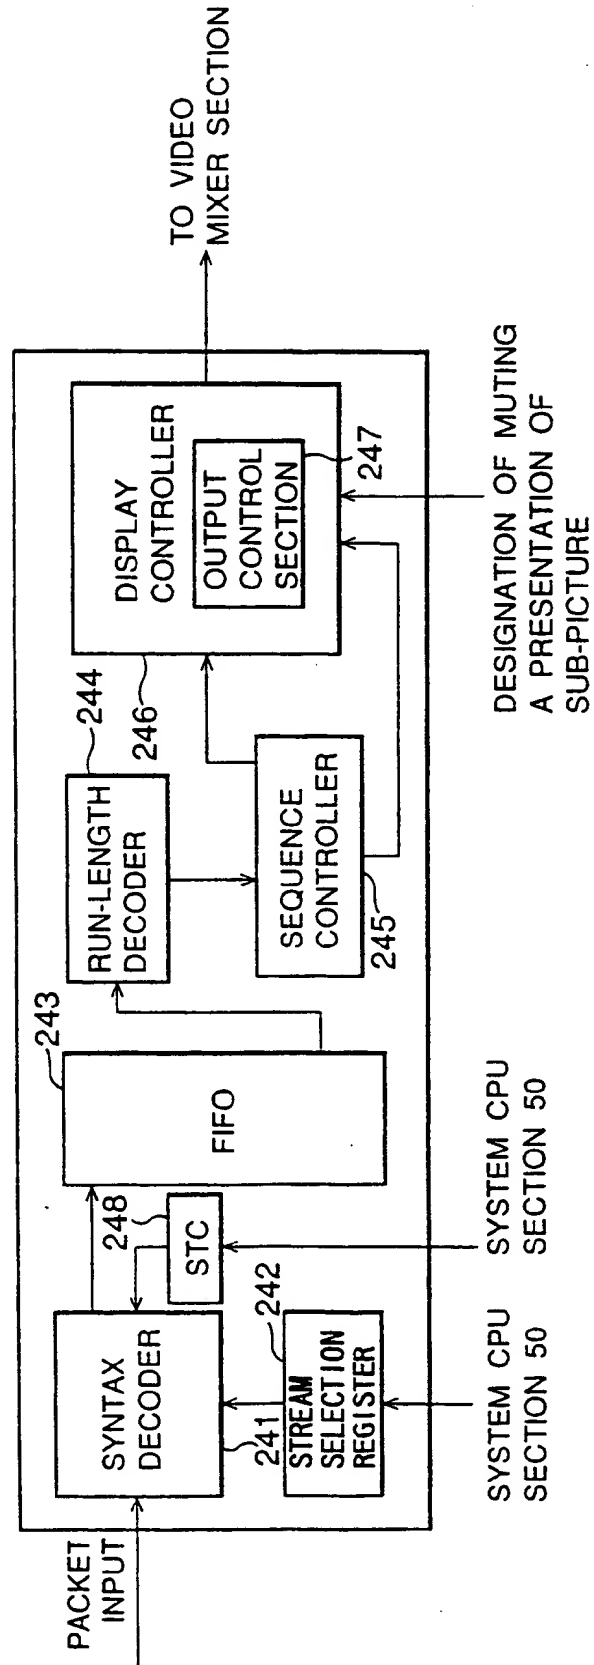


FIG.57



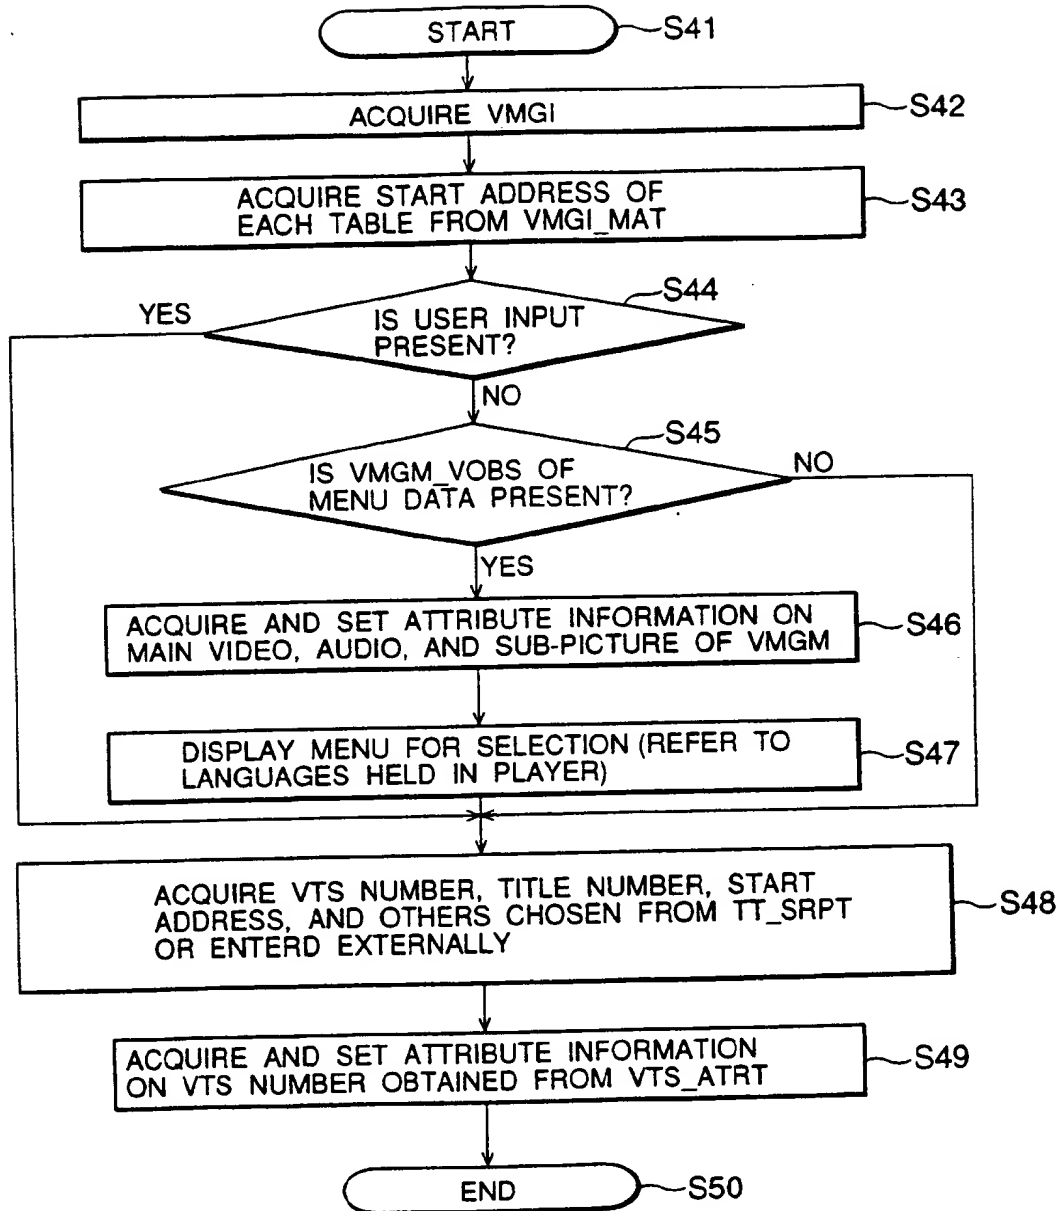


FIG.58

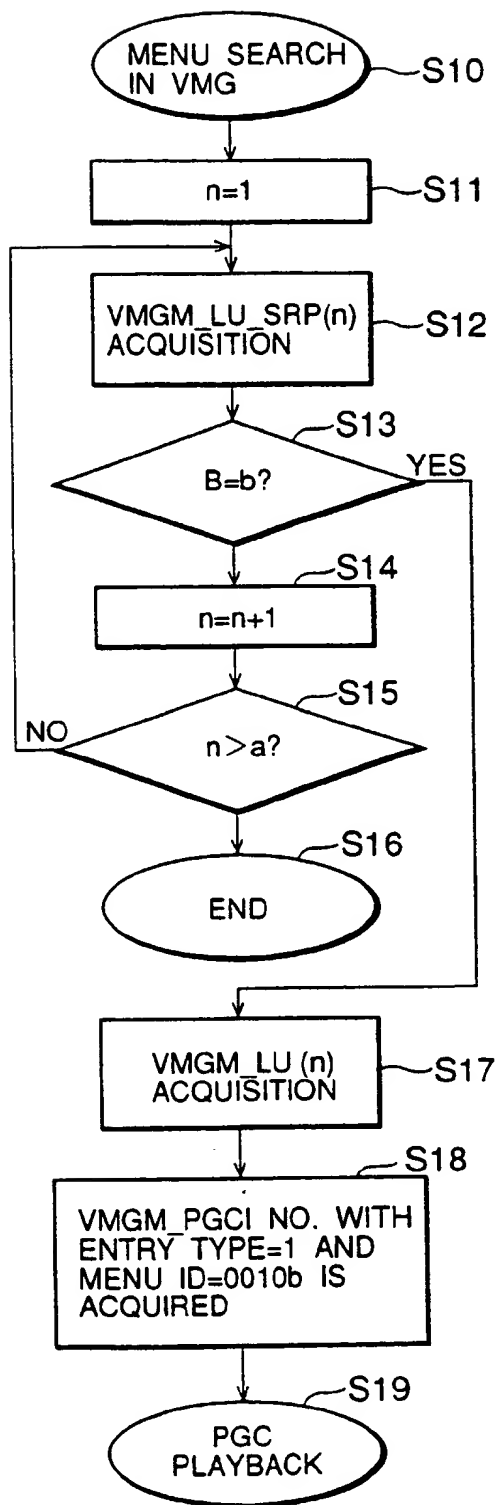


FIG.59

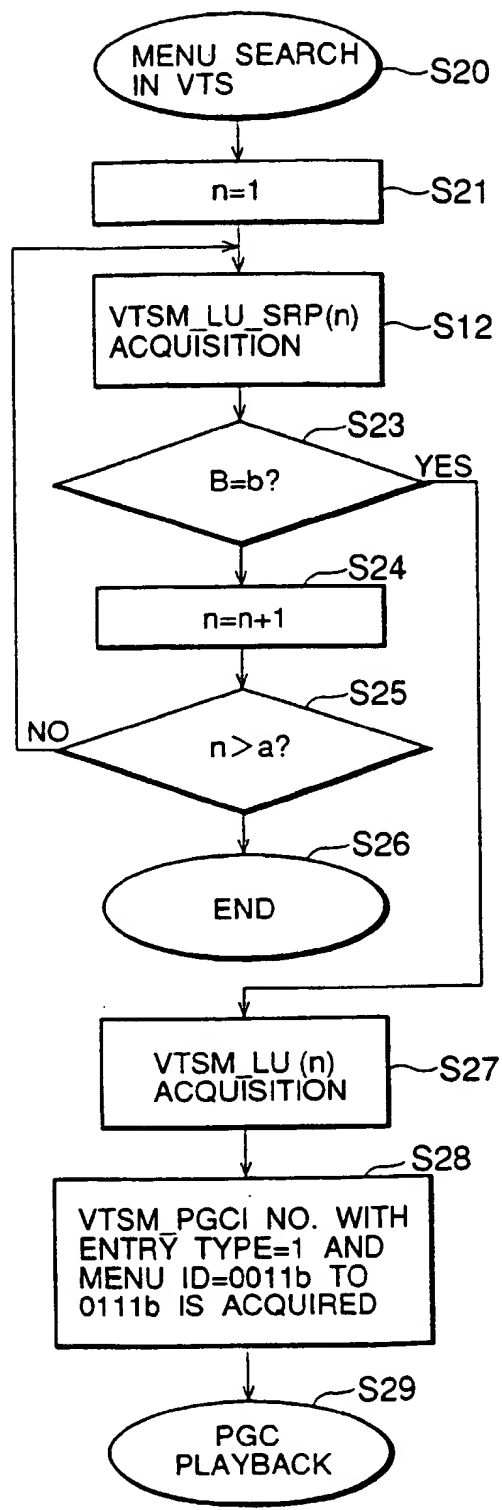


FIG.60

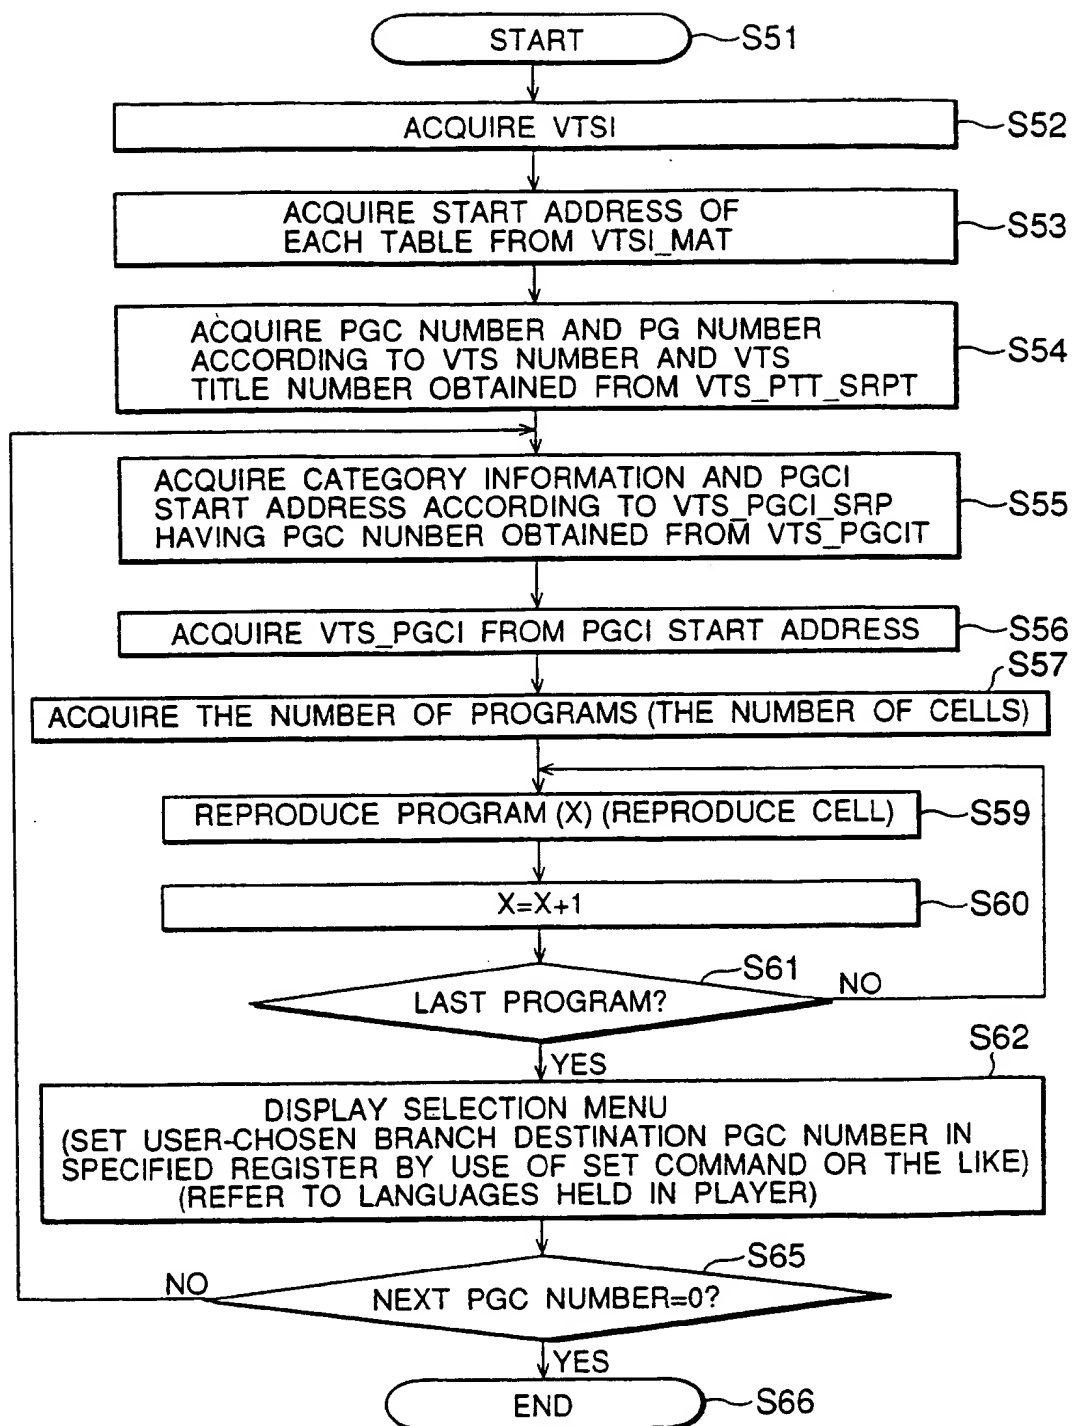


FIG.61

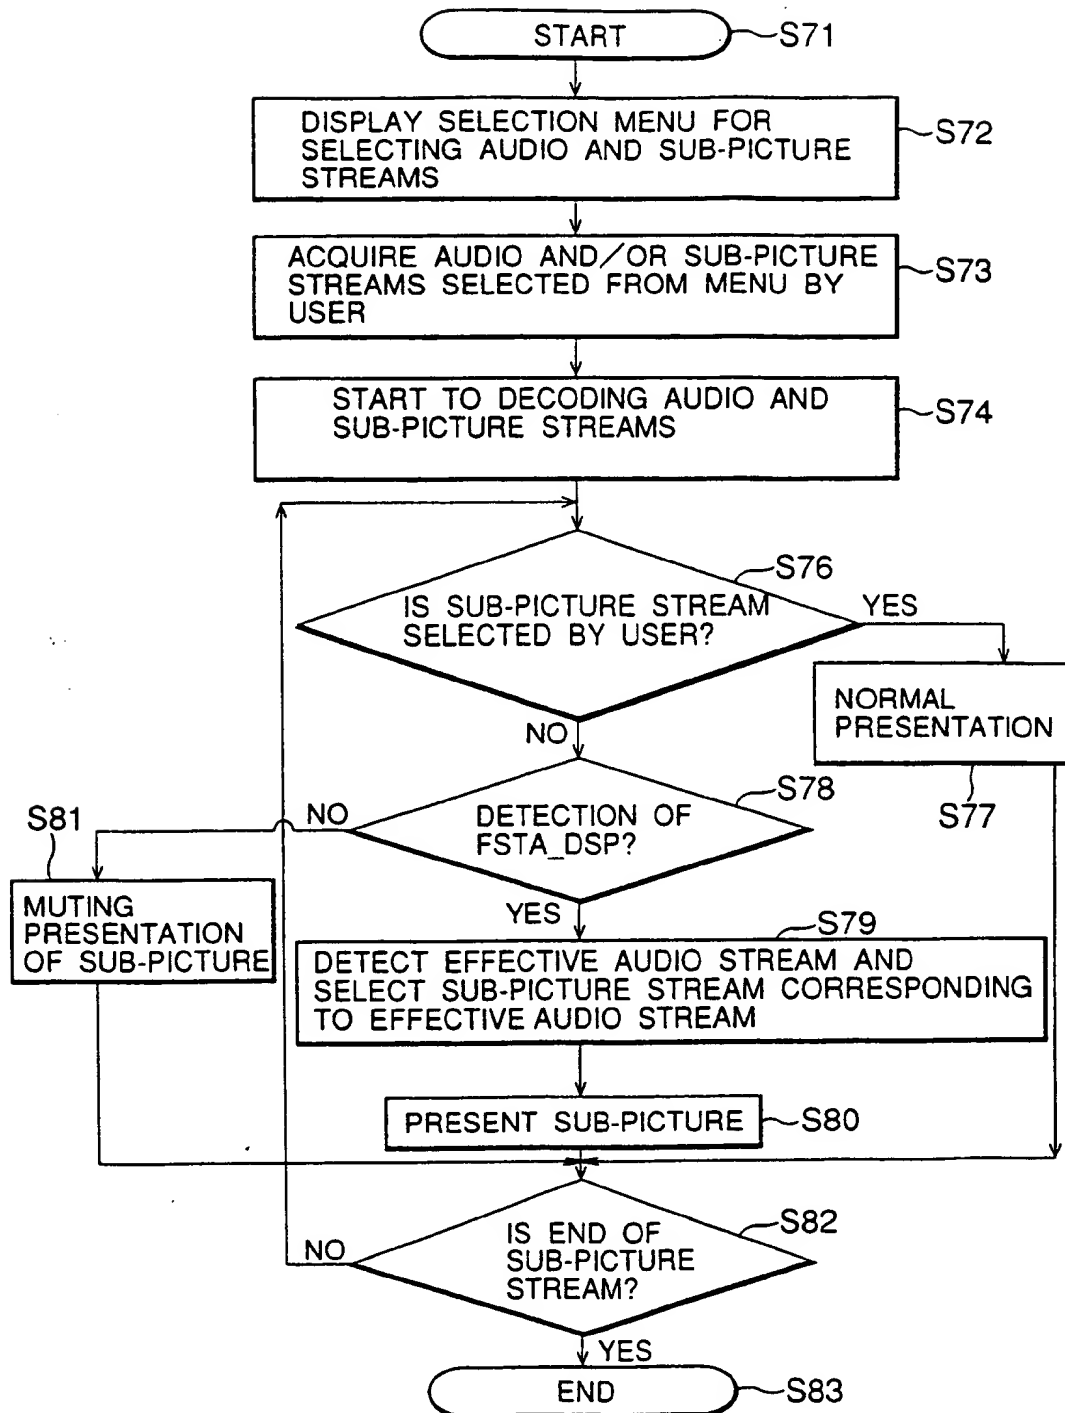


FIG.62

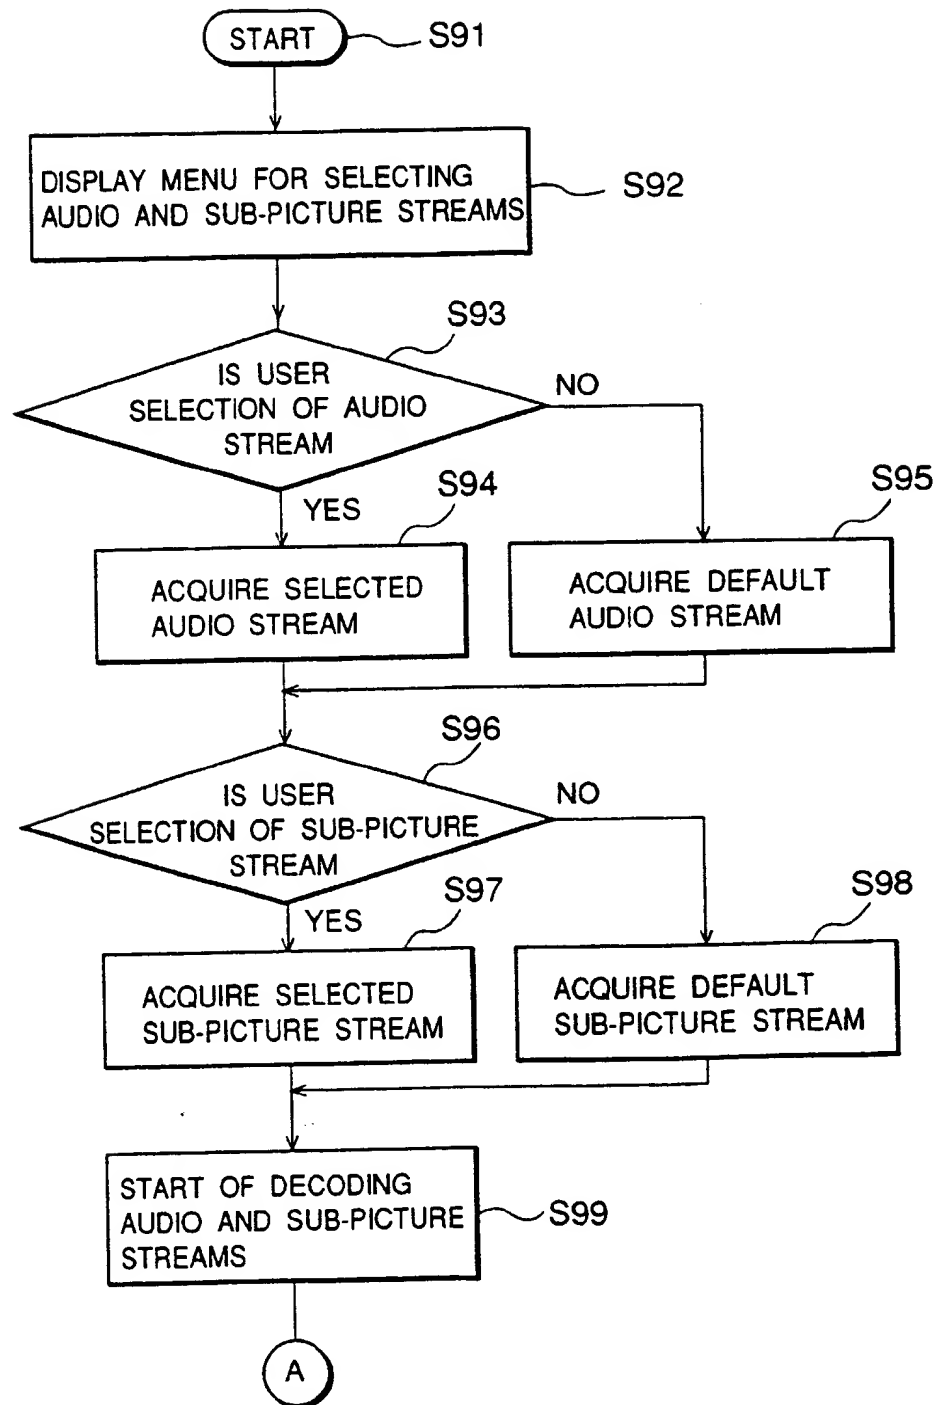


FIG. 63A

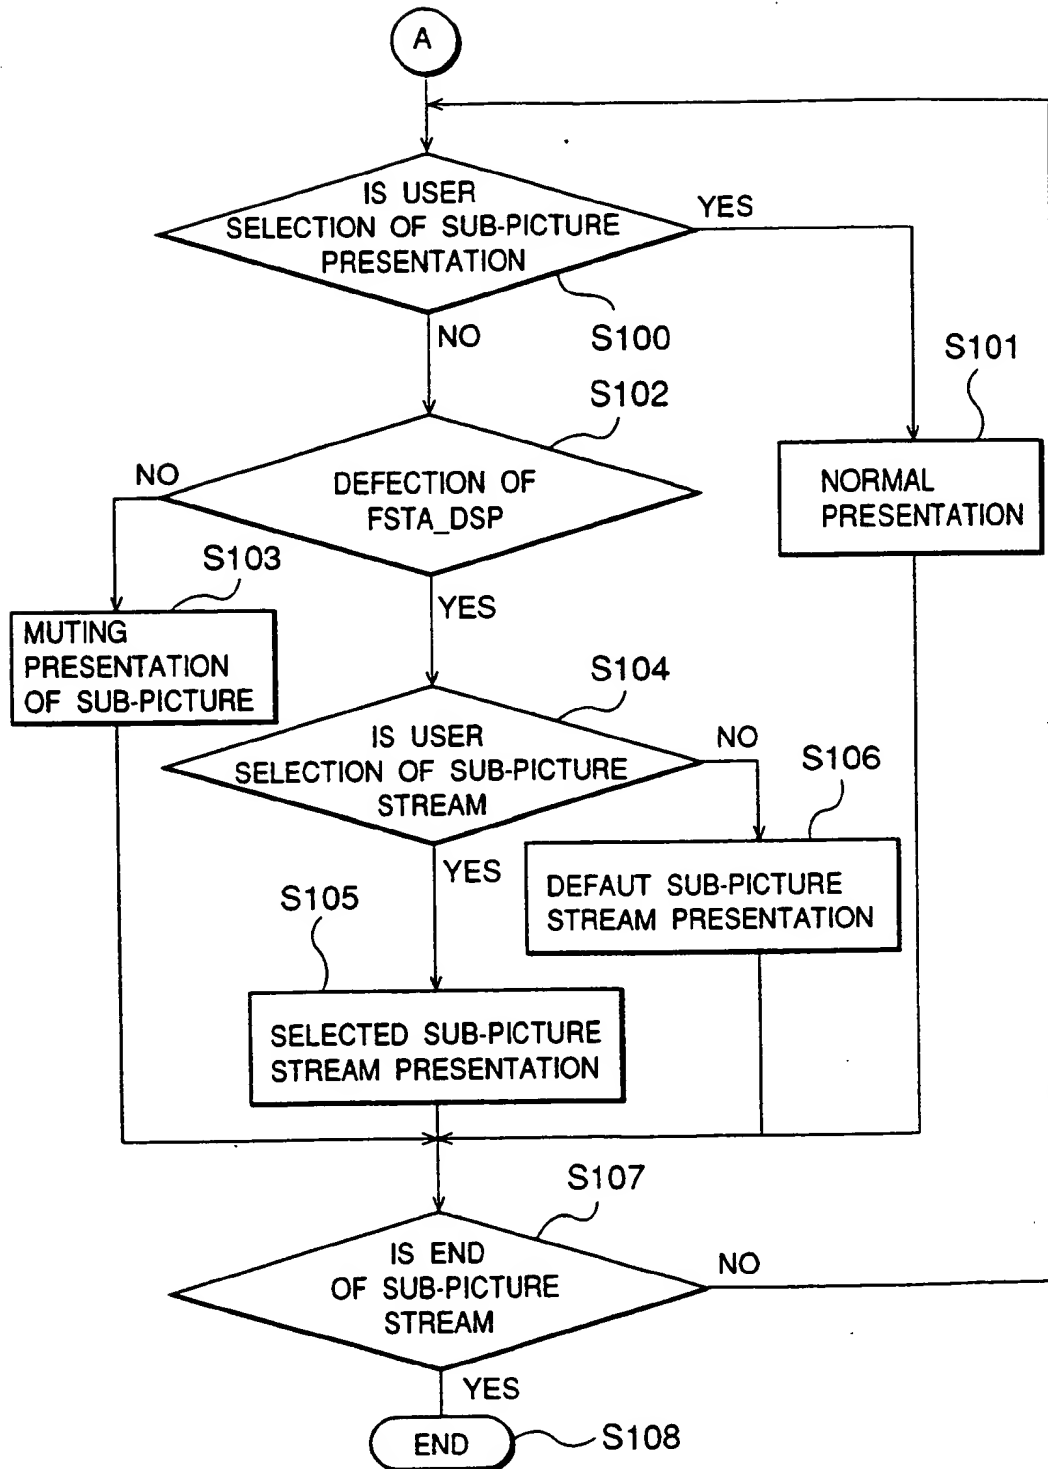


FIG.63B

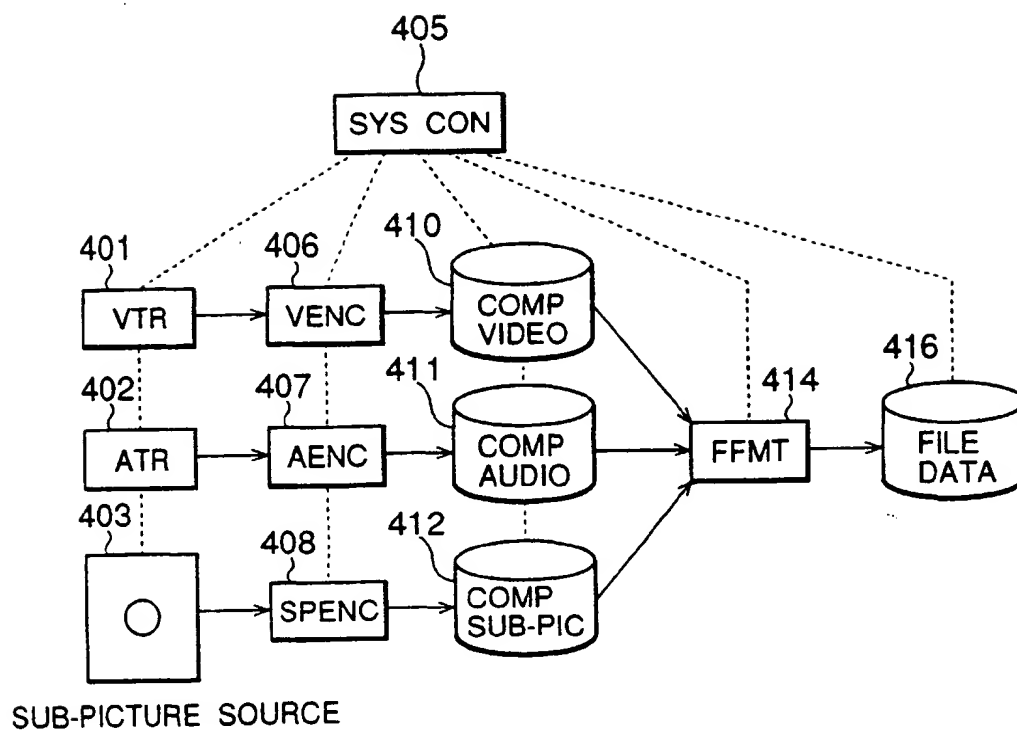


FIG.64

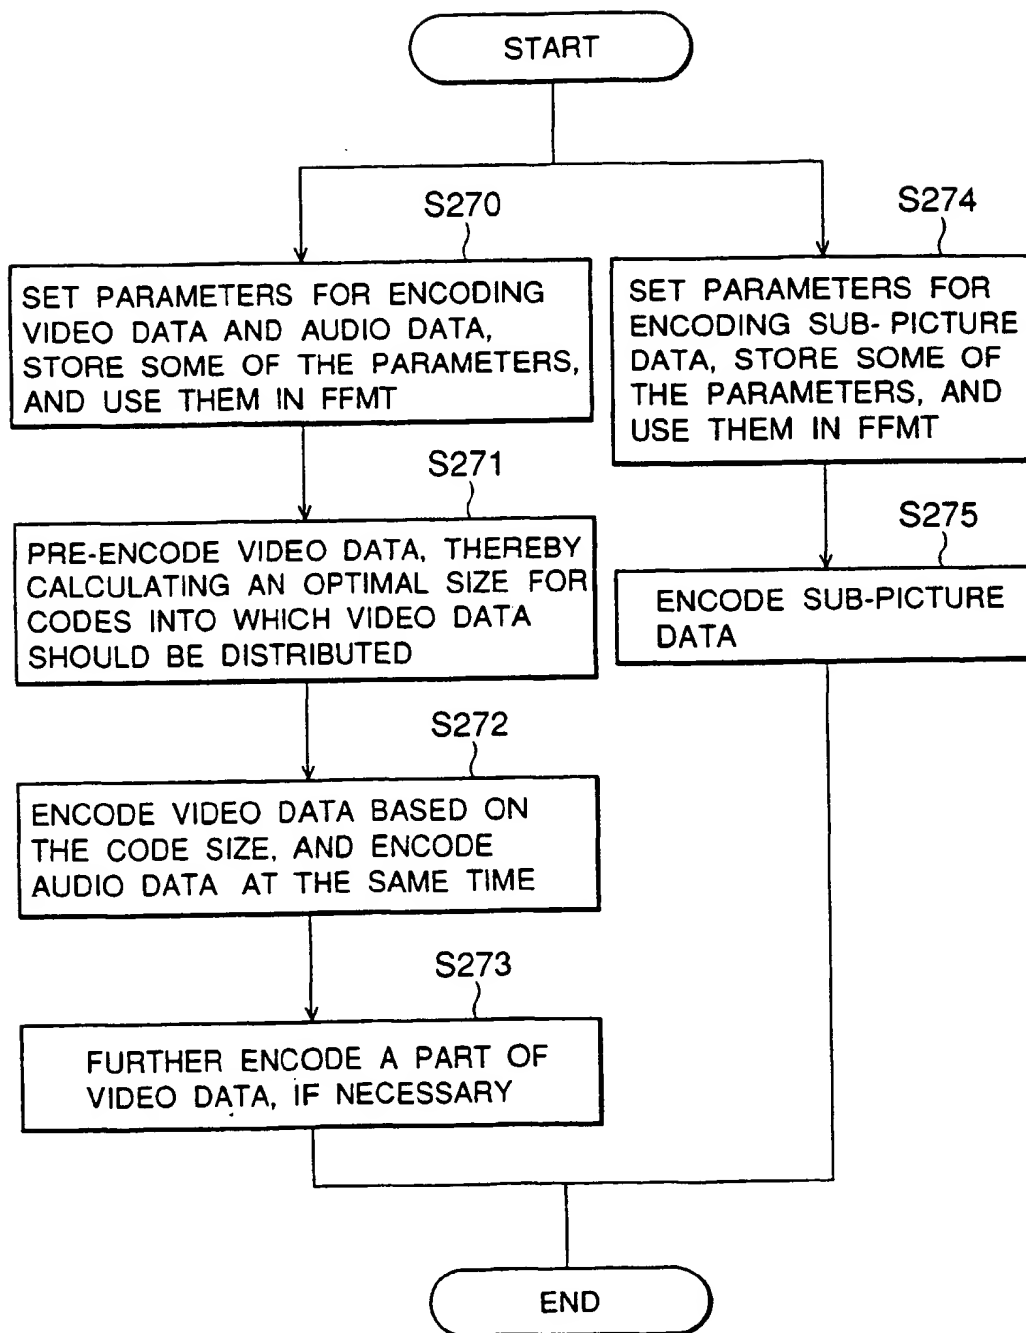


FIG.65



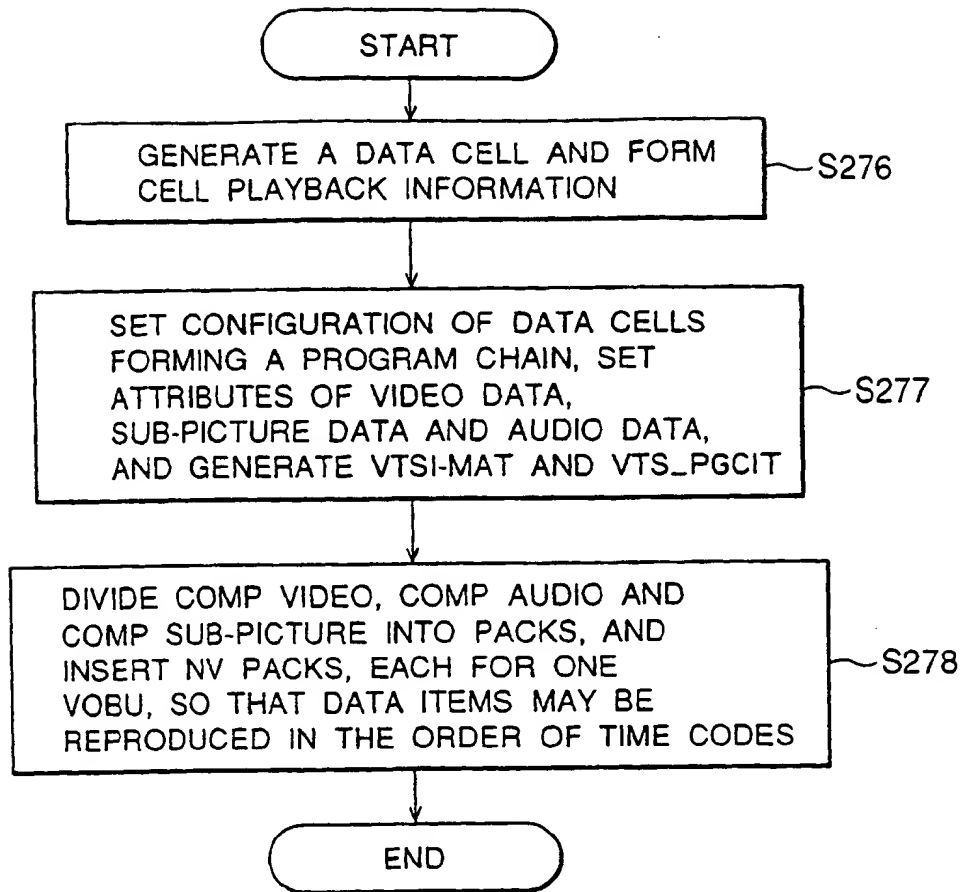


FIG.66

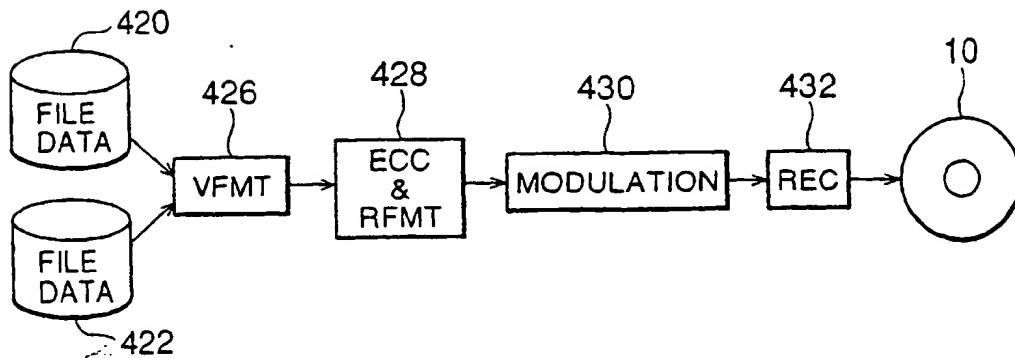


FIG.67

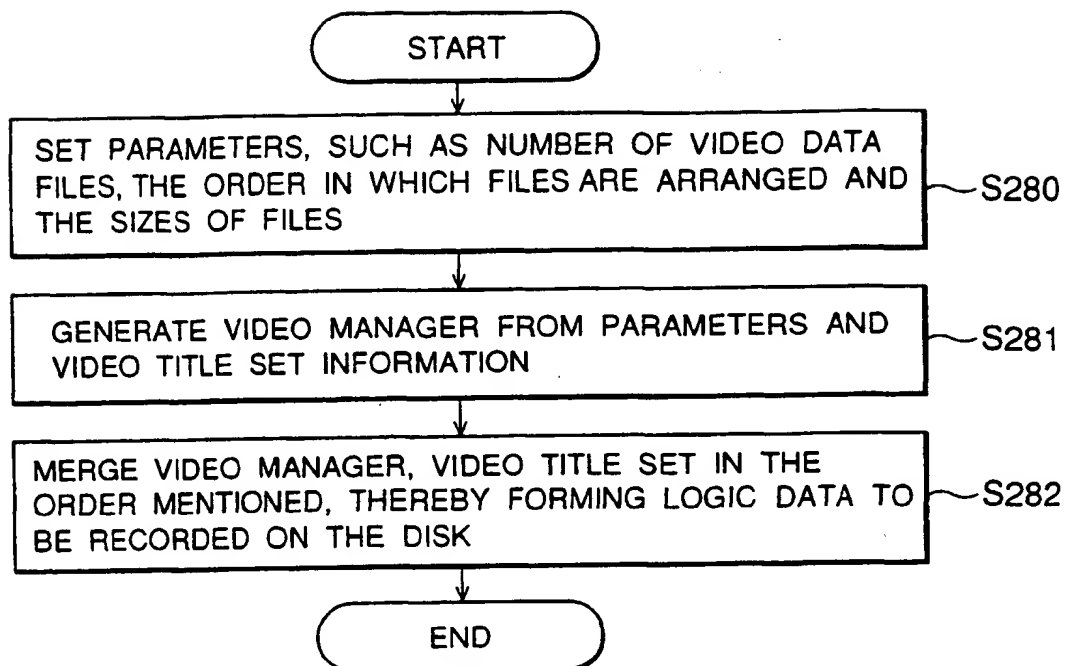


FIG.68

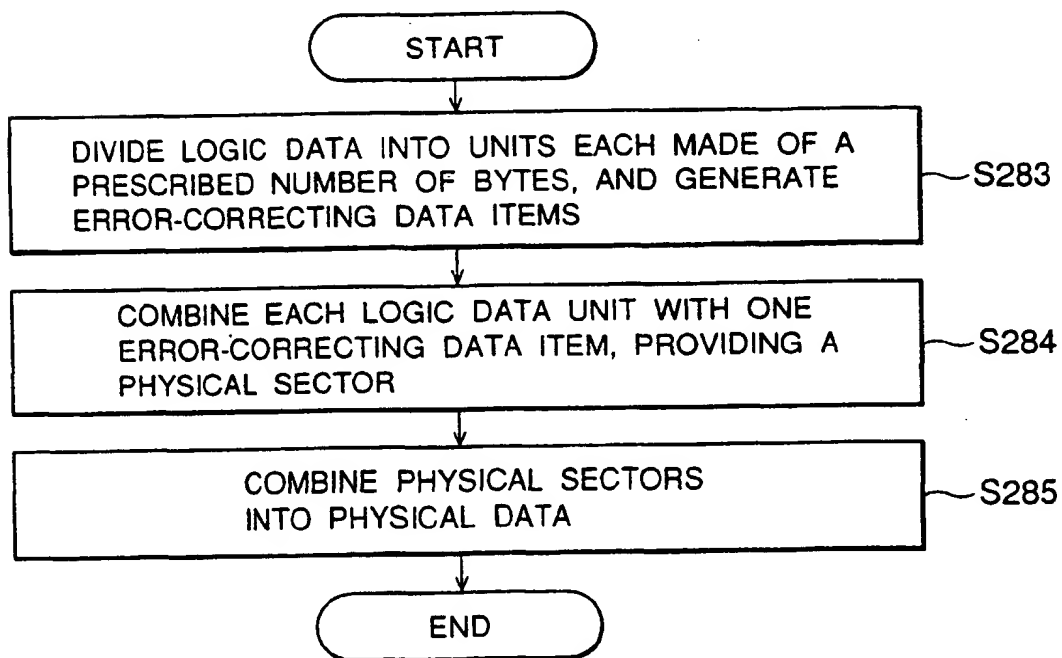


FIG.69

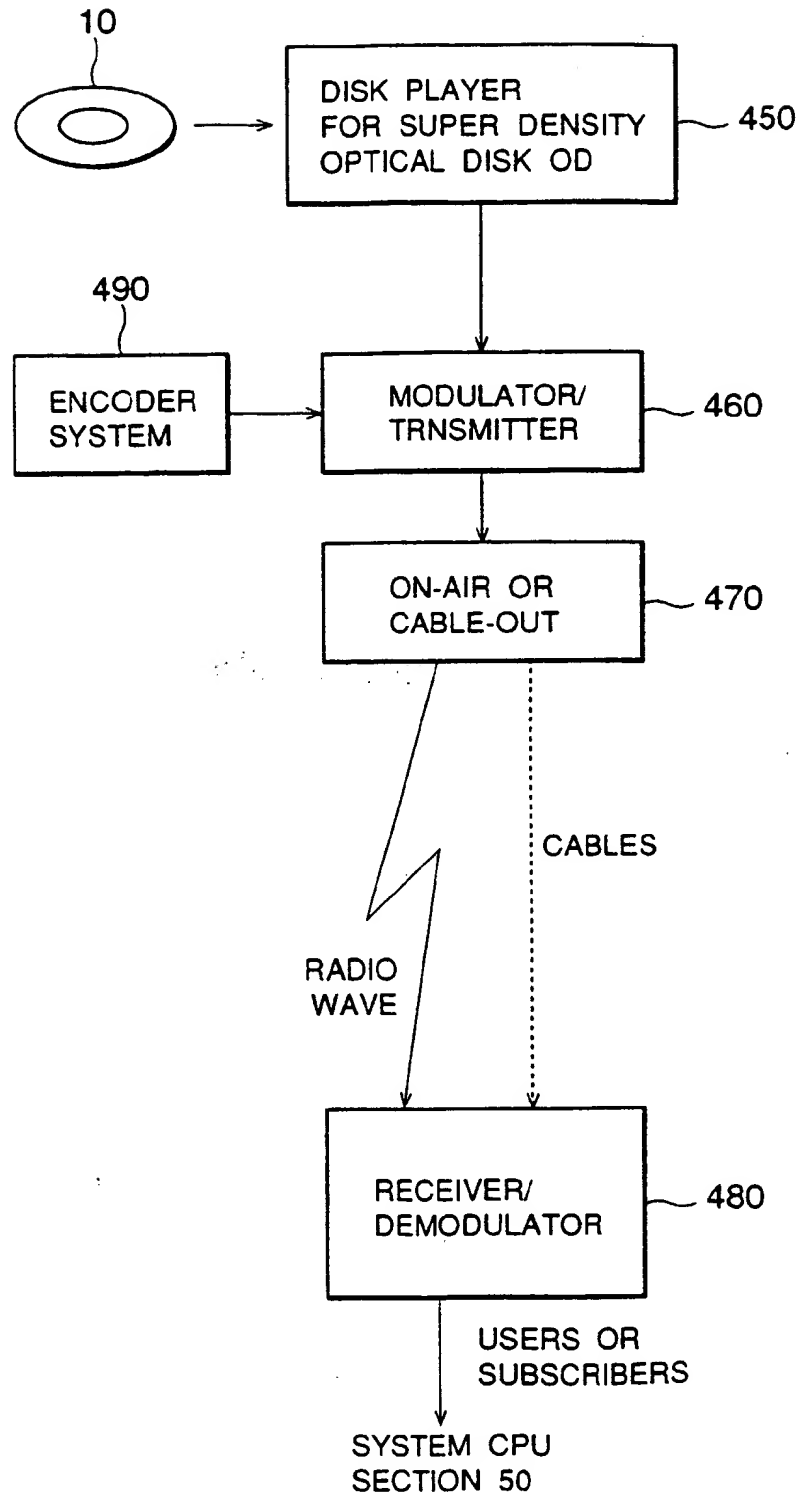


FIG.70

**This Page Blank (uspto)**

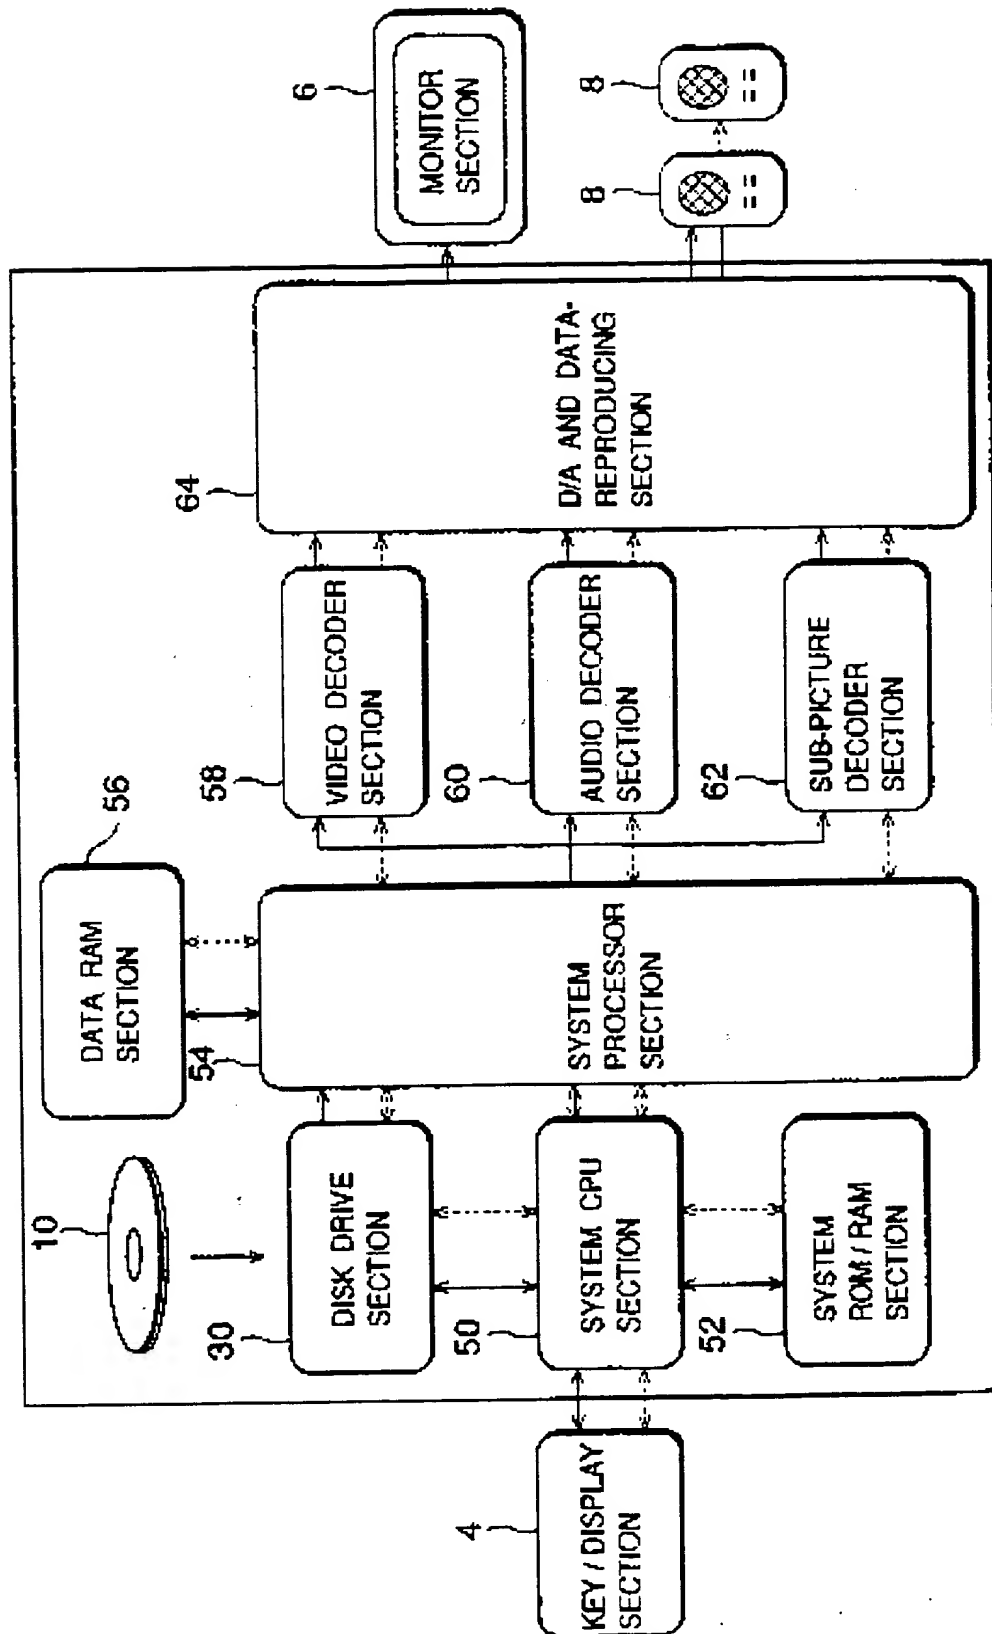


FIG.1

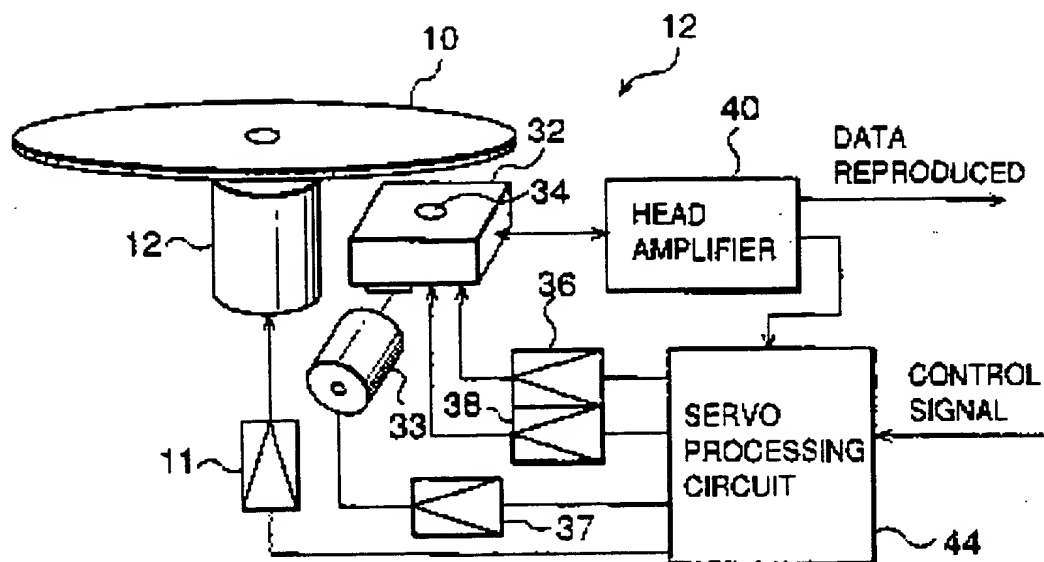


FIG.2

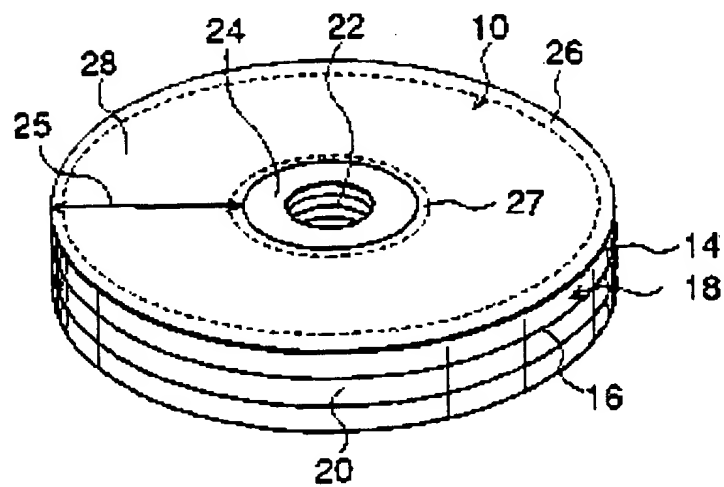


FIG.3

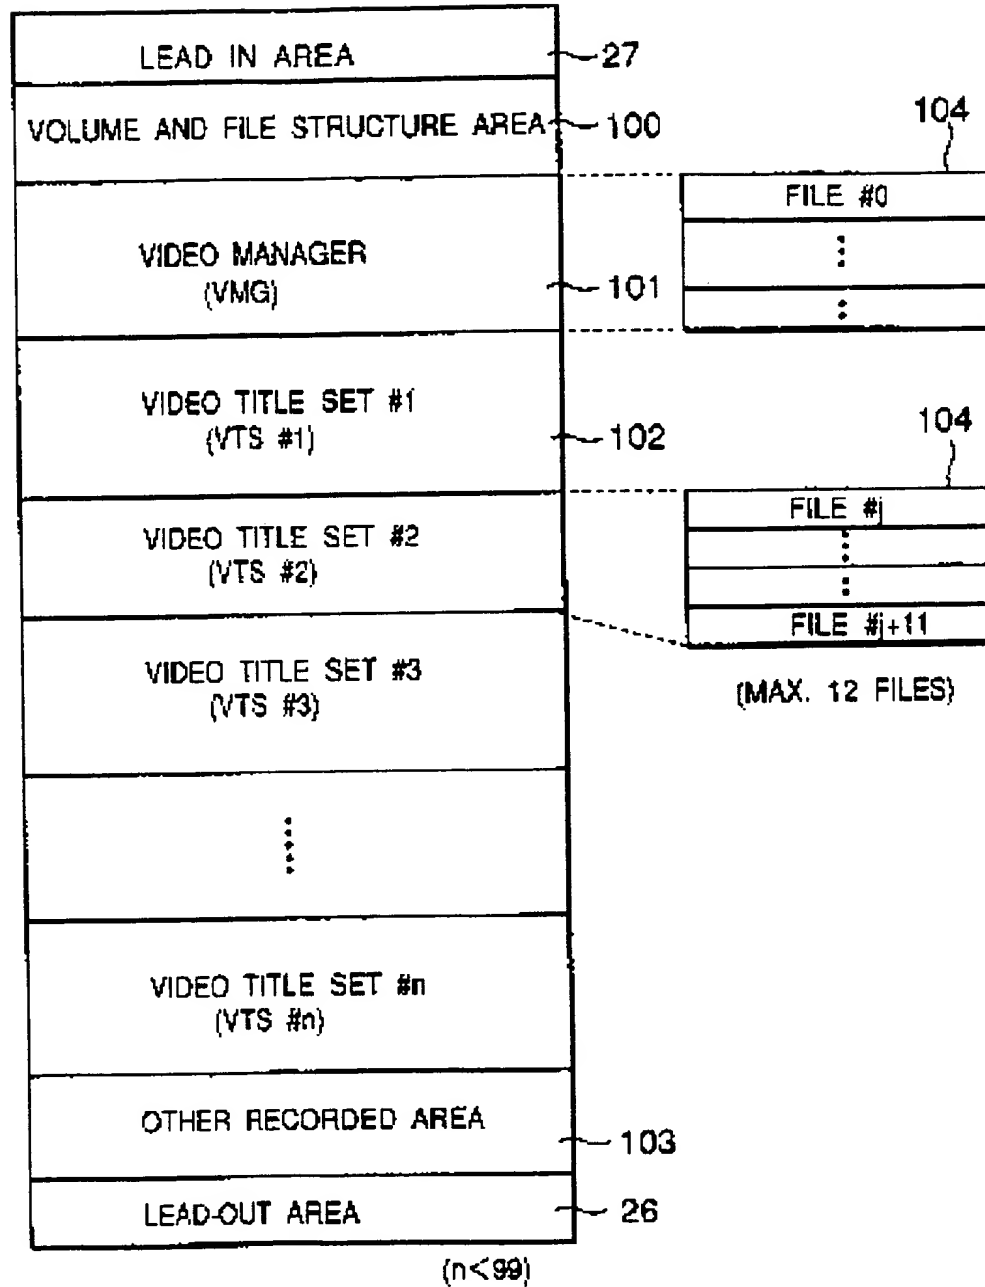


FIG.4

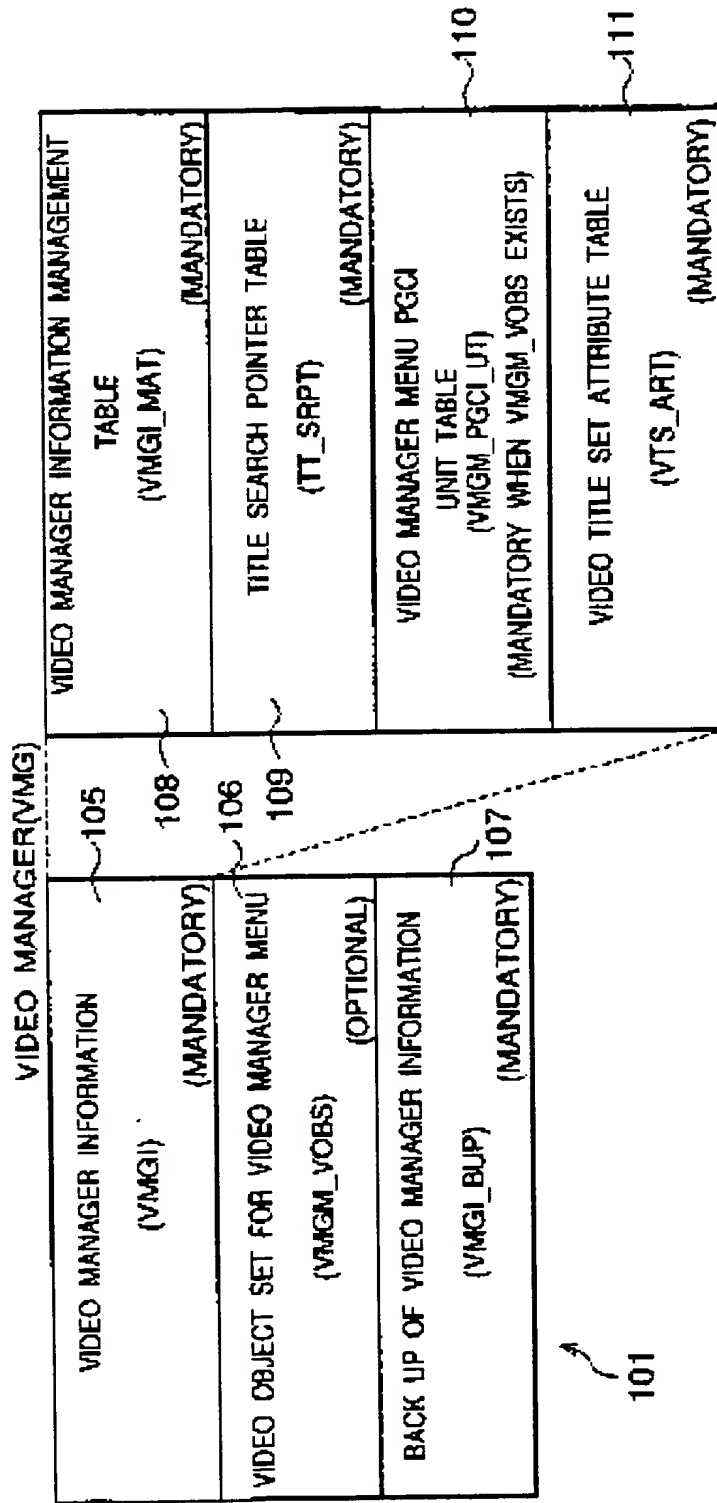


FIG.5




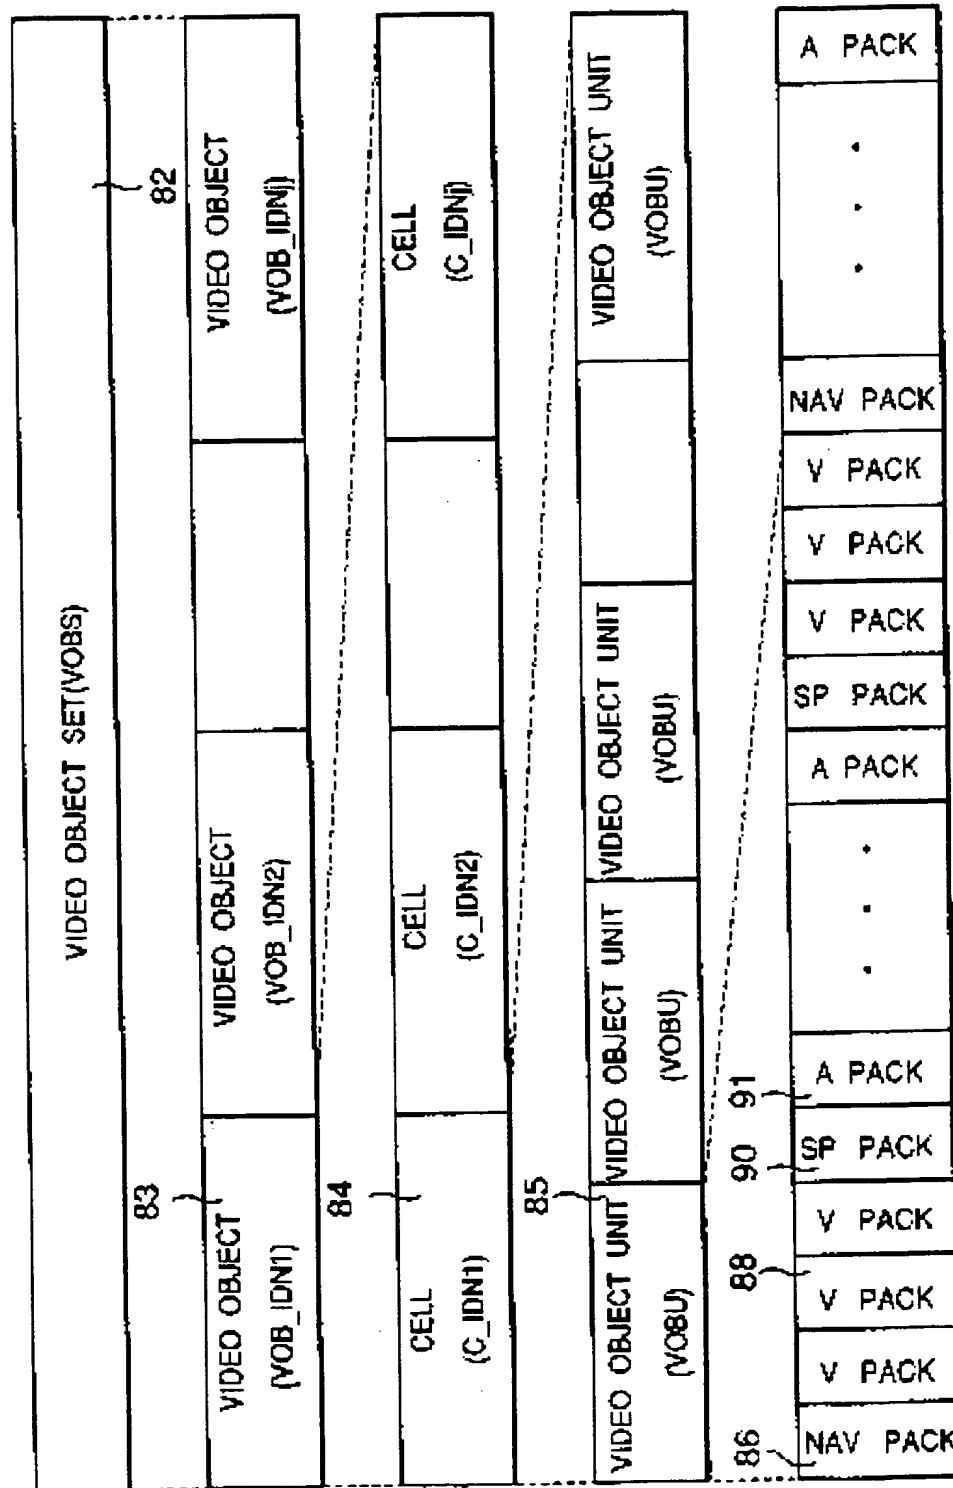


FIG.6

VMGI_MAT	(DESCRIPTION ORDER)
VMGI_MAT	CONTENT
VMGI_ID	VIDEO MANAGER IDENTIFIER
VMG_EA	END ADDRESS OF VMG
VMGI_EA	END ADDRESS OF VMGI
VERN	VERSION NUMBER OF DVD VIDEO SPECIFICATION
VMG_CAT	VIDEO MANAGER CATEGORY
VLMS_ID	VOLUME SET IDENTIFIER
VTS_Ns	NUMBER OF VIDEO TITLE SET
PVR_ID	PROVIDER UNIQUE ID
VMGI_MAT_EA	END ADDRESS OF VMGI_MAT
VMGM_VOBS_SA	VIDEO MANAGER MENU VIDEO OBJECT SET START ADDRESS
TT_SRPT_SA	START ADDRESS OF TT SRPT
VMGM_PGCI_UT_SA	START ADDRESS OF VMGM_PGCI_UT
VTS_ATRT_SA	START ADDRESS OF VTS_ATRT
VMGM_V_ATR	VIDEO ATTRIBUTE OF VMGM
VMGM_AST_Ns	NUMBER OF AUDIO STREAM OF VMGM
VMGM_AST_ATR	AUDIO STREAM ATTRIBUTE OF VMGM
VMGM_SPST_Ns	NUMBER OF SUB-PICTURE STREAM OF VMGM
VMGM_SPST_ATR	SUB-PICTURE STREAM ATTRIBUTE OF VMGM

FIG.7

TT\_SRPT

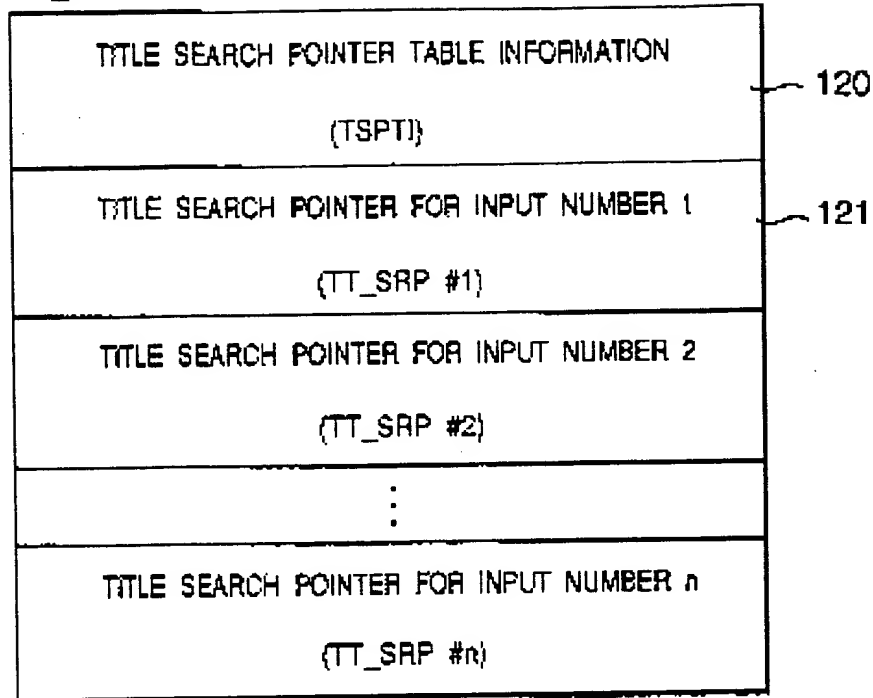

109

FIG.8

TT_SRPTI	(DESCRIPTION ORDER)
	CONTENTS
TT_SRP_Ns	NUMBERS OF TITLE SEARCH POINTERS
TT_SRPT_EA	END ADDRESS OF TT_SRPT

FIG.9

TT_SRP	(DESCRIPTION ORDER)
	CONTENTS
TT_PB_TY	TITLE PLAYBACK TYPE
AGL_Ns	NUMBER OF ANGLES
PTT_Ns	NUMBER OF PART OF TITLE
VTSN	VTS NUMBER
VTS_TTN	VTS TITLE NUMBER
VTS_SA	START ADDRESS OF VIDEO TITLE SET

FIG.10


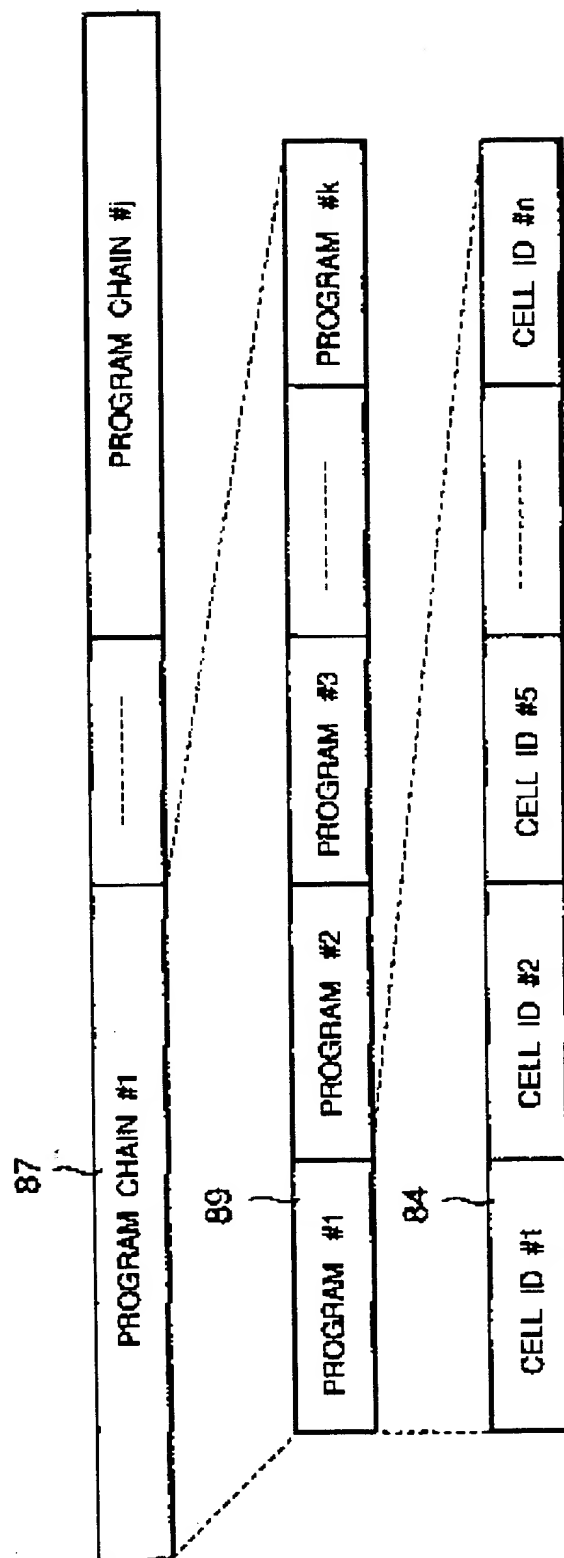


FIG.11

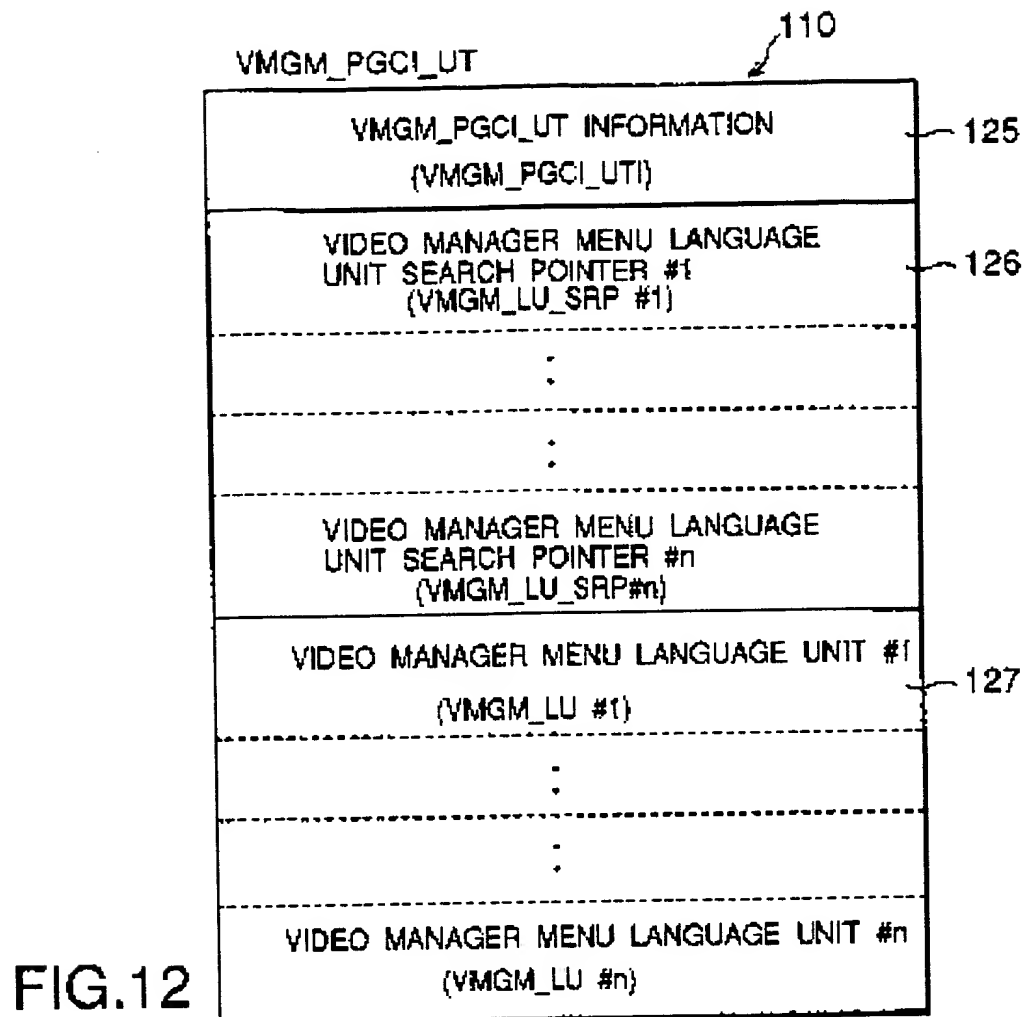

VMGM\_PGCI\_UTI


	CONTENTS
VMGM_LU_Ns	NUMBER OF VIDEO MANAGER MENU LANGUAGE UNITS
VMGM_PGCI_UT_EA	END ADDRESS OF VMGM_PGCI_UT

FIG.13

VMGM\_LU\_SRP

	CONTENTS
VMGM_LCD	VIDEO MANAGER MENU LANGUAGE CODE
VMGM_LU_SA	START ADDRESS OF VMGM_LU

FIG.14

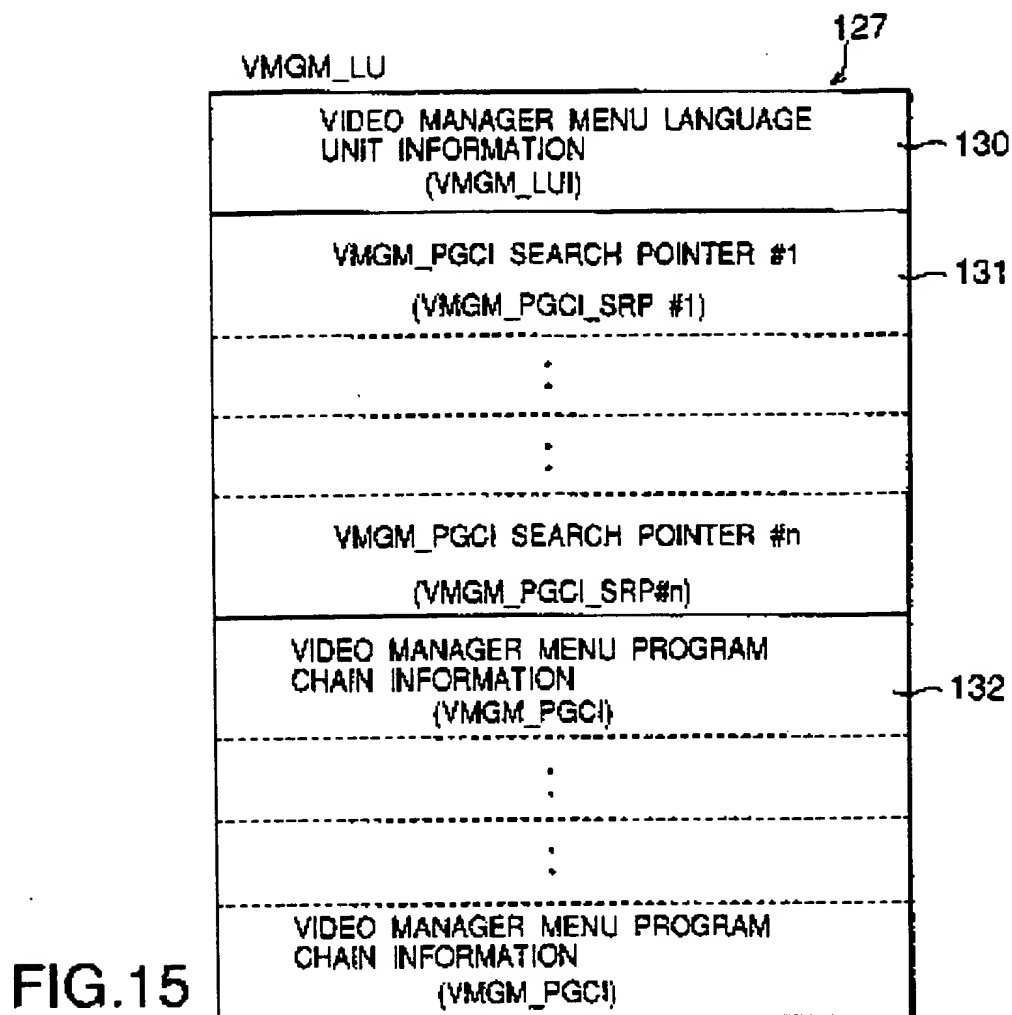

VMGM_LUI	
	CONTENTS
VMGM_PGC_SRP_Ns	NUMBER OF VMGM_PGC_SRPs
VMGM_LUI_EA	END ADDRESS OF VMGM_LUI.

FIG.16

VMGM_PGC_SRP	
	CONTENTS
VMGM_PGC-CAT	VMGM_PGC CATEGORY
VMGM_PGC_SA	START ADDRESS OF VMGM_PGC

FIG.17

VTS\_ATTRT

VIDEO TITLE SET ATTRIBUTE TABLE INFORMATION (VTS_ATTRTI)	133
VIDEO TITLE SET ATTRIBUTE SEARCH POINTER FOR VTS #1 (VTS_ATTR_SRP #1)	134
VIDEO TITLE SET ATTRIBUTE SEARCH POINTER FOR VTS #1 (VTS_ATTR_SRP #n)	
VIDEO TITLE SET ATTRIBUTE FOR VTS #1 (VTS_ATTR #1)	135
VIDEO TITLE SET ATTRIBUTE FOR VTS #n (VTS_ATTR #n)	

FIG.18

111

FIG.19

VTS_ATTRTI	
	CONTENTS
VTS_Nb	NUMBER OF VTSs
VTS_ATTRT_EA	END ADDRESS OF VTS_ATTRT

FIG.20

VTS_ATTR_SRP	
	CONTENTS
{1}VTS_ATTR_SA	START ADDRESS OF VTS_ATTR

FIG.21

VTS_ATTR	
	CONTENTS
VTS_ATTR_EA	END ADDRESS OF VTS_ATTR
VTS_CAT	VIDEO TITLE SET CATEGORY
VTS_ATTRI	VIDEO TITLE SET ATTRIBUTE INFORMATION

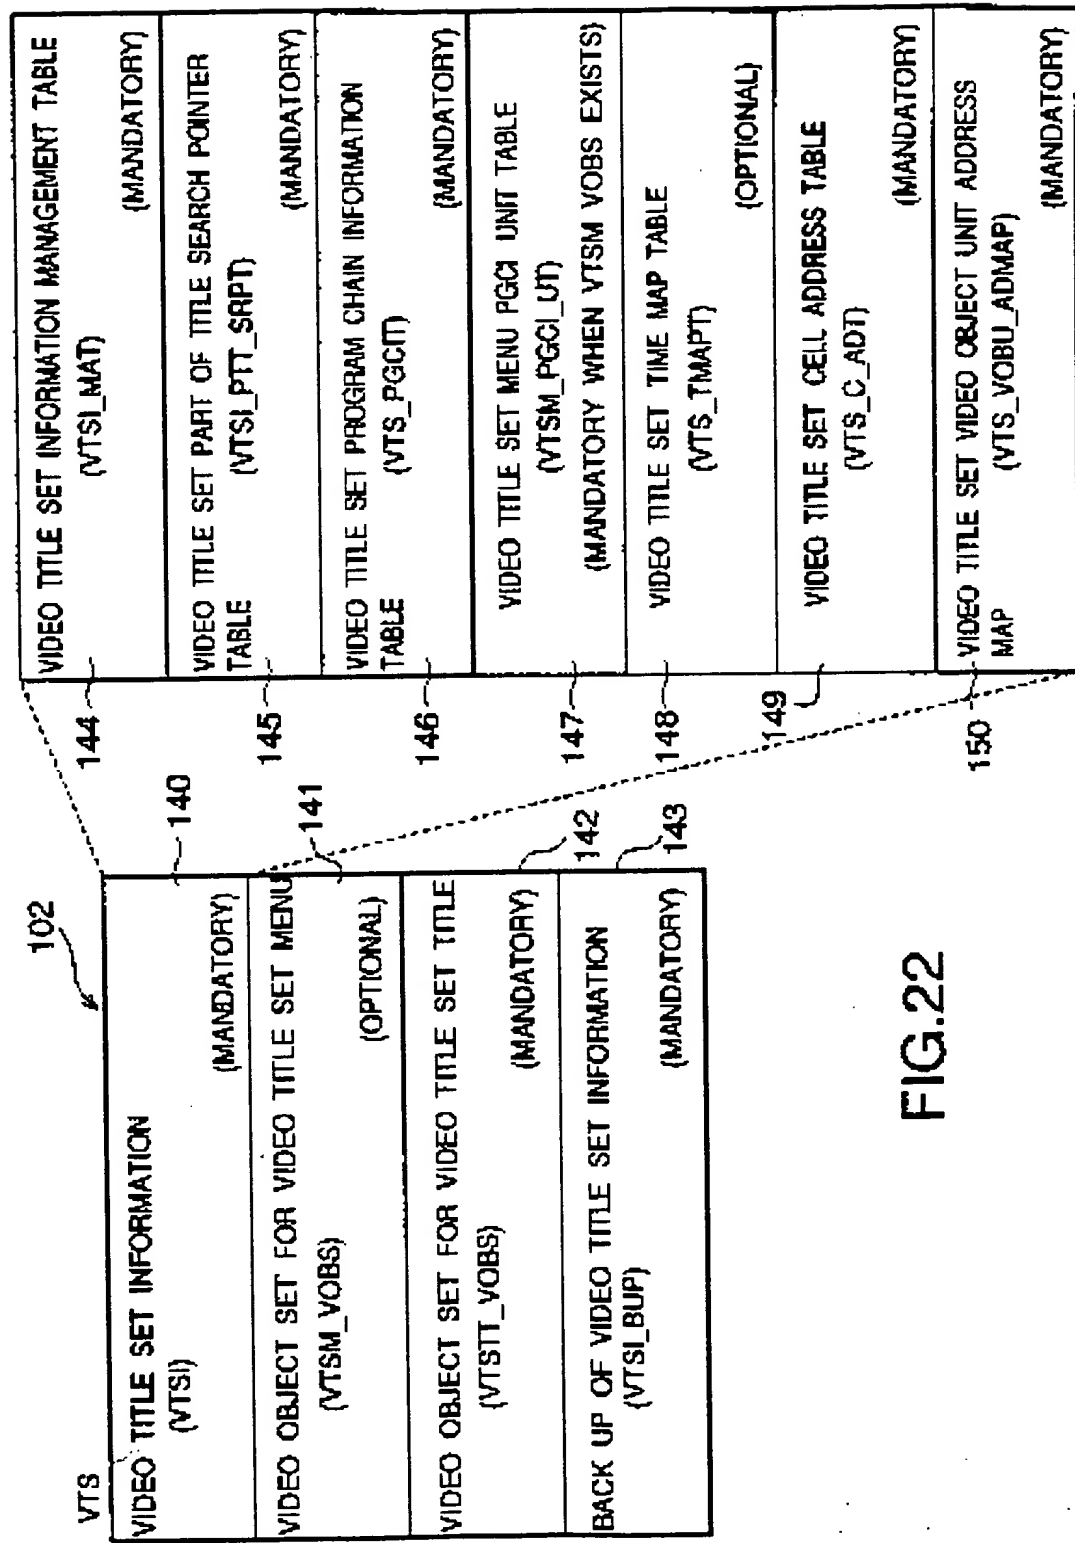


FIG.22



VTSL_MAT	CONTENTS
VTSL_ID	VTSL IDENTIFIER
VTSL_EA	END ADDRESS OF VTS
VTSL_EA	END ADDRESS OF VTSL
VERN	VERSION NUMBER OF DVD VIDEO SPECIFICATION
VTSL_CAT	VTSL CATEGORY
VTSL_MAT_EA	END ADDRESS OF VTSL_MAT
VTSM_VOBS_SA	START ADDRESS OF VTSM_VOBS
VTSTT_VOBS_SA	START ADDRESS OF VTSTT_VOBS
VTSL_PTT_SRPT_SA	START ADDRESS OF VTS_PTT_SRPT
VTSL_PGCIT_SA	START ADDRESS OF VTS_PGCIT
VTSM_PGCIT_UT_SA	START ADDRESS OF VTSM_PGCIT_UT
VTSL_TMAPT_SA	START ADDRESS OF VTS_TMAPT
VTSL_C_ADT_SA	START ADDRESS OF CELL ADDRESS TABLE
VTSL_VOBU_ADMAP_SA	START ADDRESS OF VOB ADDRESS MAP
VTSM_V_ATR	VIDEO ATTRIBUTE OF VTSM
VTSM_AST_Ns	NUMBER OF AUDIO STREAMS OF VTSM
VTSM_AST_ATR	AUDIO STREAMS ATTRIBUTE OF VTSM
VTSM_SPST_Ns	NUMBER OF SUB-PICTURE STREAMS OF VTSM
VTSM_SPST_ATR	SUB-PICTURE STREAMS ATTRIBUTE OF VTSM
VTSL_V_ATR	VIDEO ATTRIBUTE OF VTS
VTSL_AST_Ns	NUMBER OF AUDIO STREAMS OF VTS
VTSL_AST_ATR	AUDIO STREAM ATTRIBUTE OF VTS
VTSL_SPST_Ns	NUMBER OF SUB-PICTURE STREAMS OF VTS
VTSL_SPST_ATR	SUB-PICTURE STREAM ATTRIBUTE OF VTS
VTSL_MU_AST_ATR	MULTICHANNEL AUDIO STREAM ATTRIBUTE OF VTS

FIG.23

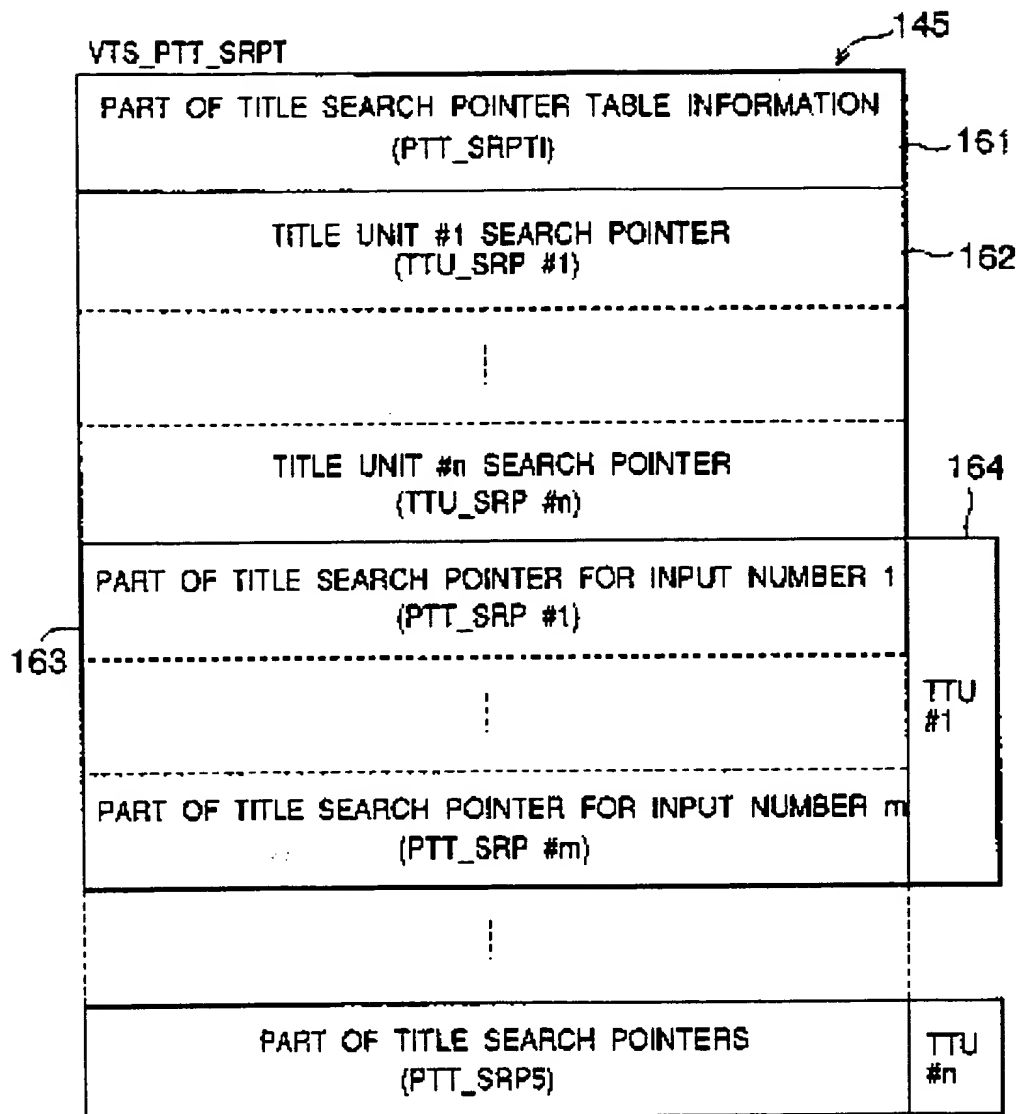


FIG.24

FIG.25

PTT_SRPTI	
	CONTENTS
VTS_TTU_Ns	NUMBER OF TTU IN VTS
VTS_PTT_SRPT_EA	END ADDRESS OF VTS PTT SRPT

FIG.26

TTU_SRP	
	CONTENTS
(1)TTU_SA	START ADDRESS OF TTU

FIG.27

PTT_SRP	
	CONTENTS
PGC_N	PROGRAM CHAIN NUMBER
PG_N	PROGRAM NUMBER

VTS\_PGCIT

VIDEO TITLE SET PROGRAM CHAIN INFORMATION TABLE INFORMATION (VTS_PGCIT_I)	172
VTS_PGCI #1 SEARCH POINTER (VTS_PGCIT_SRP #1)	173
VTS_PGCI #2 SEARCH POINTER (VTS_PGCIT_SRP #2)	
:	
VTS_PGCI #n SEARCH POINTER (VTS_PGCIT_SRP #n)	
VTS_PGCI (VTS_PGCI)	174
:	
VTS_PGCI (VTS_PGCI)	

146

FIG.28

VTS\_PGCIT\_I

(DESCRIPTION ORDER)

	CONTENT
VTS_PGC_Ns	NUMBER OF VTS_PGCs
VTS_PGCIT_EA	END ADDRESS OF VTS_PGCI

FIG.29

VTS\_PGCIT\_SRP

(DESCRIPTION ORDER)

	CONTENT
VTS_PGC_CAT	VIDEO TITLE SET PGC CATEGORY
VTS_PGCI_SA	START ADDRESS OF VTS_PGCI

FIG.30

VTS\_PGCI

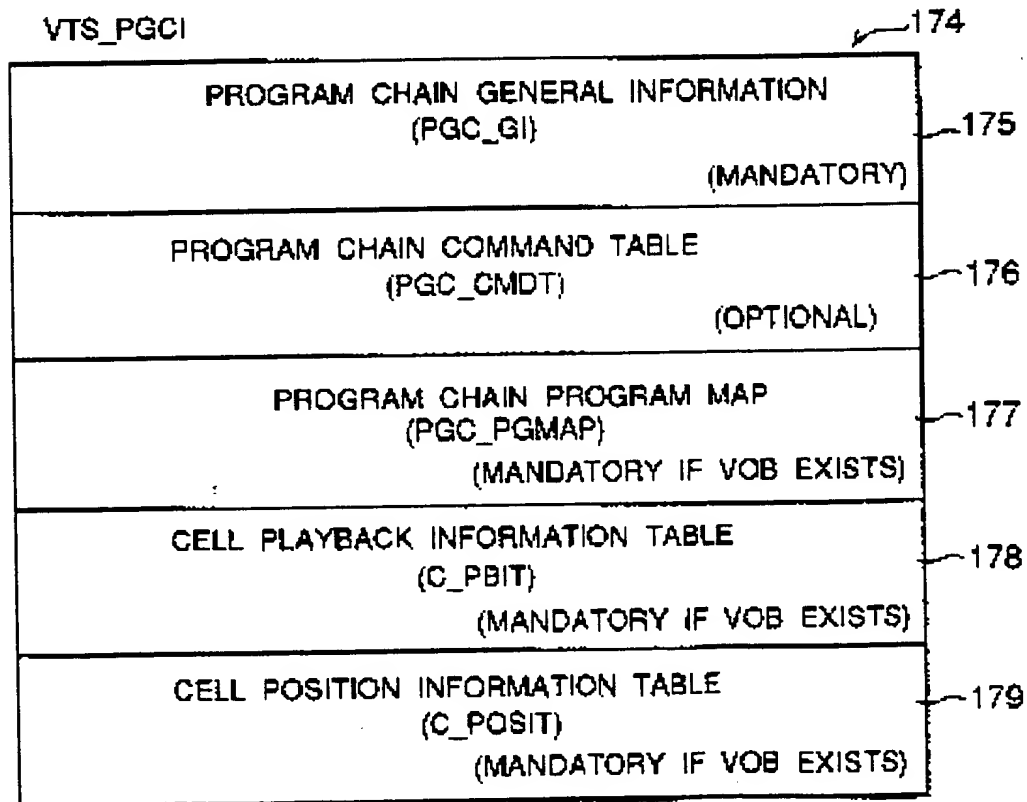


FIG.31

PGC_GI	
	CONTENTS
PGC_CNT	PGC CONTENTS
PGC_PB_TM	PGC PLAYBACK TIME
PGC_UOP_CTL	PGC USER OPERATION CONTROL
PGC_SPST_CTL	PGC SUB-PICTURE STREAM CONTROL
PGC_AST_CTL	PGC AUDIO STREAM CONTROL
PGC_NV_CTL	PGC NAVIGATION CONTROL
PGC_SP_PLT	PGC SUB-PICTURE PALETTE
PGC_NV_CMDT_SA	START ADDRESS OF PGC_NV_CMDT
PGC_PGMAP_SA	START ADDRESS OF PGC_PGMAP
C_PBIT_SA	START ADDRESS OF C_PBIT
C_POSIT_SA	START ADDRESS OF C_POSIT

FIG.32

PGC_PGMAP		106
ENTRY CELL NUMBER FOR PROGRAM #1		
ENTRY CELL NUMBER FOR PROGRAM #2		
⋮		
ENTRY CELL NUMBER FOR PROGRAM #n		

FIG.33

ENTRY CELL NUMBER	
	CONTENT
ECELLN	ENTRY CELL NUMBER

FIG.34

C\_PBIT

178

CELL PLAYBACK INFORMATION #1 (C_PBI #1)
CELL PLAYBACK INFORMATION #2 (C_PBI #2)
:
CELL PLAYBACK INFORMATION #n (C_PBI #n)

FIG.35

C\_PBI

	CONTENT
C_CAT	CELL CATEGORY
C_PBTM	CELL PLAYBACK TIME
C_FVOBU_SA	START ADDRESS OF THE FIRST VOB IN THE CELL
C_LVOBU_SA	START ADDRESS OF THE LAST VOB IN THE CELL
C_LVOBU_EA	END ADDRESS OF THE LAST VOB IN THE CELL

FIG.36

C\_POSI

179


CELL POSITION INFORMATION #1 (C_POSIT #1)
:
CELL POSITION INFORMATION #n (C_POSIT #n)

FIG.37

C\_POSI

	CONTENT
C_VOB_IDN	VOB ID NUMBER OF CELL
C_IDN	CELL ID NUMBER OF THE CELL

FIG.38

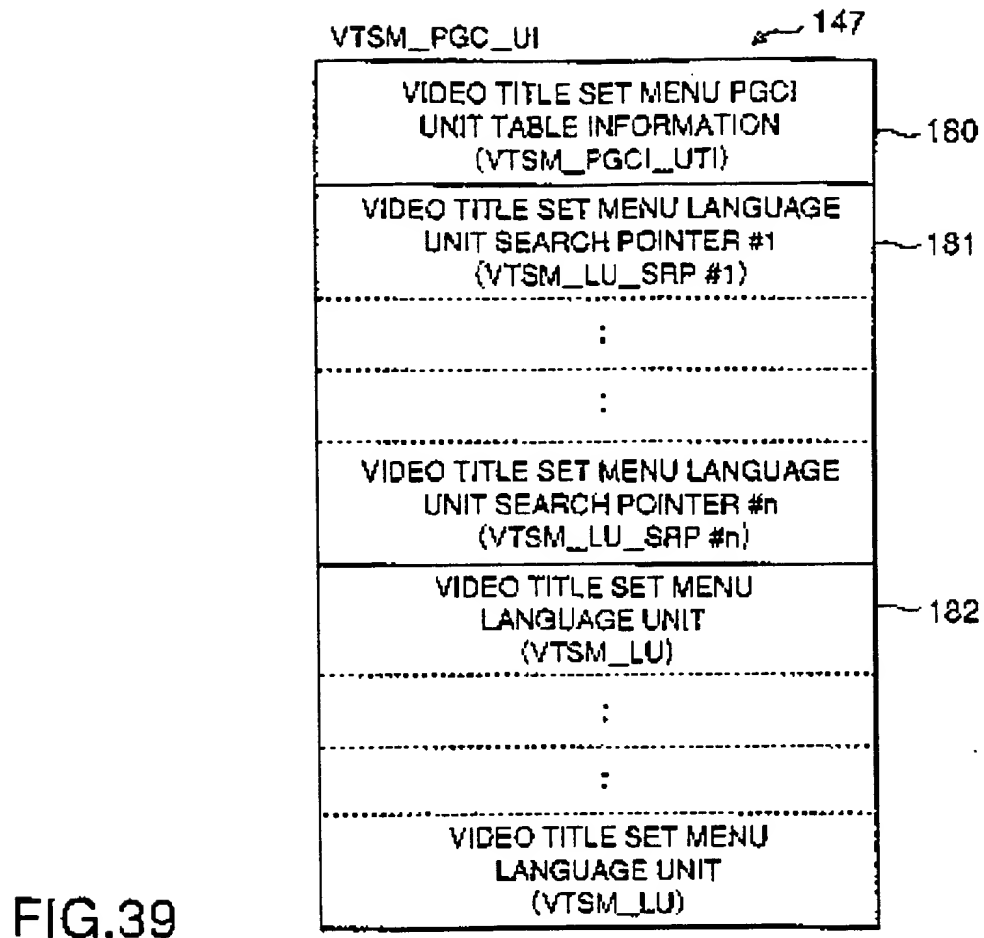


VTSM_PGC_UTI	
	CONTENTS
VTSM_LU_Ns	NUMBER OF VIDEO TITLE SET MENU LANGUAGE UNITS
VTSM_PGC_UT_EA	END ADDRESS OF VTSM_PGC_UT

FIG.40

VTSM_LU_SRP	
	CONTENTS
VTSM_LCD	VIDEO TITLE SET MENU LANGUAGE CODE
VTSM_LU_SA	START ADDRESS OF VTSM_LU

FIG.41

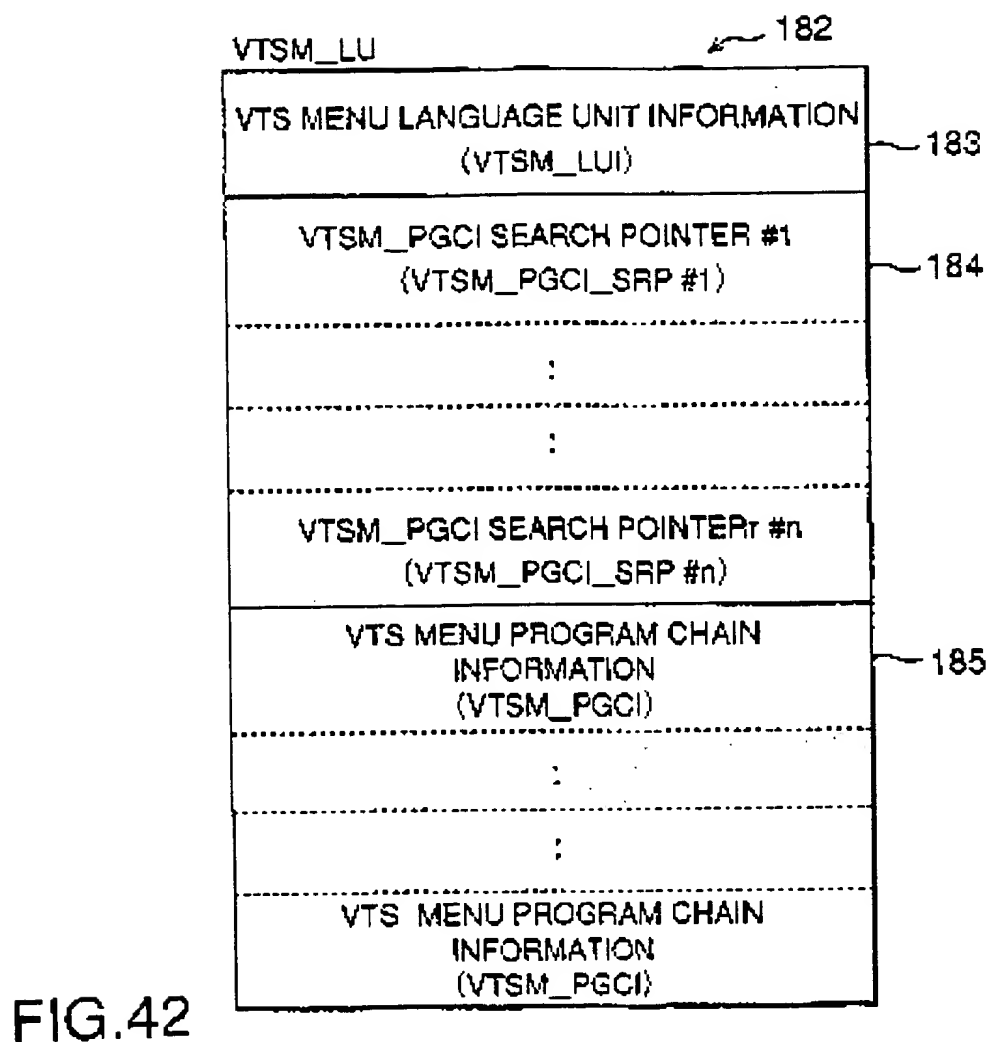

VTSM_LUI	
	CONTENTS
VTSM_PGC_Ns	NUMBER OF VTSM_PGCI_SRP's
VTSM_LU_EA	END ADDRESS OF VTSM_LU

**FIG.43**

VTSM_PGCI_SRP	
	CONTENTS
VTSM_PGC_CAT	VTSM_PGC CATEGORY
VTSM_PGCI_SA	START ADDRESS OF VTSM_PGCI

**FIG.44**



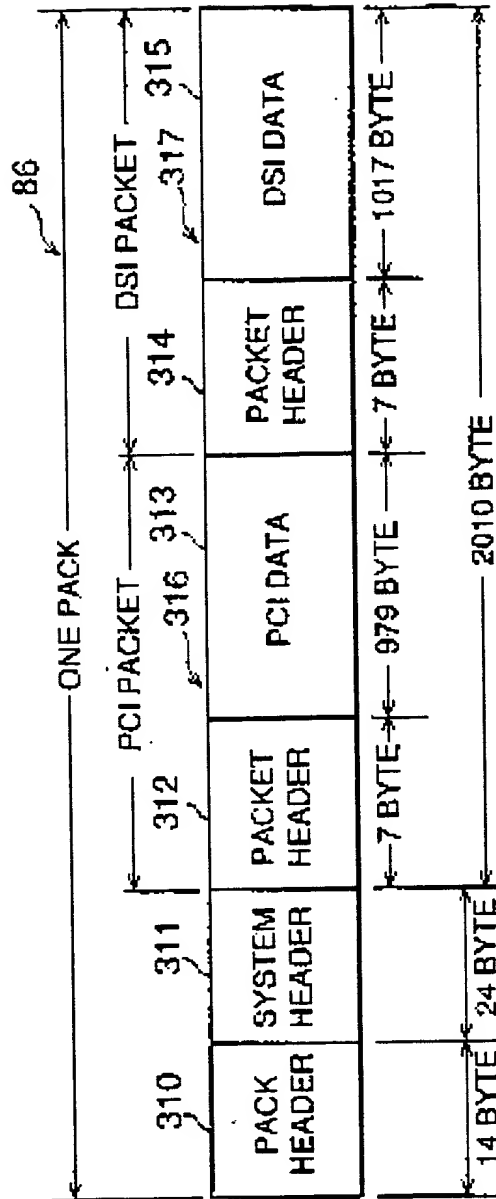


FIG. 45

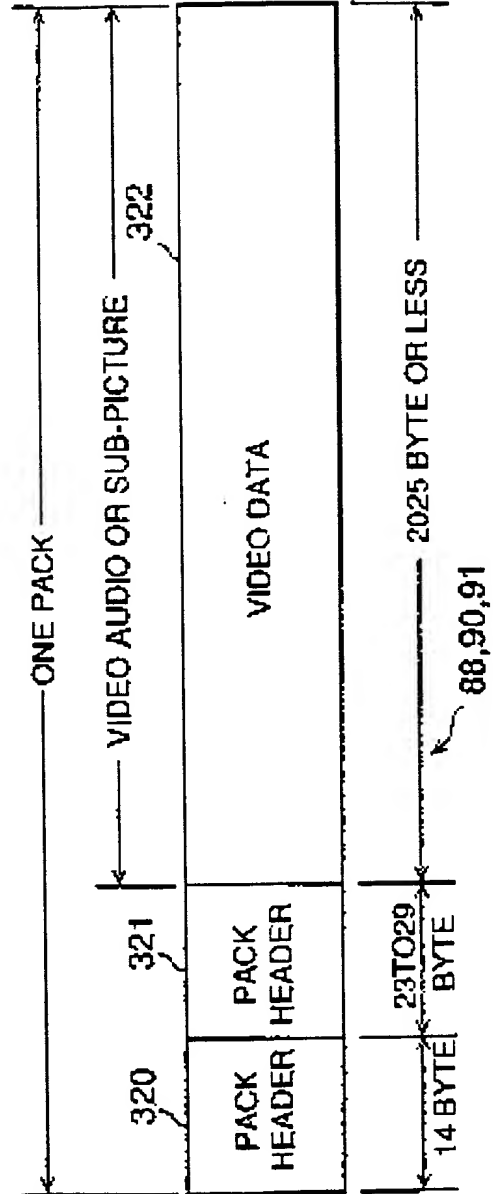


FIG. 46

FIG.47

PCI	
	CONTENT
PCI_GI	PCI GENERAL INFORMATION
NSMLS_ANGLI	ANGLE INFORMATION

FIG.48

PCI_GI	
	CONTENT
NV_PCK_LBN	LBN OF NV PACK
VOBU_CAT	CATEGORY OF VOB
VOBU_S_PTM	START PTM OF VOB
VOBU_E_PTM	END PTM OF VOB
VOBU_SE_E_PTM	END PTM OF SEQUENCE END IN VOB
C_ELTM	CELL ELAPSE TIME

FIG.49

DSI	
	CONTENT
DSI_GI	DSI GENERAL INFORMATION
SML_PBI	SEAMLESS PLAYBACK INFORMATION
SML_ANGI	ANGLE INFORMATION
VOBU_SRI	VOB UNIT SEARCH INFORMATION
SYNCL	SYNCHRONOUS PLAYBACK INFORMATION

DSI\_GI

	CONTENT
NV_PCK_SCR	SCR OF NV PACK
NV_PCK_LBN	LBN OF NV PACK
VOBU_EA	VOBU END ADDRESS
VOBU_1STREF_EA	END ADDRESS OF THE FIRST REFERENCE PICTURE IN VOB
VOBU_2NDREF_EA	END ADDRESS OF THE SECOND REFERENCE PICTURE IN VOB
VOBU_3RDREF_EA	END ADDRESS OF THE THIRD REFERENCE PICTURE IN VOB
VOBU_VOB_IDN	VOBU ID NUMBER
VOBU_C_IDN	CELL ID NUMBER
C_ELTM	CELL ELAPSE TIME

FIG.50

SYNCL	
	CONTENT
A_SYNCA 0 TO 7	TARGET AUDIO PACK ADDRESS
SP_SYNCA 0 TO 31	VOBU START ADDRESS FOR TARGET SP PACK

FIG.51

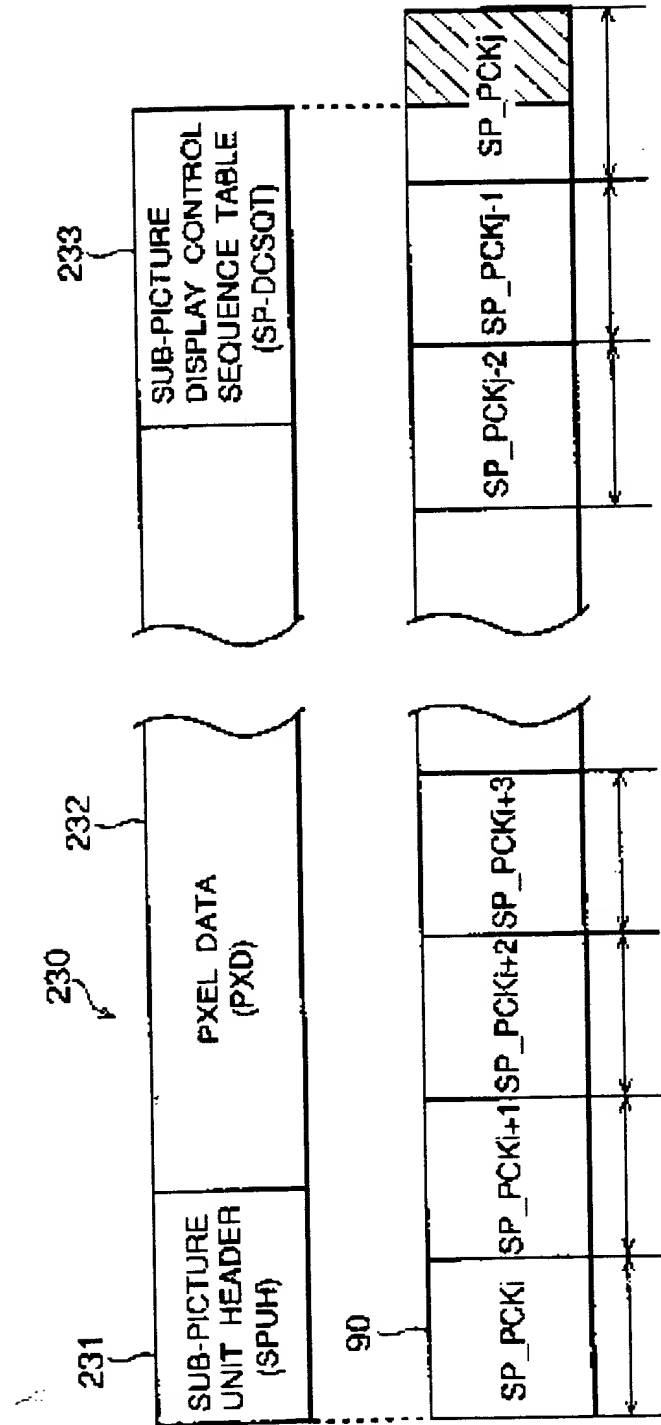


FIG.52

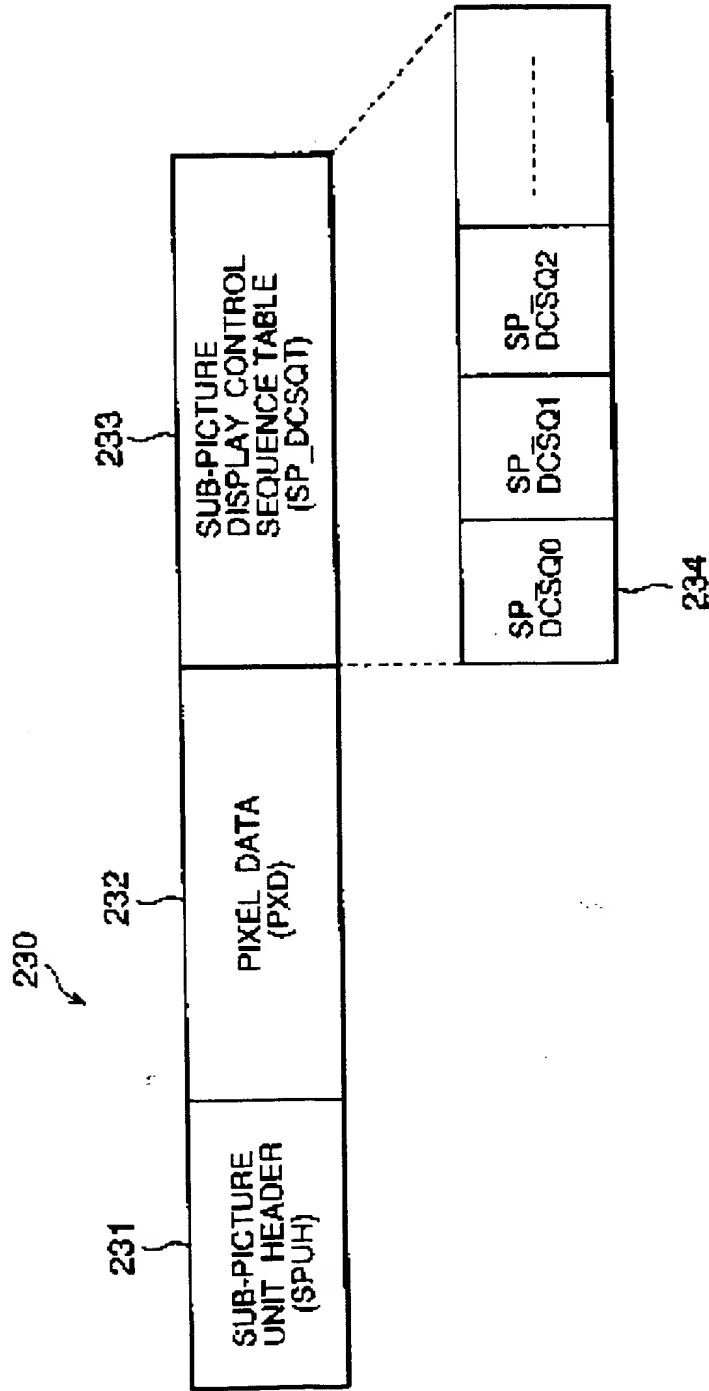


FIG.53

SP_UH	
	CONTENT
SPDSZ	SIZE OF SUB-PICTURE UNIT
SPDCSQTA	START ADDRESS OF DISPLAY SEQUENCE TABLE

FIG.54

SP_DCSQ	
	CONTENT
SP_DCSQ_STM	START TIME OF SP_DCSQ
SP_NXT_DCSQ_SA	START ADDRESS OF THE NEXT SP_DCSQ
SP_DCCMD1	DISPLAY CONTROL COMMAND#1
⋮	⋮
SP_DCCMDn	DISPLAY CONTROL COMMAND#n

FIG.55

SP_DCCMD	
COMMAND NAME	CONTENTS
FSTA_DSP	FORCEDLY SETS DISPLAY START TIMING OF PIXEL DATA
STA_DSP	SETS DISPLAY START TIMING OF PIXEL DATA
STP_DSP	SETS DISPLAY STOP TIMING OF PIXEL DATA
SET_COLOR	SETS COLOR CODE OF PIXEL DATA
SET_CONTR	SETS CONTRAST BETWEEN PIXEL DATA AND MAIN PICTURE
SET_DAREA	SETS DISPLAY AREA OF PIXEL DATA
SET_DSPXA	SETS DISPLAY START ADDRESS OF PIXEL DATA
CHG_COLCON	SETS CHANGE OF COLOR AND CONTRAST FOR PIXEL DATA
CMD_END	END OF DISPLAY CONTROL COMMAND

FIG.56

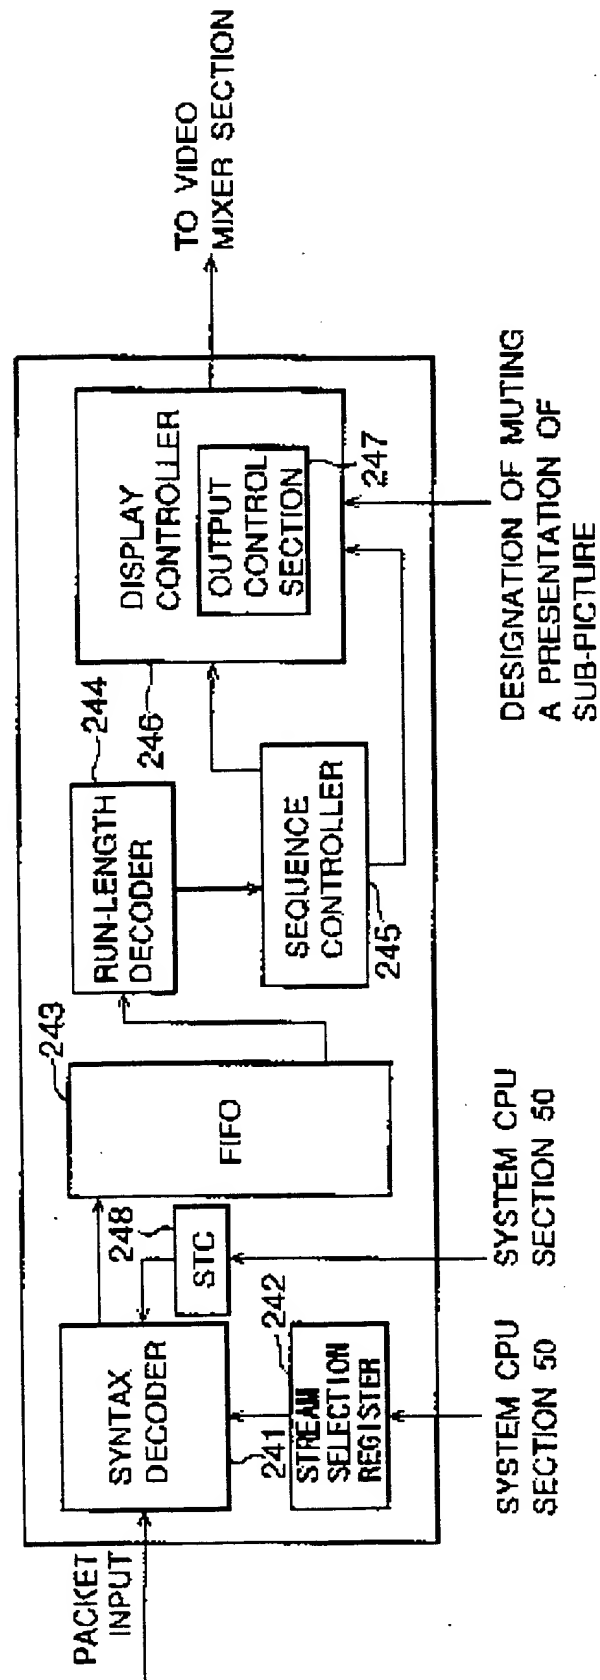


FIG.57

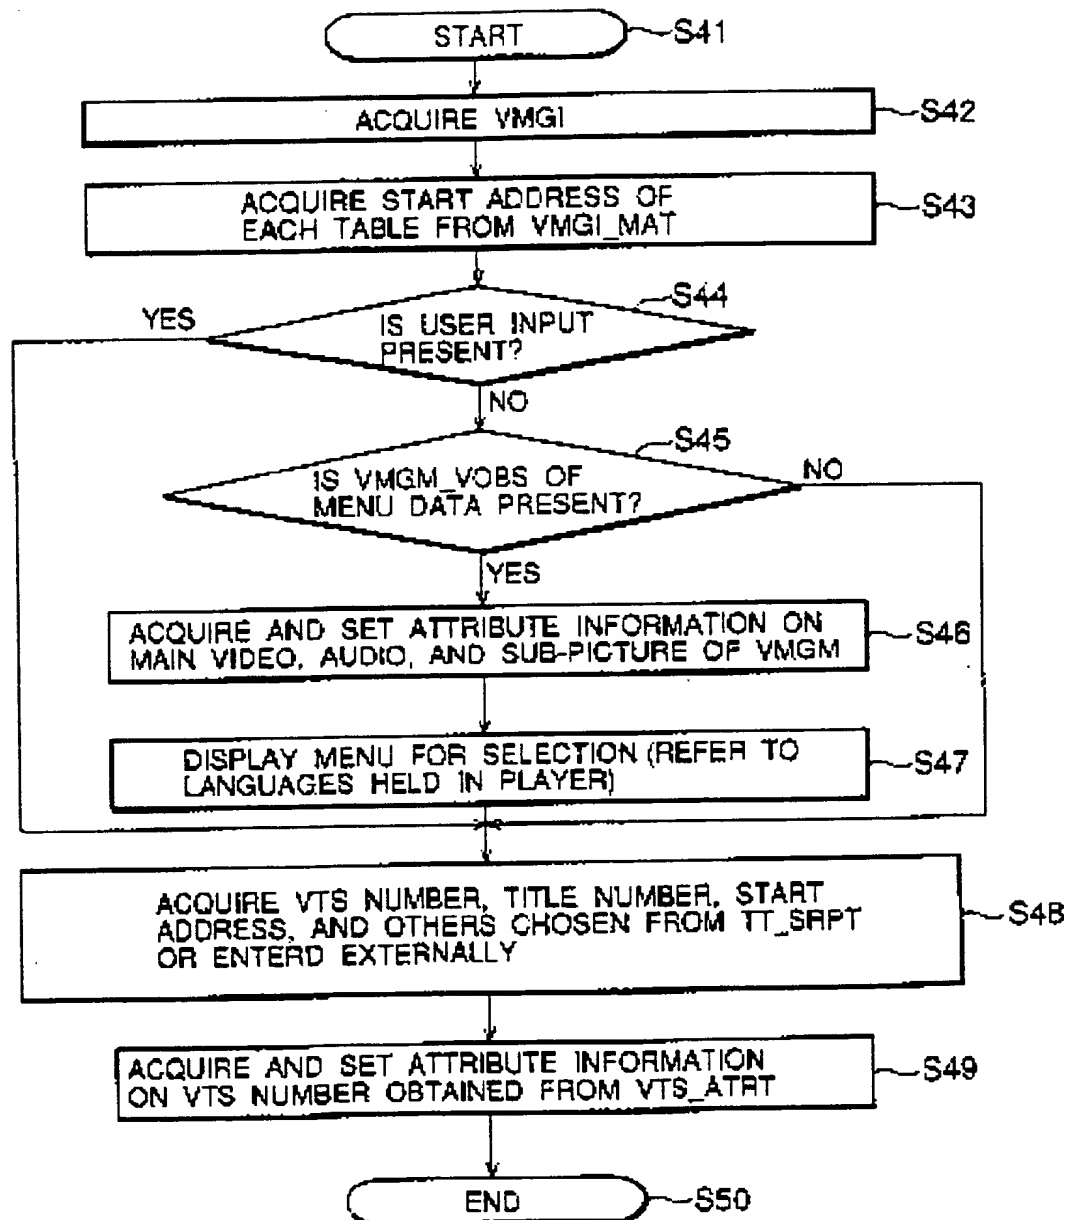


FIG.58

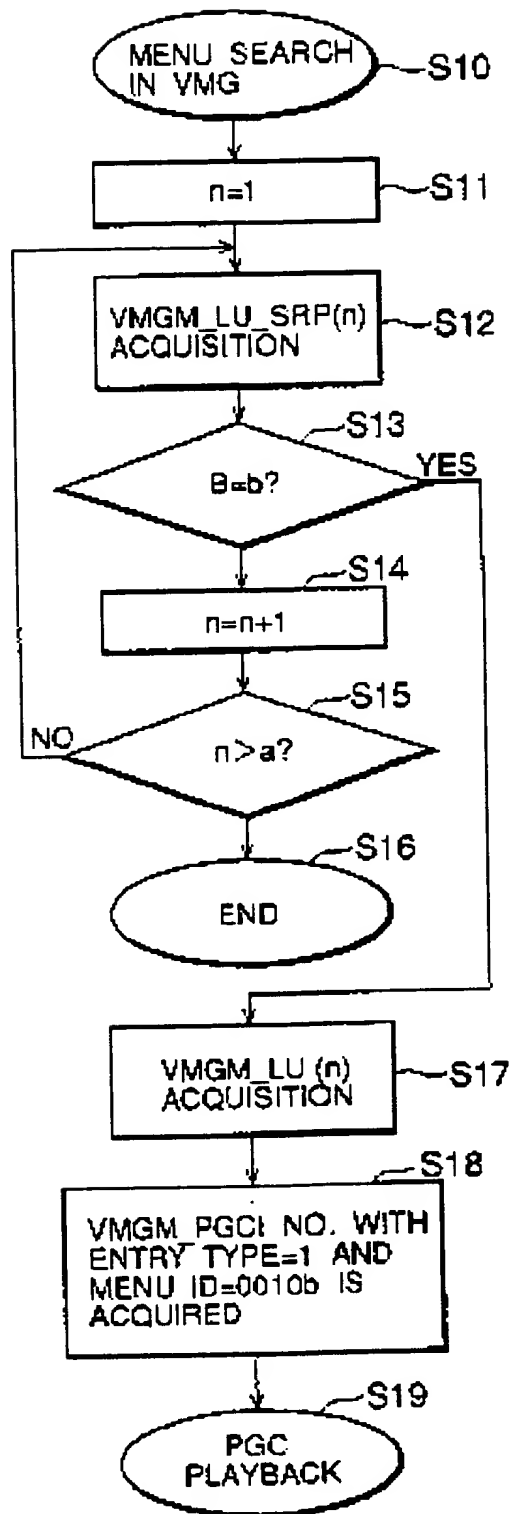


FIG.59

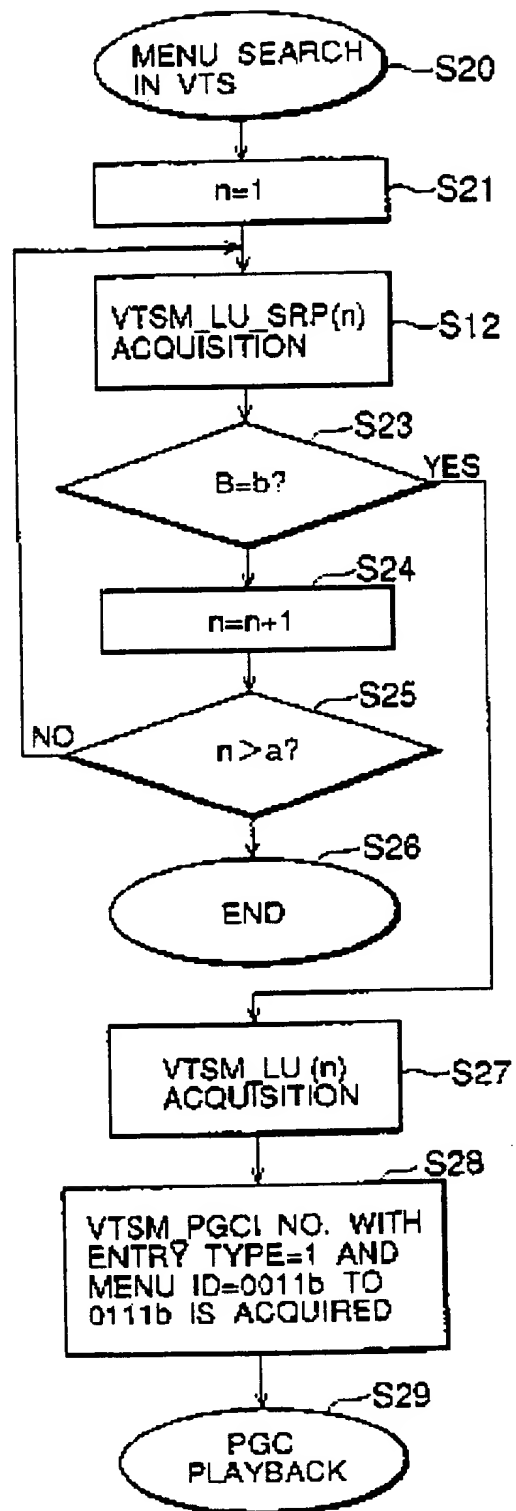


FIG.60



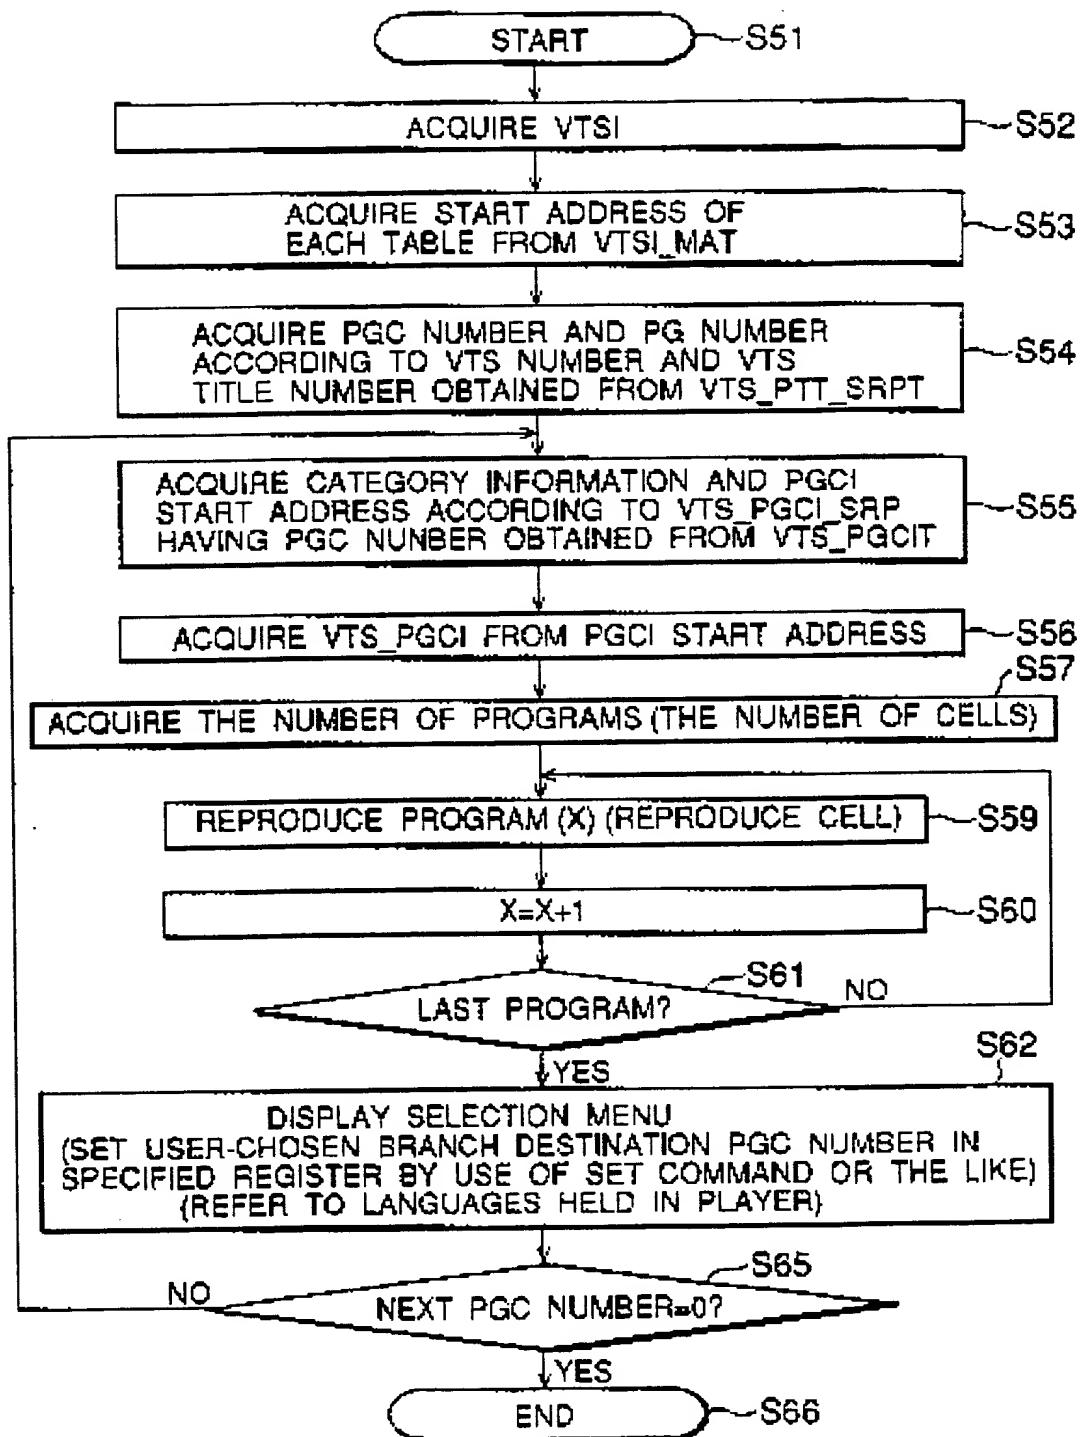


FIG.61

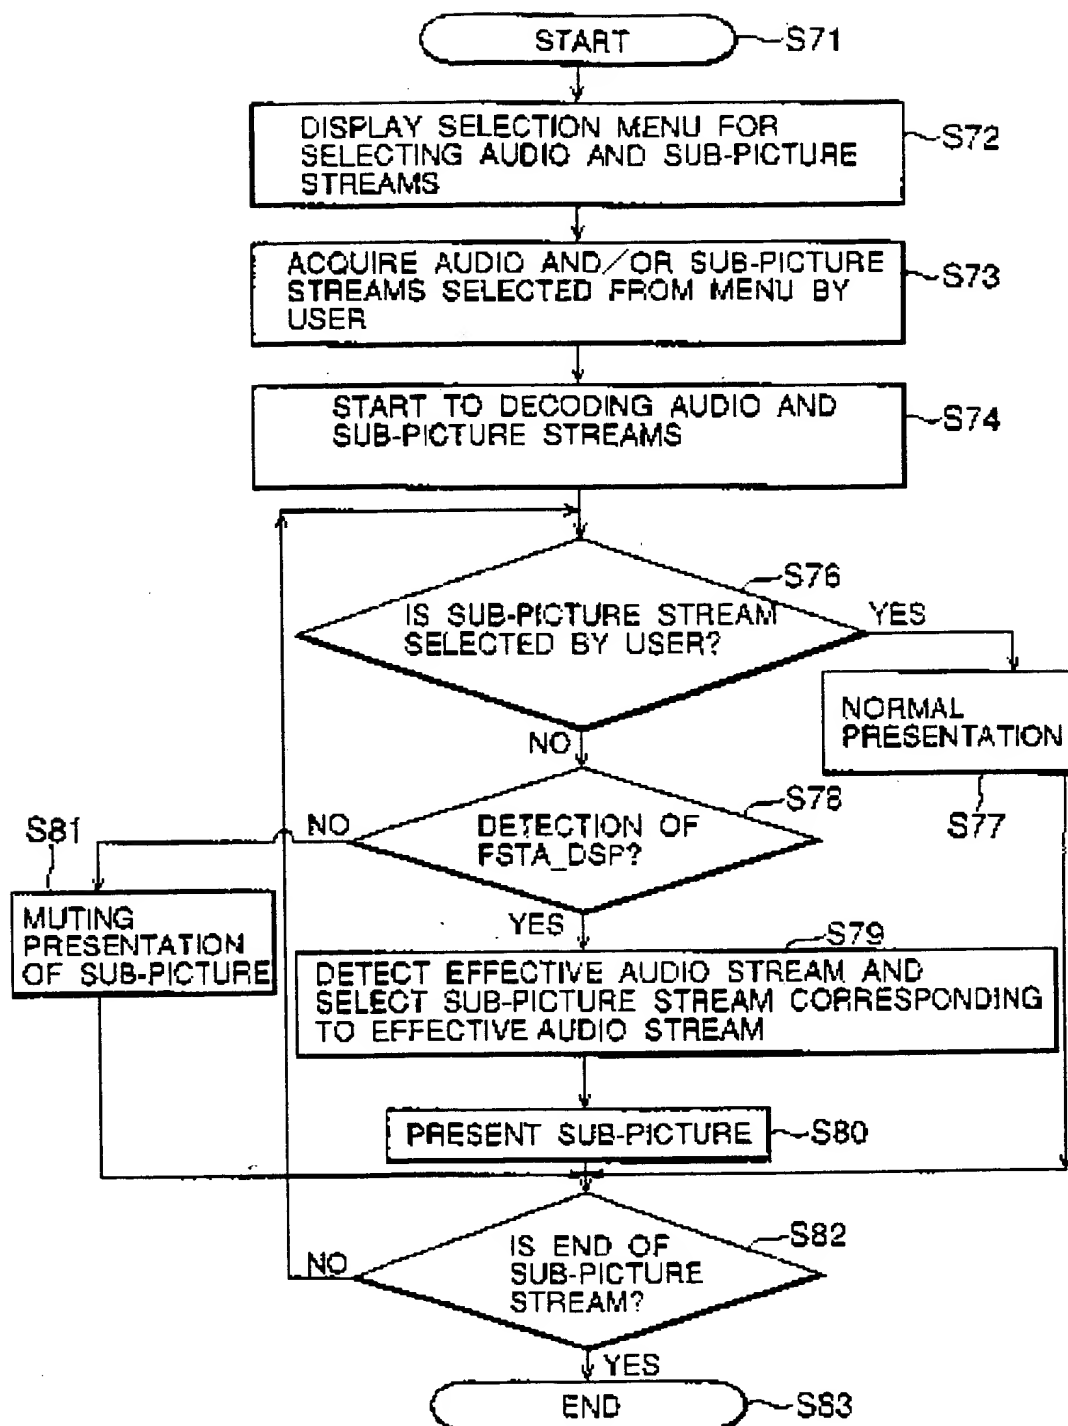


FIG.62

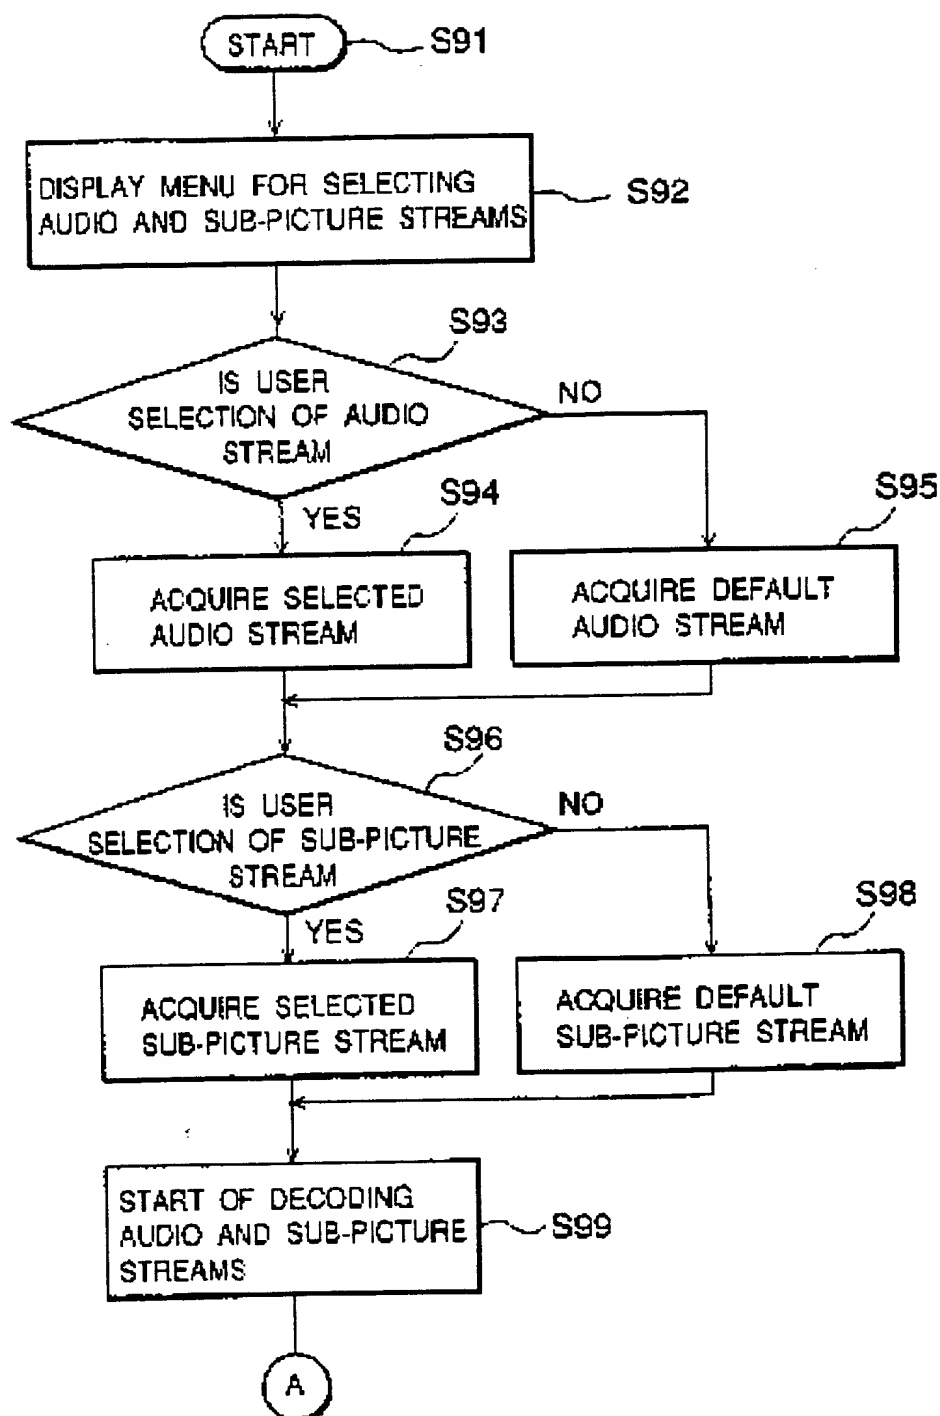


FIG.63A

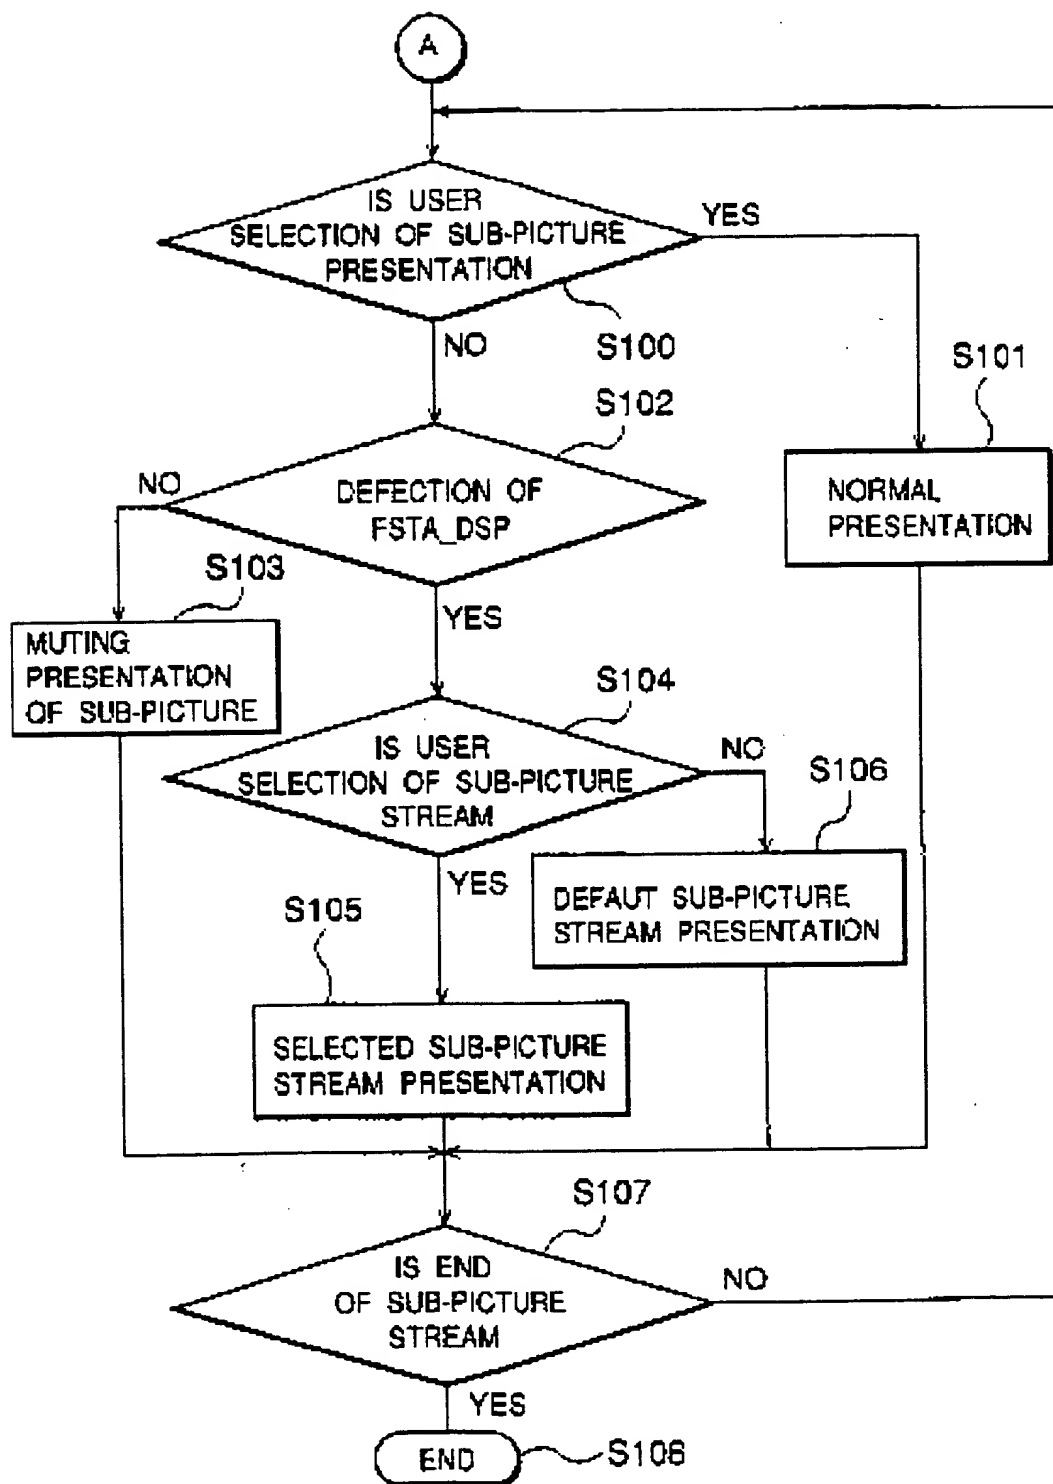


FIG. 63B

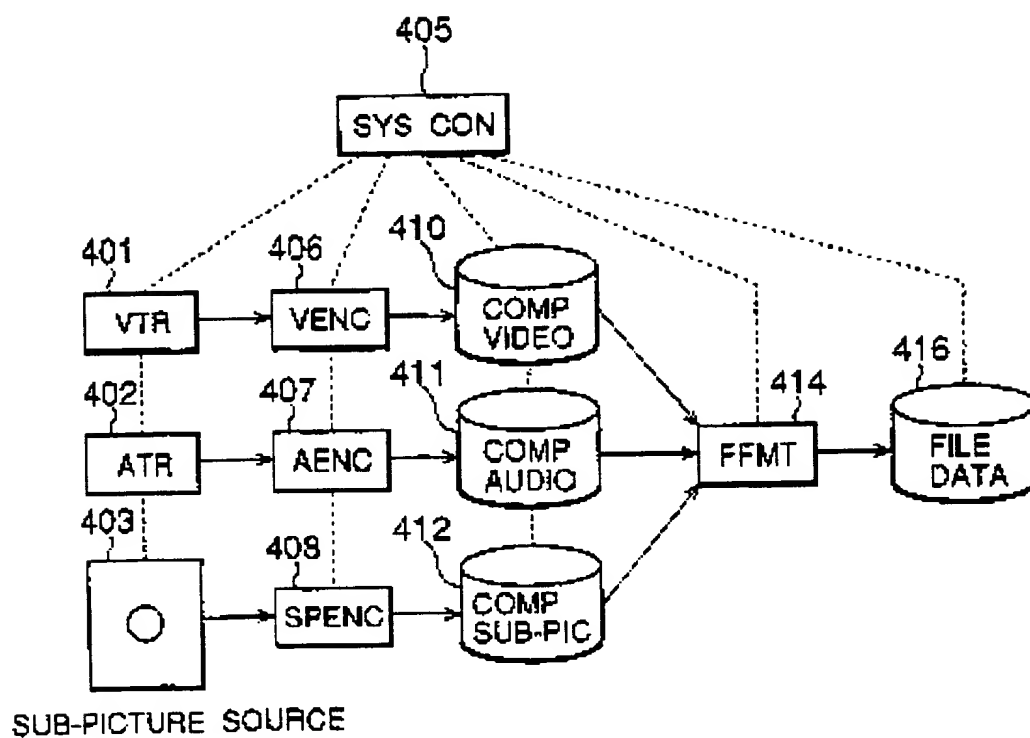


FIG.64

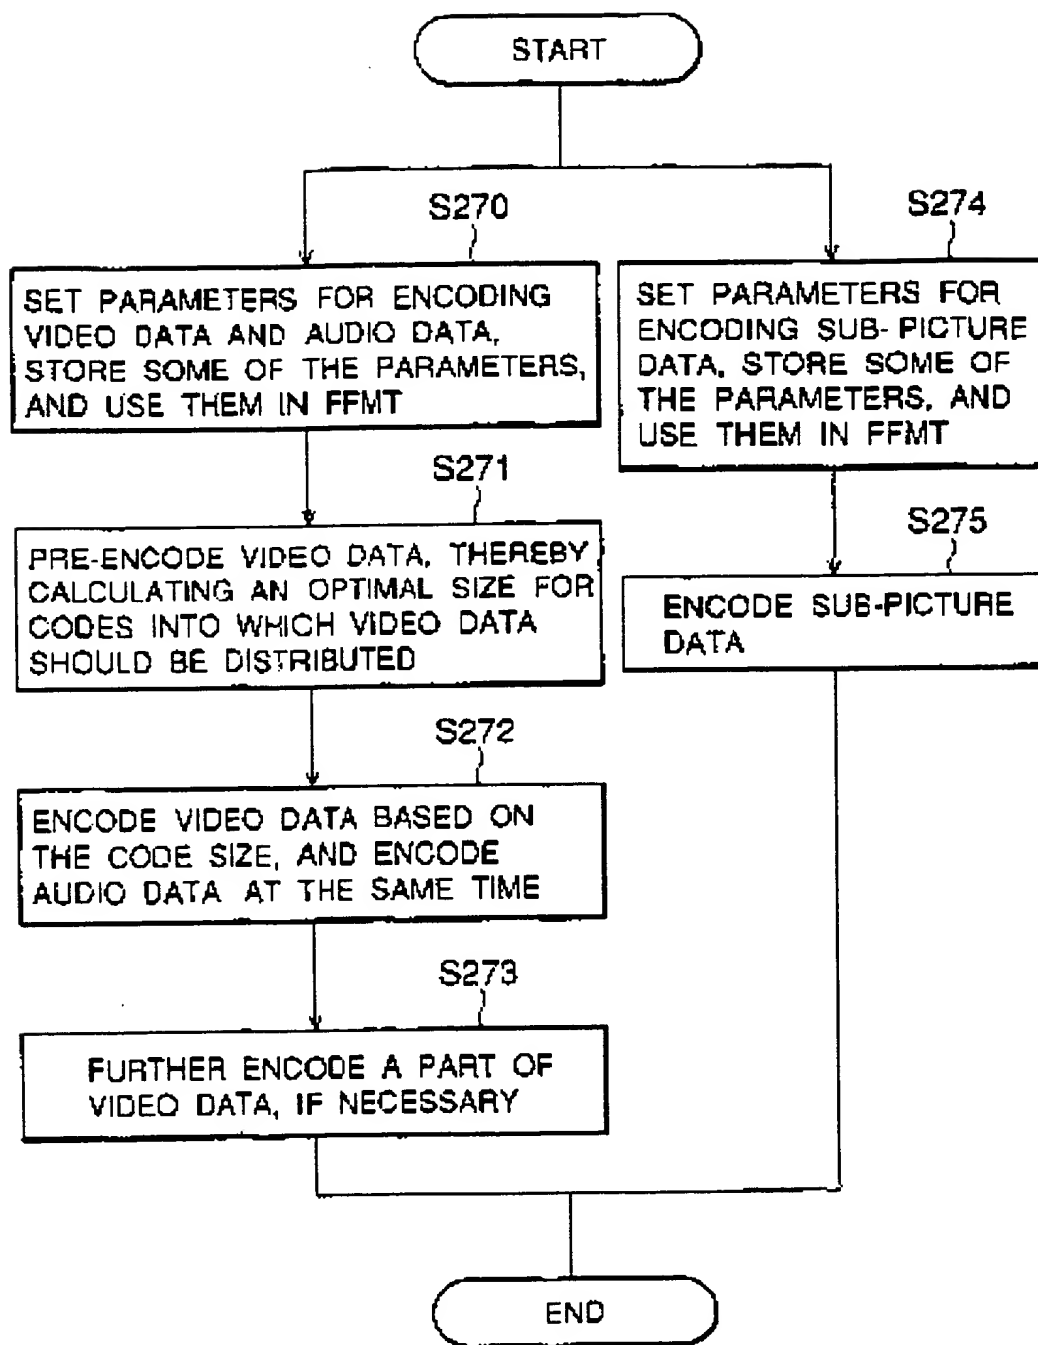


FIG.65

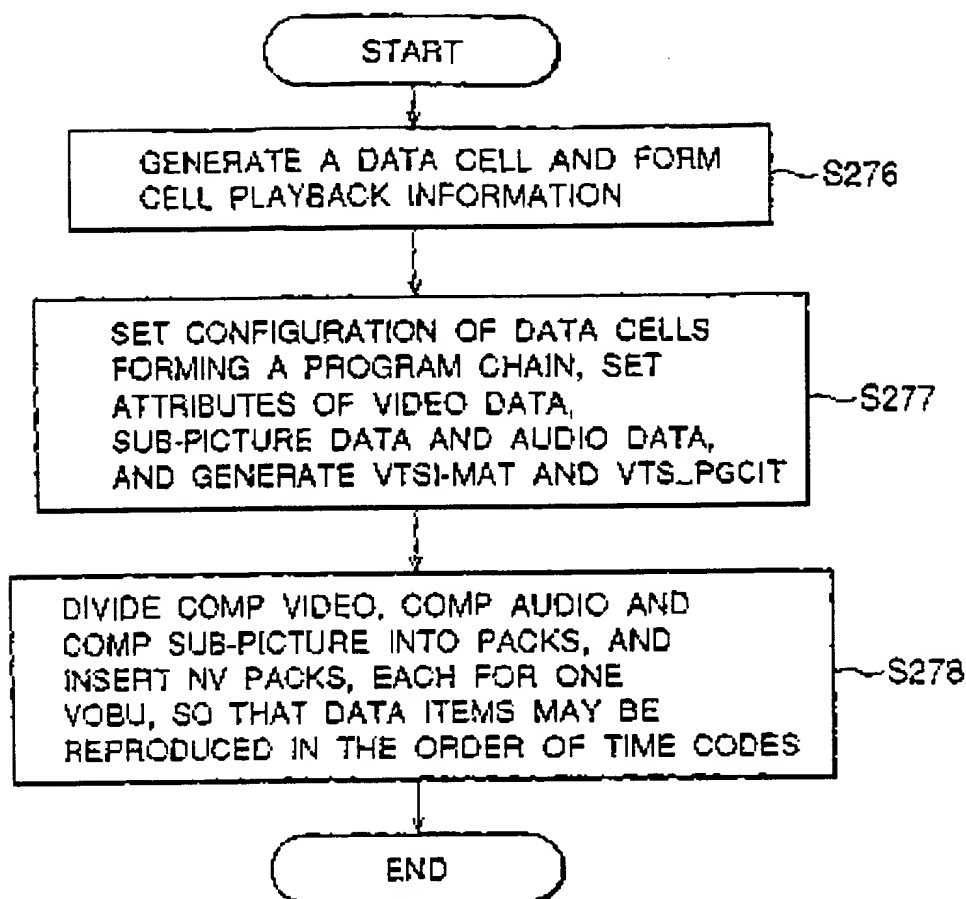


FIG.66

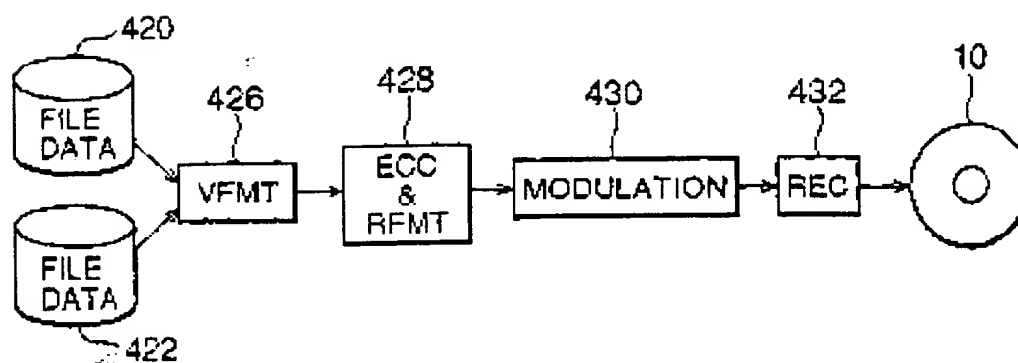


FIG.67

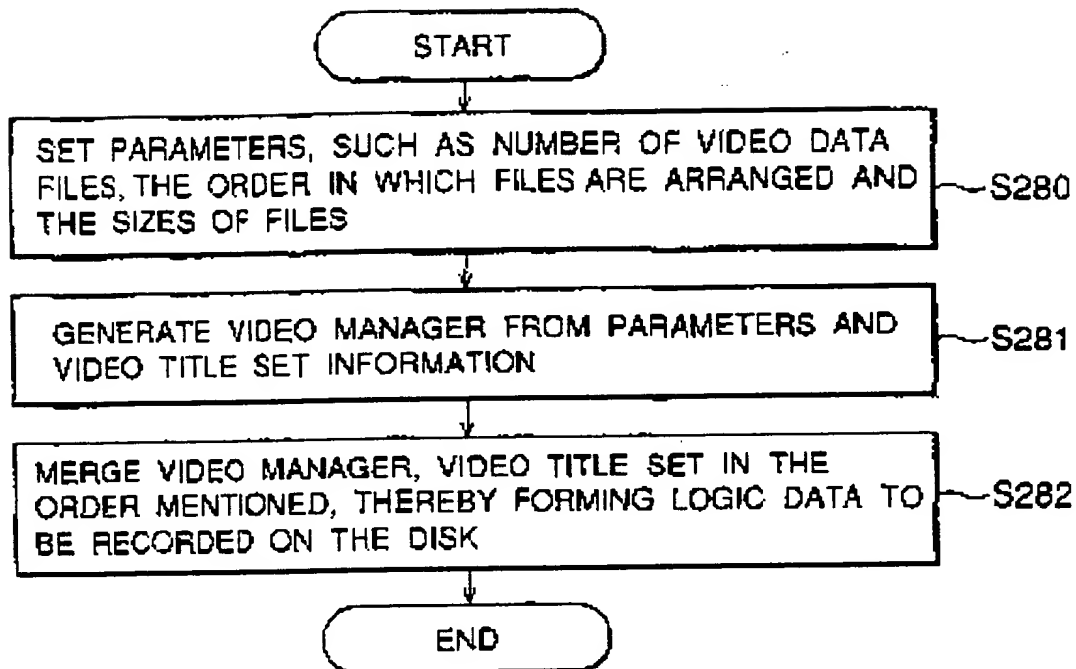


FIG.68

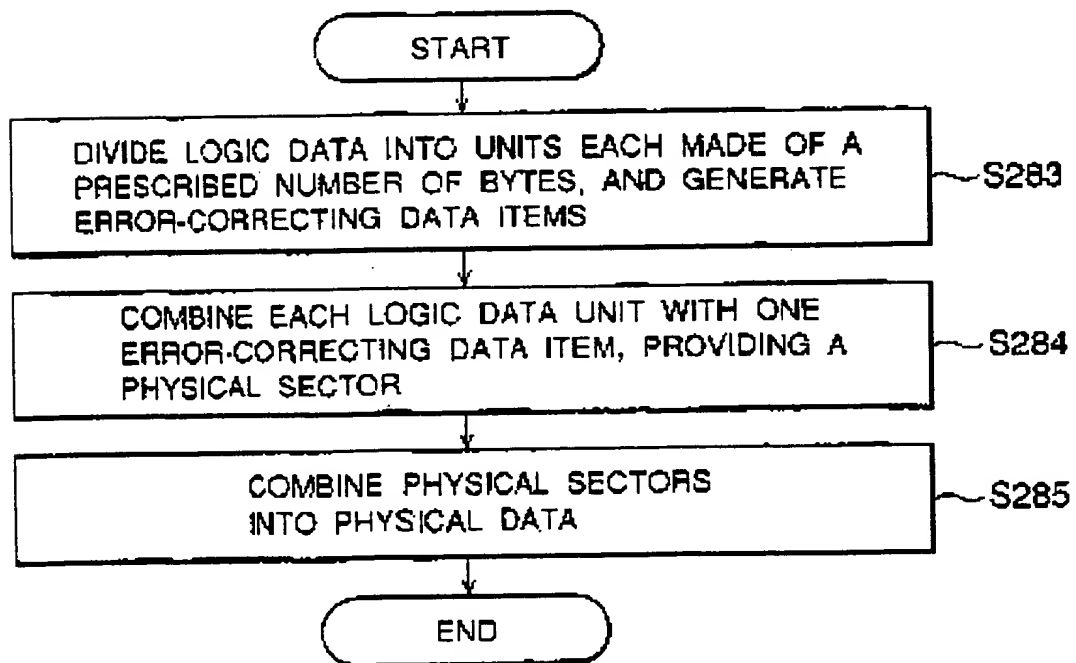


FIG.69




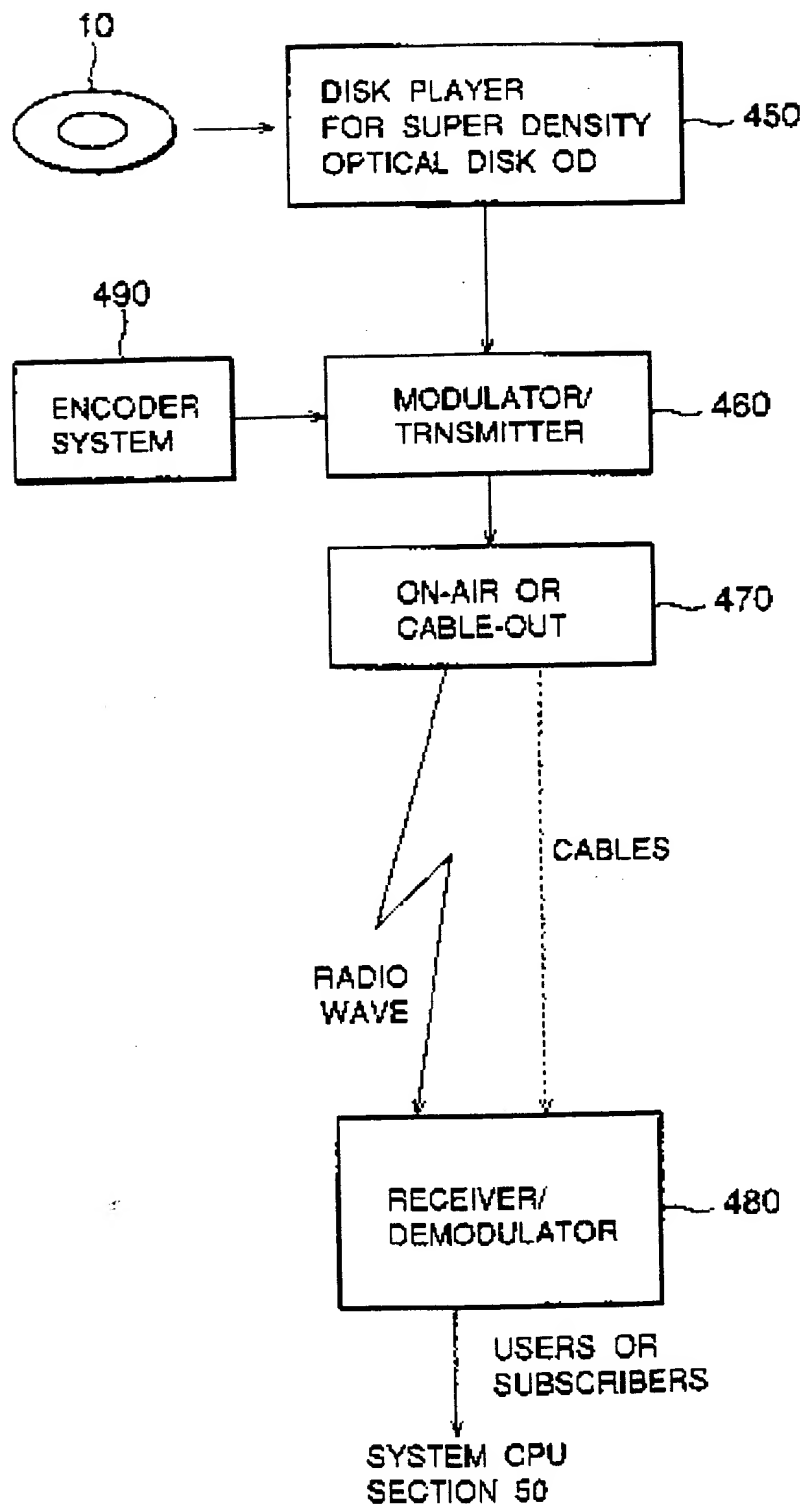


FIG.70

**This Page Blank (uspto)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 808 072 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
14.01.1998 Bulletin 1998/03

(51) Int. Cl.<sup>6</sup>: H04N 9/804

(43) Date of publication A2:  
19.11.1997 Bulletin 1997/47

(21) Application number: 97107797.9

(22) Date of filing: 13.05.1997

(84) Designated Contracting States:  
AT BE CH DE ES FR GB IT LI LU NL SE

(30) Priority: 14.05.1996 JP 119067/96

(71) Applicant:  
KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi (JP)

(72) Inventor:  
Hisatomi, Shuichi,  
c/o K. K. Toshiba, Int Prop Div  
Minato-ku Tokyo 105 (JP)

(74) Representative:  
Henkel, Feiler, Hänzel & Partner  
Möhlstrasse 37  
81675 München (DE)

(54) Recording medium having video data stored therein which is capable of forcibly reproducing sub-picture in accordance with state of reproduction and system for the same

(57) A recording medium (10) is provided in which video data capable of forcibly reproducing a sub-picture in accordance with a state of reproduction is stored. A sub-picture pack sequence (85) for forming a sub-picture data unit (230) stores a unit header, run-length-compressed sub-picture pixel data (232) and a display

sequence table (233). The display sequence table (233) stores a plurality of display sequences (234) and having, described therein, a command for forcibly outputting sub-picture pixel data as the display sequence (234).

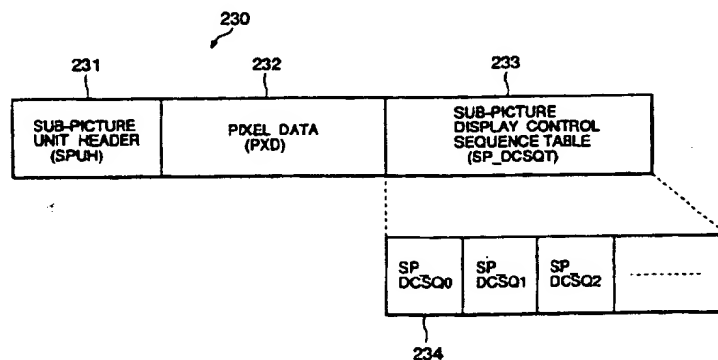


FIG.53

EP 0 808 072 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 10 7797

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 237 426 A (DAITO)  * the whole document *	1,12,23, 34,45,56	H04N9/804
A	EP 0 661 888 A (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD) * column 1, line 1 - column 8, line 56; figures 1,5 *	1,12,23, 34,45,56	
A	EP 0 546 189 A (BINET CO., LTD)  * the whole document *	1,12,23, 34,45,56	
A	EP 0 633 560 A (MITSUBISHI DENKI KABUSHIKI KAISHA) * column 41, line 3 - column 46, line 44; figure 12 *	1,12,23, 34,45,56	
A	WO 94 30014 A (SONY CORPORATION)  * page 8, line 19 - page 12, line 19; figure 2 *	1,12,23, 34,45,56	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04N
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>21 November 1997</b>	Examiner <b>Verleye, J</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (PatC01)